




SHELL-S-21-TW



Product specification

INTERIOR RECESSED DOWNLIGHTS

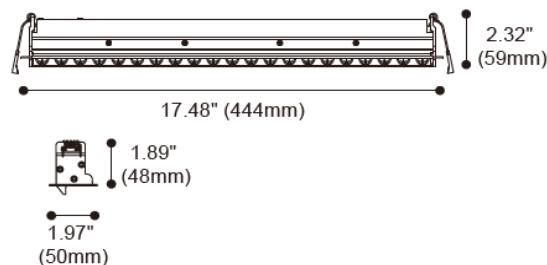

Technical Specification

Article number	2114.418C
LED Consumption	22W
Fixture Consumption	25W
Current / Voltage	500mA / 43.4V
CRI	90+
CCT	3000K
LED Lumen ^{*1}	-
Delivered Lumen	1031lm
Beam Angle available	Wallwash


Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	120-240Vac / 50/60Hz	Output Current / Voltage	500mA / 48Vdc Max.
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	extruded aluminum
Insulation	CLASS II	Reflector	PC
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	non / non	Fixture color available	white / black
Operating temperature	0~35°C		
Average Failure Time	L70(6k) >36000 (h)		

Accessories

Photometric



h(m)	D(m)	E(ix)
Wallwash		
1.0	0.98	805
2.0	1.97	201
3.0	2.96	89
4.0	3.95	50
5.0	4.94	32

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.