




SHELL-D-SF2



Product specification

INTERIOR RECESSED DOWNLIGHTS

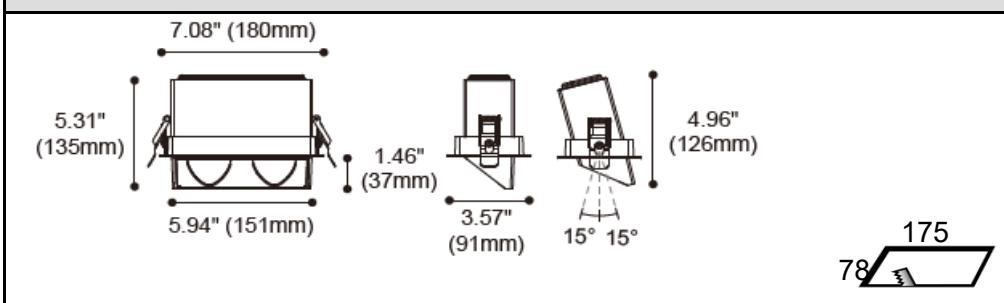

Technical Specification

Article number 2114.429

LED Consumption

Fixture Consumption 33W

Current / Voltage 900mA / 36V

CRI 90+

CCT 3000K

LED Lumen *1 -

Delivered Lumen 2690lm

Beam Angle available Wallwash (Reflector)


Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Optics	PC Reflector
Insulation	CLASS III	Heat sink	extruded aluminum
Protection	IP20	Fixture color available	white / black
Tilt / Rotate	0~30° / None		
Operating temperature	0~35°C		
Average Failure Time	L80(9k)>50000(h)		

Accessories

Photometric



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.56	4380
2.0	1.13	1095
3.0	1.69	486
4.0	2.25	273
5.0	2.82	175

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.