

## Luminaire Photograph



Light Output Ratio:	69.4%	
Luminaire Power:	14.49 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	0.30	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER: LSC20W350LRP 350mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

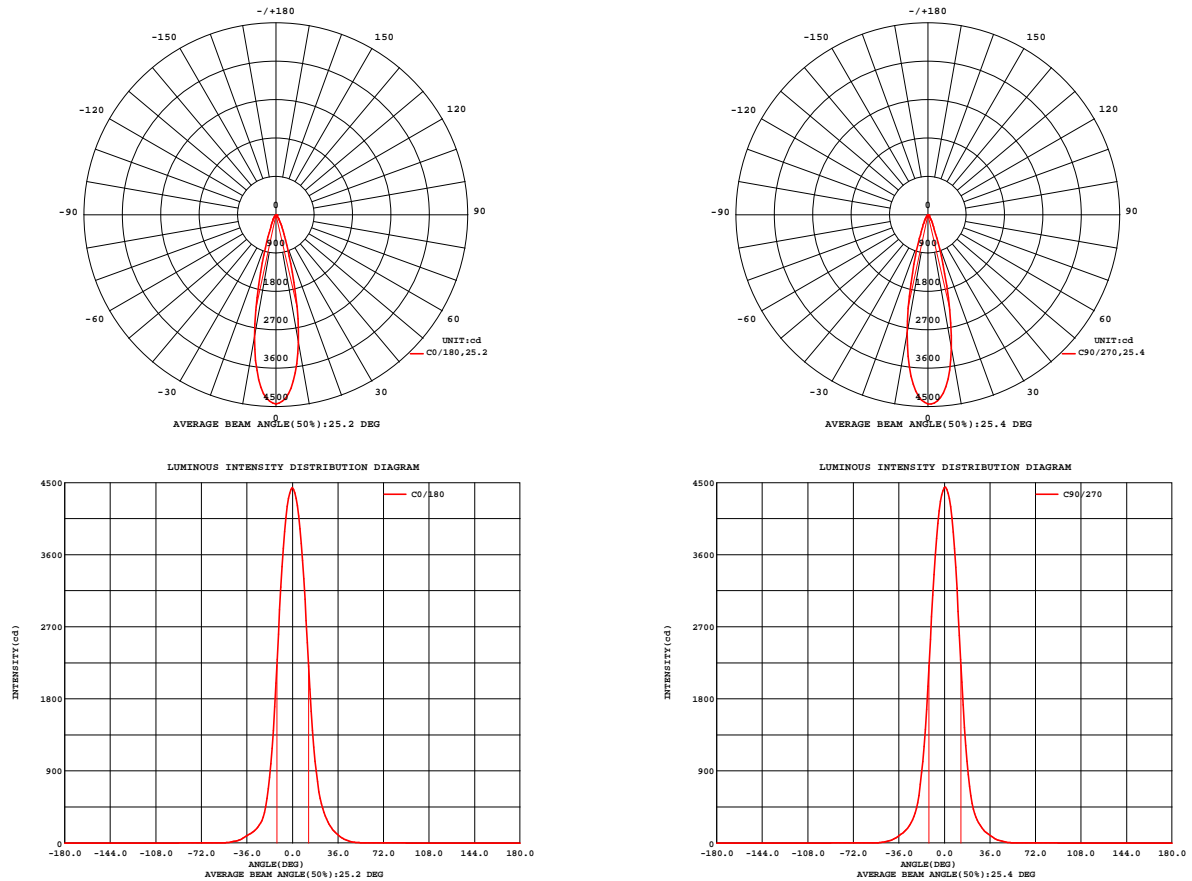


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-2-21


Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G1000-A-83 Ra: 90  
LENSPM-1107A 24R  
DRIVER: LSC20W350LRP 350mA

30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz Lamp Flux:1490.39x1 lm		
NAME: 2115.115	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2502210104
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 71.36 lm/W			
MODEL	Bridgelux	Imax(cd)	4440	S/MH(C0/180)	0.40
NOMINAL POWER(W)	14	LOR(%)	69.4	S/MH(C90/270)	0.40
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1034.2	UP,DN(C0-180)	0.0,36.4
NOMINAL FLUX(lm)	1490.39	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,33.0
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	down(%)	69.4	CIBSE SHR MAX	0.30

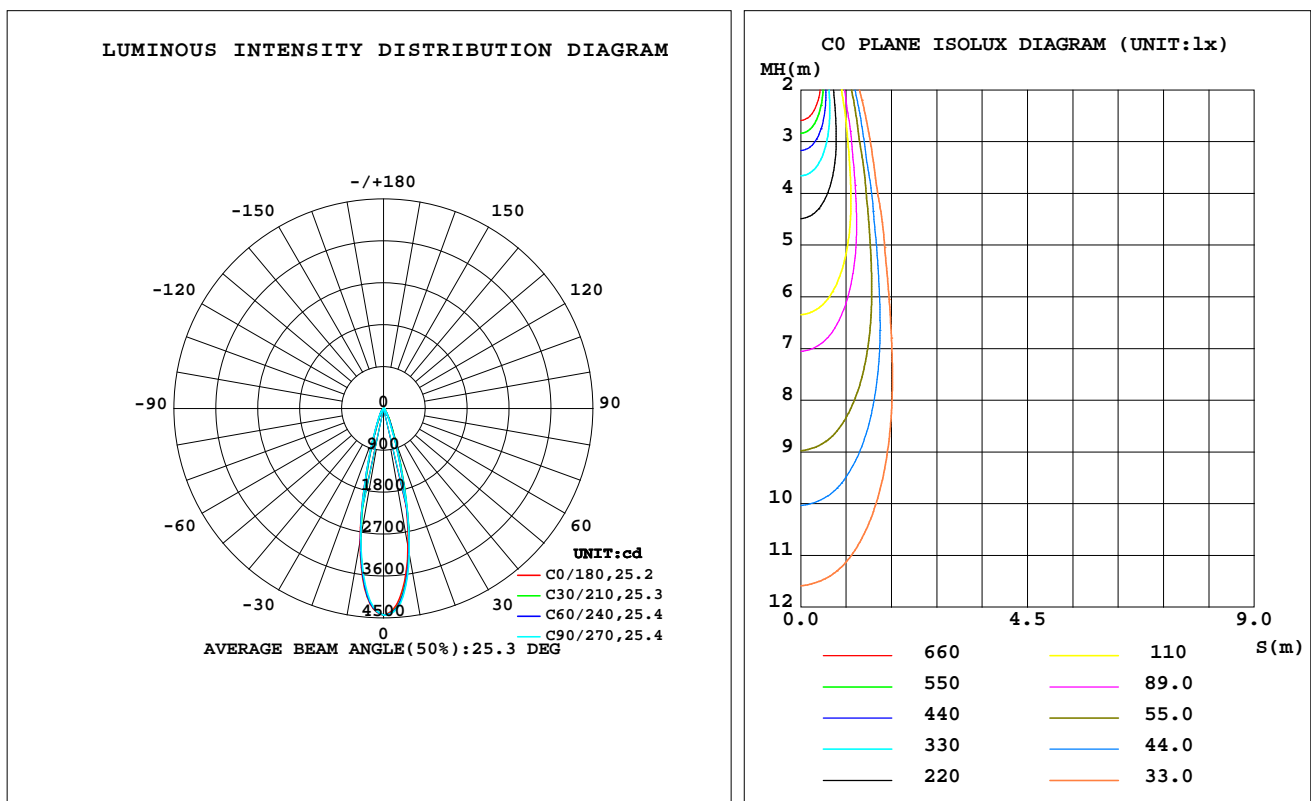

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA

30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	3044	3159	3180	3098	2912	2838	2823	2914	0- 10	354.9	354.9	34.3,23.8
20	763.8	759.5	707.4	657.7	557.1	561.4	594.8	699.1	10- 20	434.0	789.0	76.3,52.9
30	209.0	206.5	180.2	165.1	151.2	154.3	165.8	196.1	20- 30	154.7	943.7	91.3,63.3
40	56.53	58.32	55.63	54.36	51.47	49.29	48.92	52.84	30- 40	67.84	1012	97.8,67.9
50	7.643	7.035	6.811	7.519	6.164	6.335	6.590	6.592	40- 50	19.18	1031	99.7,69.2
60	1.700	1.763	1.696	1.572	1.523	1.398	1.352	1.463	50- 60	2.901	1034	99.9,69.4
70	0.0448	0.0390	0.0515	0.0381	0.0332	0.0257	0.0298	0.0253	60- 70	0.5315	1034	100,69.4
80	0.0305	0.0152	0.0232	0.0140	0.0233	0.0117	0.0248	0.0122	70- 80	0.0245	1034	100,69.4
90	0	0	0	0	0	0	0	0	80- 90	0.0156	1034	100,69.4
100	0	0	0	0	0	0	0	0	90-100	0	1034	100,69.4
110	0	0	0	0	0	0	0	0	100-110	0	1034	100,69.4
120	0	0	0	0	0	0	0	0	110-120	0	1034	100,69.4
130	0	0	0	0	0	0	0	0	120-130	0	1034	100,69.4
140	0	0	0	0	0	0	0	0	130-140	0	1034	100,69.4
150	0	0	0	0	0	0	0	0	140-150	0	1034	100,69.4
160	0	0	0	0	0	0	0	0	150-160	0	1034	100,69.4
170	0	0	0	0	0	0	0	0	160-170	0	1034	100,69.4
180	0	0	0	0	0	0	0	0	170-180	0	1034	100,69.4
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA

30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz  
Lamp Flux:1490.39x1 lm

NAME: 2115.115

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2502210104

MFR.: RISE

SUR.: 0.002826m2

Shielding Angle:

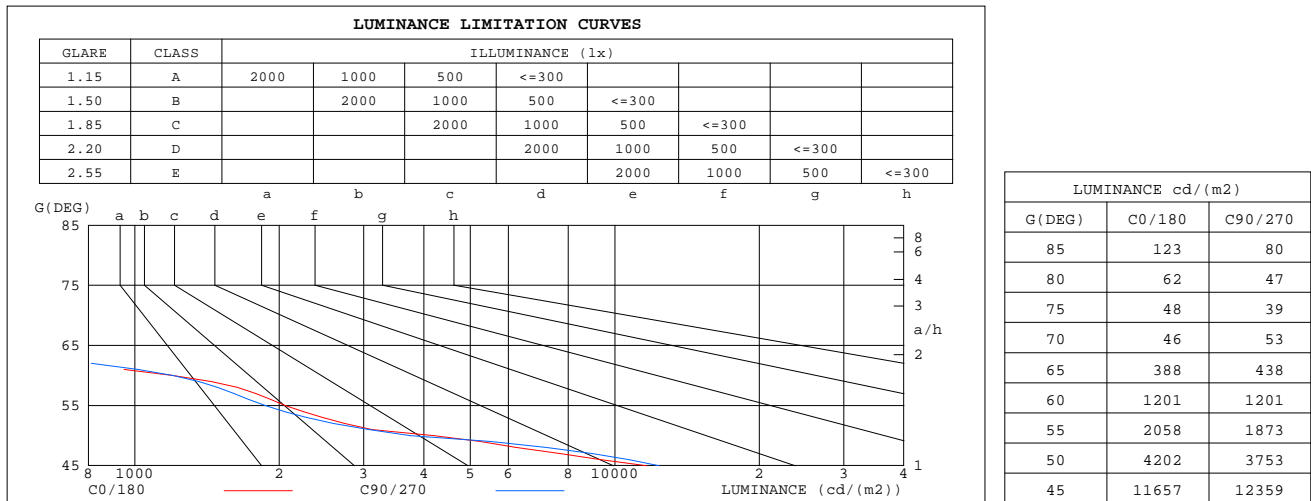

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA


30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz  
Lamp Flux:1490.39x1 lm

NAME: 2115.115	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2502210104
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

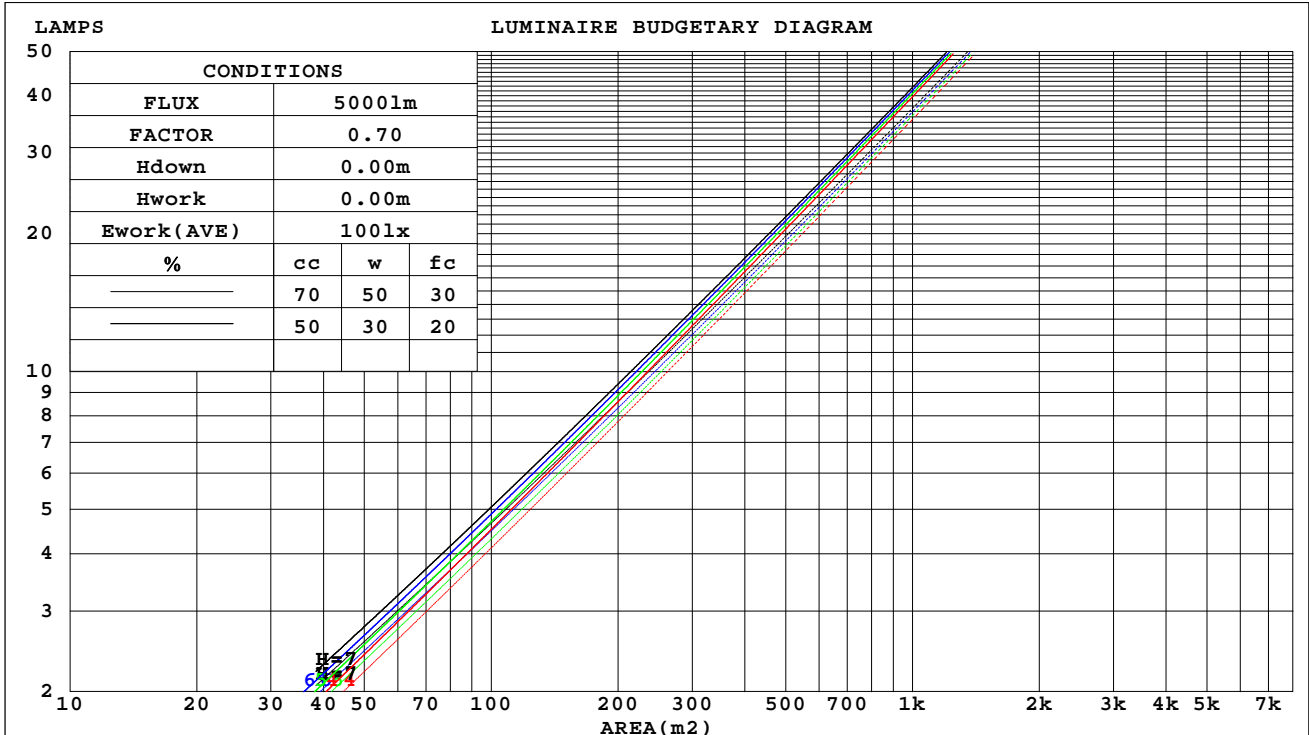

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA

30minutes warm-up

### WEC AND CCEC

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz Lamp Flux:1490.39x1 lm		
NAME: 2115.115	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2502210104
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.097	.055	.017	.092	.053	.017	.084	.048	.015	.076	.044	.014	.069	.040	.013	
2.0	.090	.050	.015	.087	.048	.015	.080	.044	.014	.073	.041	.013	.067	.038	.012	
3.0	.085	.045	.013	.081	.044	.013	.076	.041	.012	.070	.038	.012	.065	.036	.011	
4.0	.080	.041	.012	.077	.040	.012	.072	.038	.011	.067	.036	.011	.063	.034	.010	
5.0	.075	.038	.011	.073	.037	.011	.068	.036	.010	.064	.034	.010	.061	.032	.010	
6.0	.071	.036	.010	.069	.035	.010	.065	.034	.010	.062	.032	.009	.059	.031	.009	
7.0	.068	.033	.009	.066	.033	.009	.063	.032	.009	.060	.031	.009	.057	.030	.009	
8.0	.064	.031	.009	.063	.031	.009	.060	.030	.009	.057	.029	.008	.055	.028	.008	
9.0	.062	.030	.008	.060	.029	.008	.058	.029	.008	.055	.028	.008	.053	.027	.008	
10.0	.059	.028	.008	.058	.028	.008	.056	.027	.008	.054	.027	.008	.052	.026	.007	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.132	.132	.132	.113	.113	.113	.077	.077	.077	.044	.044	.044	.014	.014	.014	
1.0	.117	.109	.103	.100	.094	.088	.068	.065	.061	.039	.037	.036	.013	.012	.011	
2.0	.105	.092	.082	.090	.079	.071	.061	.055	.049	.035	.032	.029	.011	.010	.009	
3.0	.094	.079	.066	.081	.068	.057	.056	.047	.040	.032	.028	.024	.010	.009	.008	
4.0	.086	.068	.054	.074	.059	.047	.051	.041	.033	.029	.024	.020	.009	.008	.006	
5.0	.079	.059	.045	.068	.051	.039	.047	.036	.028	.027	.021	.017	.009	.007	.005	
6.0	.073	.053	.038	.062	.046	.033	.043	.032	.024	.025	.019	.014	.008	.006	.005	
7.0	.067	.047	.033	.058	.041	.028	.040	.029	.020	.023	.017	.012	.008	.006	.004	
8.0	.063	.042	.028	.054	.037	.025	.037	.026	.017	.022	.015	.010	.007	.005	.003	
9.0	.059	.038	.024	.051	.033	.021	.035	.023	.015	.021	.014	.009	.007	.005	.003	
10.0	.056	.035	.021	.048	.031	.019	.033	.021	.013	.019	.013	.008	.006	.004	.003	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA

30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz Lamp Flux:1490.39x1 lm										
NAME: 2115.115					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2502210104		
MFR.: RISE					SUR.: 0.002826m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.5	13.2	12.7	13.3	13.5	11.9	12.6	12.1	12.7	12.9
3H	12.3	13.0	12.6	13.1	13.3	11.7	12.4	12.0	12.5	12.7
4H	12.2	12.8	12.5	13.1	13.3	11.7	12.3	11.9	12.5	12.7
6H	12.2	12.7	12.4	13.0	13.2	11.6	12.1	11.8	12.4	12.6
8H	12.1	12.7	12.4	12.9	13.2	11.5	12.1	11.8	12.3	12.6
12H	12.1	12.6	12.4	12.9	13.1	11.5	12.0	11.8	12.3	12.5
4H 2H	12.3	12.9	12.5	13.1	13.3	11.7	12.3	11.9	12.5	12.7
3H	12.1	12.6	12.4	12.9	13.1	11.5	12.0	11.8	12.3	12.5
4H	12.0	12.5	12.3	12.8	13.1	11.4	11.9	11.7	12.2	12.5
6H	11.9	12.3	12.3	12.6	13.0	11.3	11.7	11.7	12.0	12.4
8H	11.8	12.2	12.2	12.6	12.9	11.2	11.6	11.6	12.0	12.3
12H	11.8	12.1	12.2	12.5	12.9	11.2	11.5	11.6	11.9	12.3
8H 4H	11.8	12.2	12.2	12.6	12.9	11.2	11.6	11.6	12.0	12.3
6H	11.7	12.0	12.1	12.4	12.8	11.1	11.4	11.5	11.8	12.3
8H	11.7	11.9	12.1	12.4	12.8	11.1	11.4	11.5	11.8	12.2
12H	11.6	11.8	12.1	12.3	12.7	11.0	11.2	11.5	11.7	12.2
12H 4H	11.8	12.1	12.2	12.5	12.9	11.2	11.5	11.6	11.9	12.3
6H	11.7	11.9	12.1	12.4	12.8	11.1	11.4	11.5	11.8	12.2
8H	11.6	11.8	12.1	12.3	12.7	11.0	11.2	11.5	11.7	12.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.1 / -13.9					+ 3.3 / -14.1				
1.5H	+ 5.4 / -11.2					+ 5.6 / -11.3				
2.0H	+ 7.0 / -11.3					+ 7.4 / -11.9				

CIE Pub.117, 1490 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.4)  
Area: 0.002826 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA

30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz Lamp Flux:1490.39x1 lm		
NAME: 2115.115	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2502210104
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	63	59	56	62	58	56	62	58	56	54
0.80	67	64	61	67	64	61	66	63	61	59
1.00	70	67	64	70	66	64	69	66	64	61
1.25	73	69	67	72	69	67	71	68	66	64
1.50	74	71	69	74	71	69	72	70	68	65
2.00	76	73	71	75	73	71	73	71	70	66
2.50	77	75	73	76	74	72	74	72	71	67
3.00	78	76	74	77	75	73	75	73	72	68
4.00	79	78	76	78	77	75	76	74	73	69
5.00	80	79	78	79	78	77	76	75	74	69
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA

30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz Lamp Flux:1490.39x1 lm		
NAME: 2115.115	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2502210104
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

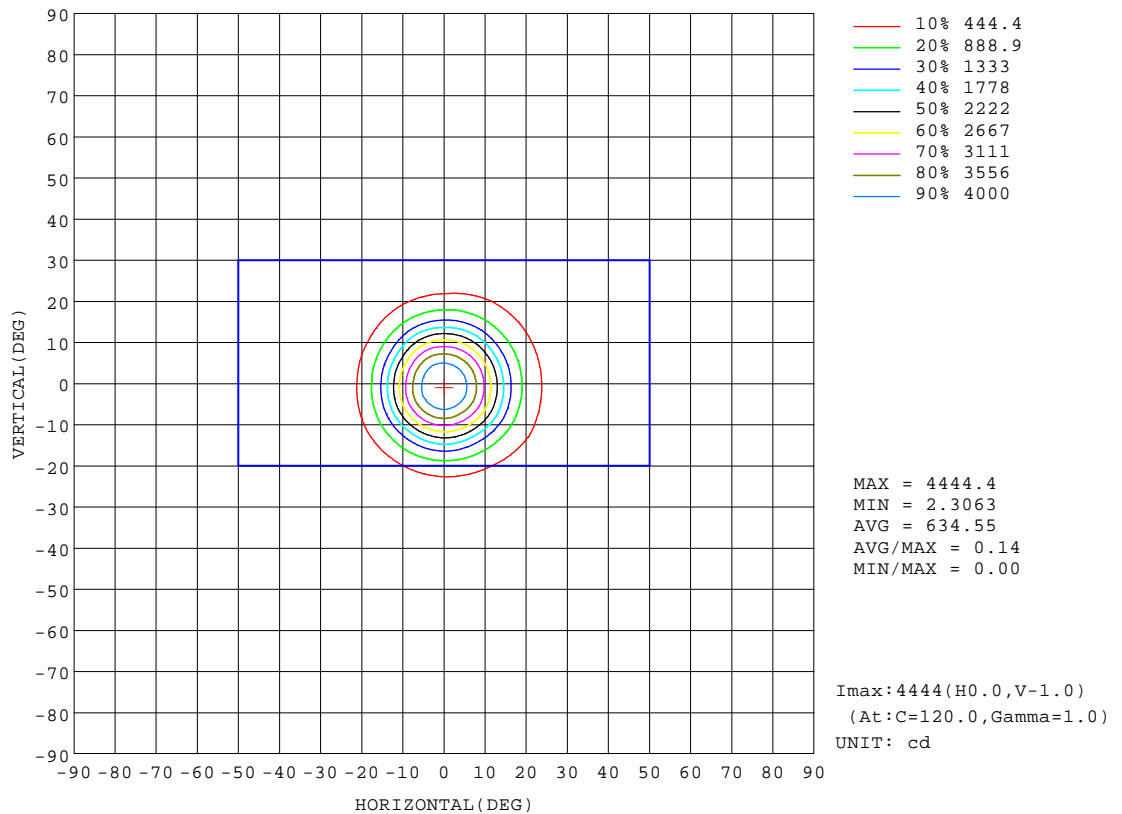


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G1000-A-83 Ra: 90  
LENSPM-1107A 24R  
DRIVER: LSC20W350LRP 350mA

30minutes warm-up

## AAI Figure

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz Lamp Flux:1490.39x1 lm		
NAME: 2115.115	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2502210104
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

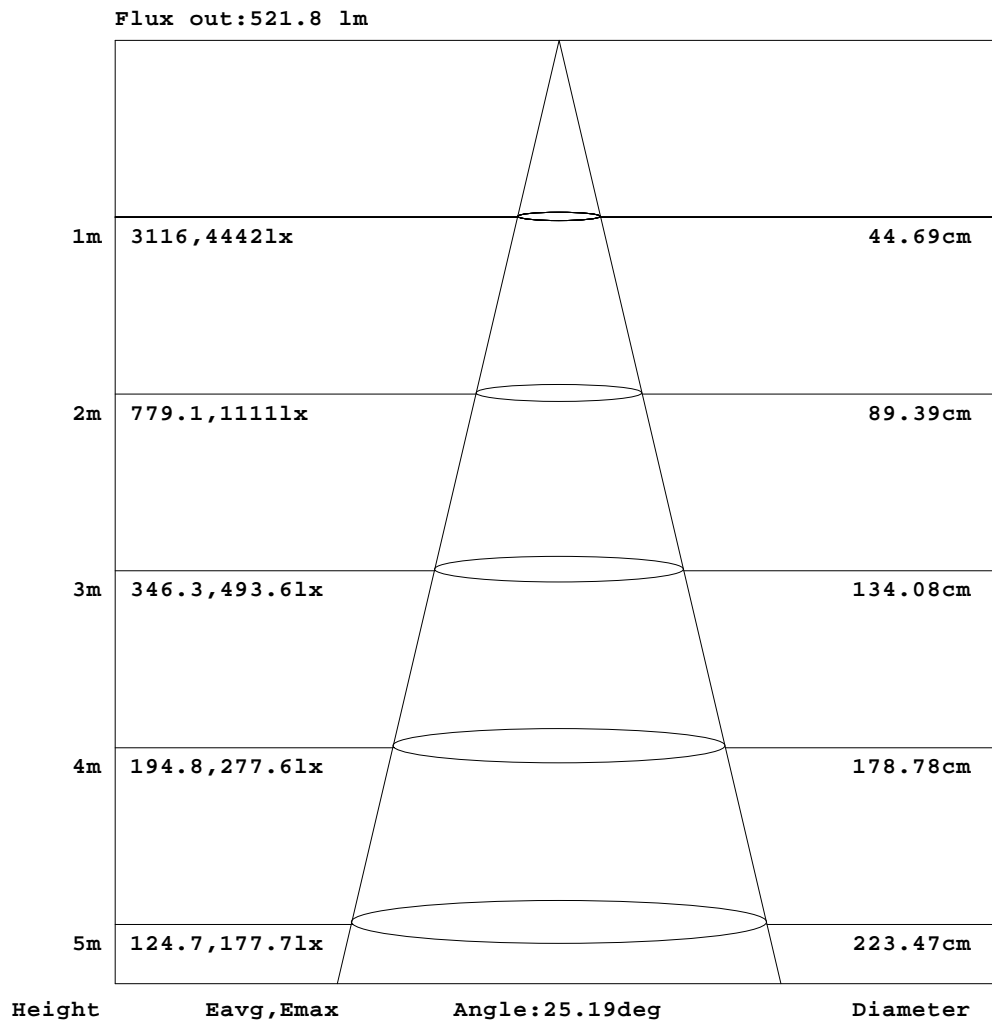

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G1000-A-83 Ra: 90  
LENSPM-1107A 24R  
DRIVER: LSC20W350LRP 350mA

30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz Lamp Flux:1490.39x1 lm		
NAME: 2115.115	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2502210104
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

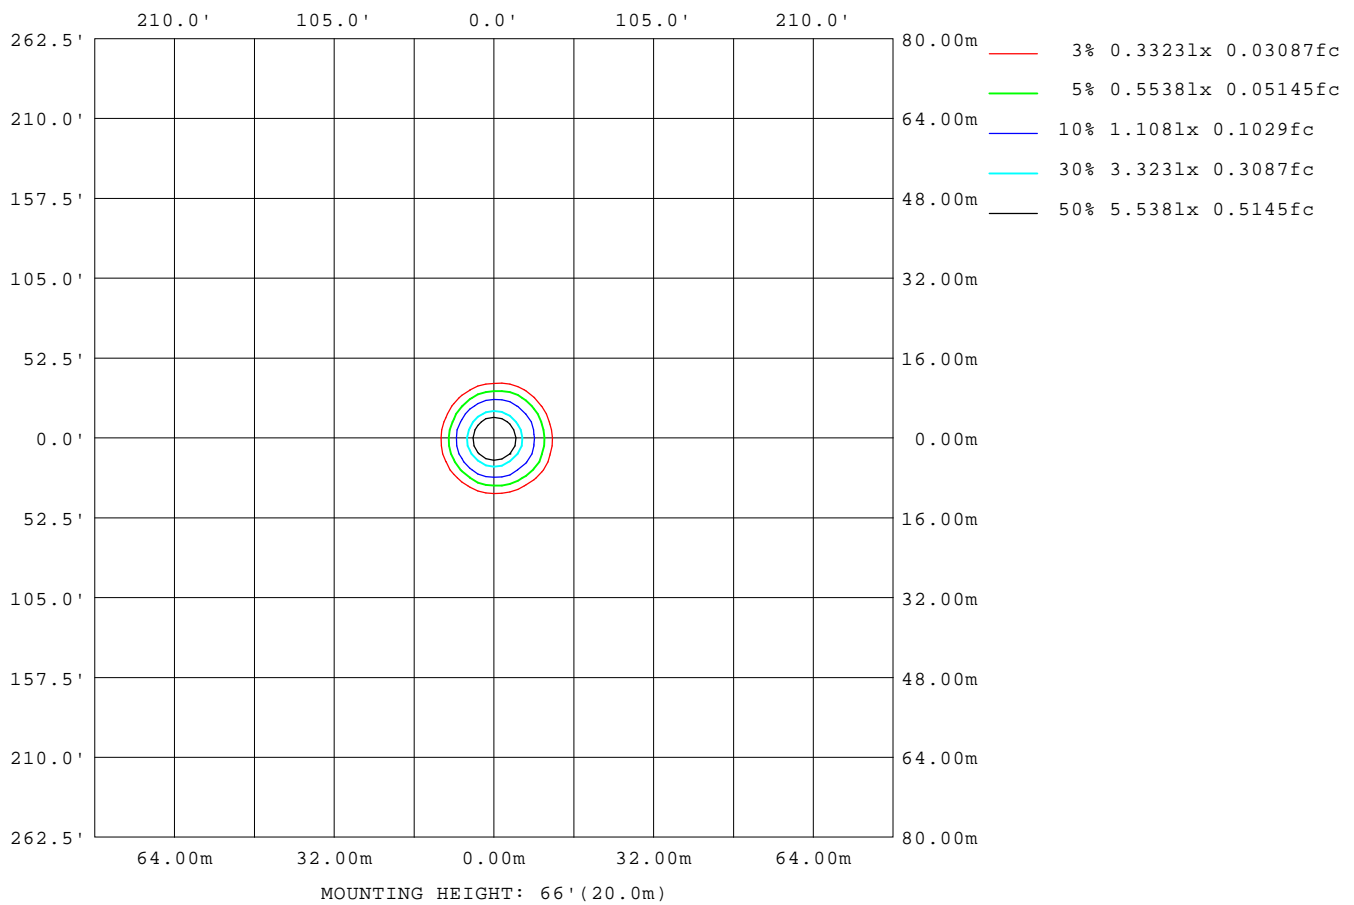

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA  
30minutes warm-up

## LED Avg.L Report

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz Lamp Flux:1490.39x1 lm		
NAME: 2115.115	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2502210104
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	372
L_0~180(75)av	41
L_0~180(85)av	108
L_90~270(65)av	363
L_90~270(75)av	36
L_90~270(85)av	83
L_45(65)av	363
L_45(75)av	26
L_45(85)av	36

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA  
30minutes warm-up

## Planar Illuminance Curve

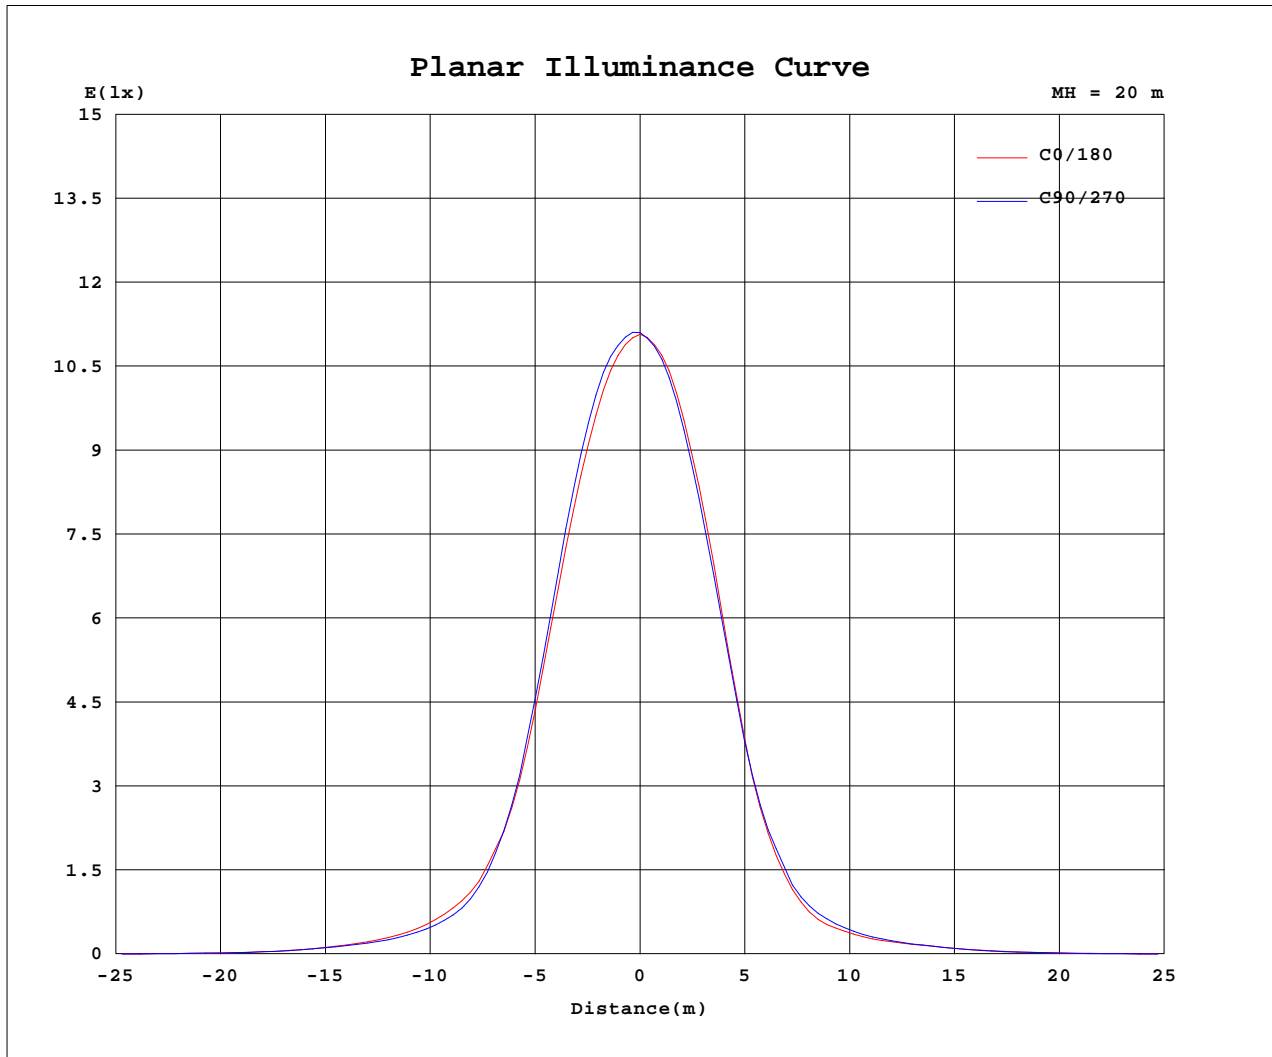

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2025-2-21

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRE-30G1000-A-83 Ra:90  
 LENS: PM-1107A 24R  
 DRIVER: LSC20W350LRP 350mA

30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.24V I:0.0740A P:14.493W PF:0.8840 Freq:49.99Hz Lamp Flux:1490.39x1 lm		
NAME: 2115.115	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2502210104
MFR.: RISE	SUR.: 0.002826m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	4437	4437	4437	4437	4437	4437	4437	4437	4437	4437	4437	4437						
5	4081	4147	4168	4199	4170	4137	4060	4032	4023	3990	3990	4030						
10	3044	3164	3154	3180	3138	3059	2912	2824	2853	2823	2874	2954						
15	1646	1767	1682	1724	1619	1549	1405	1345	1412	1415	1489	1538						
20	764	783	736	707	689	626	557	542	581	595	671	727						
25	383	402	343	323	293	276	250	253	275	291	343	365						
30	209	223	190	180	168	162	151	150	158	166	193	199						
35	118	127	113	111	108	105	101	99.1	100	101	109	112						
40	56.5	61.2	55.4	55.6	55.4	53.3	51.5	49.2	49.4	48.9	52.7	53.0						
45	23.3	25.6	23.9	24.7	24.8	24.2	23.8	22.4	22.2	21.0	22.4	21.7						
50	7.64	6.76	7.31	6.81	8.43	6.61	6.16	7.08	5.59	6.59	6.11	7.07						
55	3.34	3.34	3.08	3.03	2.84	2.74	2.66	2.59	2.63	2.76	3.09	3.22						
60	1.70	1.84	1.69	1.70	1.59	1.55	1.52	1.43	1.37	1.35	1.42	1.51						
65	0.46	0.52	0.48	0.52	0.49	0.47	0.42	0.36	0.35	0.34	0.39	0.43						
70	0.04	0.04	0.04	0.05	0.04	0.04	0.03	0.03	0.02	0.03	0.02	0.03						
75	0.03	0.02	0.02	0.03	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02						
80	0.03	0.02	0.02	0.02	0.01	0.01	0.02	0.01	0.01	0.02	0.01	0.01						
85	0.03	0.01	0.01	0.02	0.01	0.01	0.02	0.01	0.01	0.02	0.01	0.01						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-2-21

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G1000-A-83 Ra:90  
LENSPM-1107A 24R  
DRIVER:LSC20W350LRP 350mA

30minutes warm-up