




ARCH-100-STLWA



## Product specification

## INTERIOR RECESSED WALL LIGHT

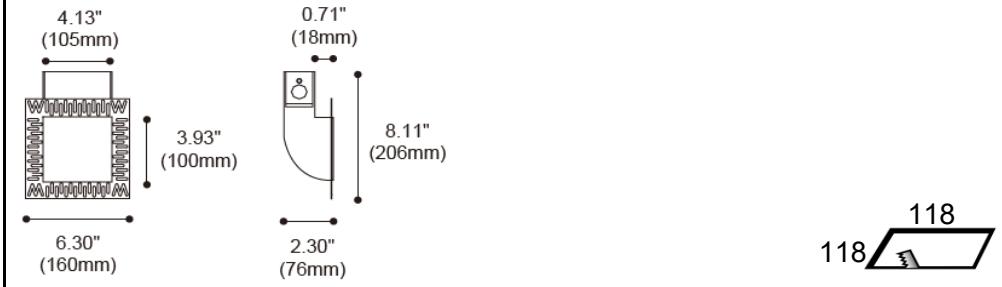

## Technical Specification

Article number	2115.123		
LED Consumption	7W		
Fixture Consumption	-		
Current / Voltage	350mA / 17.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen *1	618lm	656lm	716lm
Delivered Lumen	-	-	-
Beam Angle available	Ceiling / Floor Wash		
<b>Driver Technical Specification (Remoted)</b>			
Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Heat sink	aluminum
	IEC 62031	Trim	steel
Insulation	CLASS III	Color available	white
Protection	IP20		
Tilt / Rotate	-		
Operating temperature	0~35°C		
Average Failure Time	L80(11k)>61000(h)		

## Accessories

## Photometric

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.