




BROWNIE 40-S1



## Product specification

## SYSTEM LIGHTS

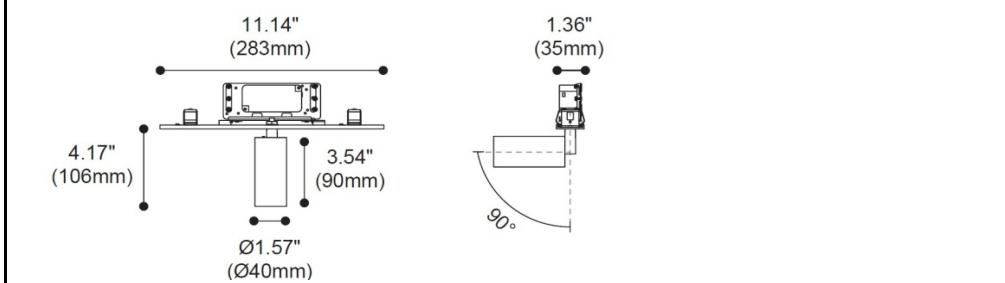

## Technical Specification

Article number	2117.405-V		
LED Consumption	6W		
Fixture Consumption			
Current / Voltage	350mA / 18Vdc		
CRI	90+		
CCT	3000K		
LED Lumen <sup>1</sup>	567lm		
Delivered Lumen			
Beam Angle available	20°/25°/36°		
Driver Technical Specification (Remoted)			
Driver Brand	YG	Driver Model	LBS12W-36-C0350-RD
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	350mA / 18-36Vdc
Dimming / Flicker	0/1~10V/Free	Certification	UL/CE
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	PC
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black / copper

## Accessories

## Photometric

## Remarks



<sup>1</sup>1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.