




BROWNIE 40-G



Product specification

SYSTEM LIGHTS

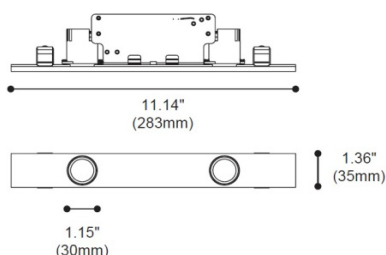

Technical Specification

| | |
|-------------------------|---------------|
| Article number | 2117.411-V-AM |
| LED Consumption | 15W |
| Fixture Consumption | |
| Current / Voltage | 600mA / 18Vdc |
| CRI | 90+ |
| CCT | 3000K |
| LED Lumen ^{*1} | 768lm |
| Delivered Lumen | |
| Beam Angle available | 25°/40°/50° |

Driver Technical Specification (Remoted)

| | | | |
|---------------------------------|----------------------|--------------------------|-----------------|
| Driver Brand | EUCHIPS | Driver Model | PUP20A-1WMC |
| Input voltage / Frequency range | 120-277Vac / 50/60Hz | Output Current / Voltage | 600mA / 9-33Vdc |
| Dimming / Flicker | 0/1~10V/Free | Certification | UL/CE |
| Power Factor | >0.9 | Warranty | 5years |

Technical character

| | | | |
|-----------------------|--------------------|-------------------------|-------------------|
| Products Standard | UL-1598 | Luminaire | extruded aluminum |
| | CSA C22.2#250.0 | Trim | - |
| Insulation | CLASS II | Optics | |
| Protection | IP20 | Heat sink | ADC12 |
| Tilt / Rotate | | Fixture color available | white / black |
| Operating temperature | 0~35°C | Baffle | PC |
| Average Failure Time | L70(6k) >36000 (h) | Baffle Color available | white / black |

Accessories

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.