




BROWNIE 40-G



Product specification

SYSTEM LIGHTS

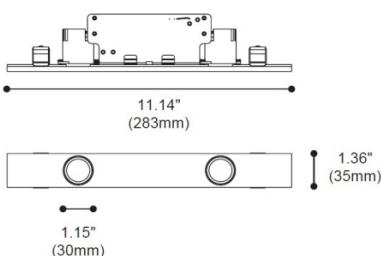

Technical Specification

Article number	2117.411-V
LED Consumption	5W*2
Fixture Consumption	
Current / Voltage	550mA / 18Vdc
CRI	90+
CCT	3000K
LED Lumen ^{*1}	768lm
Delivered Lumen	
Beam Angle available	25°/40°/50°

Driver Technical Specification (Remoted)

Driver Brand	YG	Driver Model	LBS20W-28-C0600-RD
Input voltage / Freqency range	120-277Vac / 50/60Hz	Output Current / Voltage	600mA / 9-33Vdc
Dimming / Flicker	0/1~10V/Free	Certification	UL/CE
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	
Protection	IP20	Heat sink	ADC12
Tilt / Rotate		Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black

Accessories

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.