




## BROWNIE 60-G

## Product specification



## SYSTEM LIGHTS

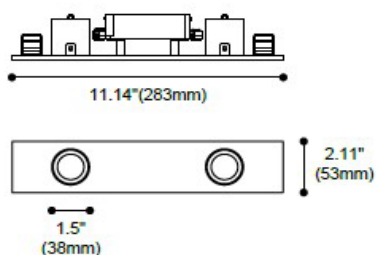

## Technical Specification

Article number	2117.426-V		
LED Consumption	5W*2		
Fixture Consumption			
Current / Voltage	550mA / 18Vdc		
CRI	90+		
CCT	3000K		
LED Lumen *1	948lm		
Delivered Lumen			
Beam Angle available	18°/25°/35°		
Driver Technical Specification (Remoted)			
Driver Brand	YG	Driver Model	LBS20W-28-C0600-RD
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	600mA / 9-33Vdc
Dimming / Flicker	0/1~10V/Free	Certification	UL/CE
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	PC
Protection	IP20	Heat sink	ADC12
Tilt / Rotate		Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black

## Accessories

## Photometric

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.