




BROWNIE 60-PT Type



Product specification

SYSTEM LIGHTS

T Type

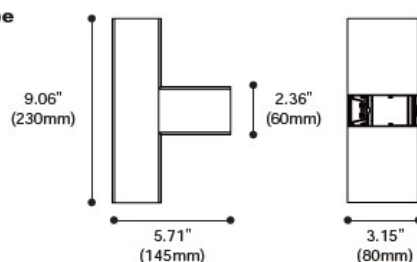

Technical Specification

| | | | |
|--|----------------------|--------------------------|-----------------|
| Article number | 2117.431-V-AM | | |
| LED Consumption | 12W | | |
| Fixture Consumption | | | |
| Current / Voltage | 260mA /36Vdc | | |
| CRI | 90+ | | |
| CCT | 3000K | | |
| LED Lumen ^{*1} | 599lm | | |
| Delivered Lumen | | | |
| Beam Angle available | 100° | | |
| Driver Technical Specification (Remoted) | | | |
| Driver Brand | EUCHIPS | Driver Model | PUP10A-1WMC |
| Input voltage / Frequency range | 120-277Vac / 50/60Hz | Output Current / Voltage | 260mA / 9-38Vdc |
| Dimming / Flicker | 0/1~10V/Free | Certification | UL/CE |
| Power Factor | >0.9 | Warranty | 5years |

| Technical character | | Materials | |
|-----------------------|--------------------|-------------------------|-------------------|
| Products Standard | UL 1598 | Luminaire | extruded aluminum |
| | CSA C22.2#250.0 | Trim | - |
| Insulation | CLASS II | Optics | |
| Protection | IP20 | Heat sink | extruded aluminum |
| Tilt / Rotate | | Fixture color available | white / black |
| Operating temperature | 0~35°C | Baffle | PC |
| Average Failure Time | L70(6k) >36000 (h) | Baffle Color available | |

Accessories

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.