




BROWNIE 60-S2-2

Product specification



SYSTEM LIGHTS

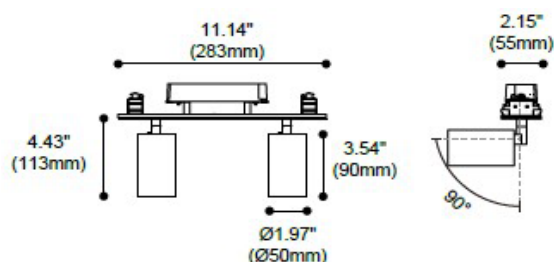

Technical Specification

Article number	2117.434-V-AM
LED Consumption	30W
Fixture Consumption	
Current / Voltage	700mA /36Vdc
CRI	90+
CCT	3000K
LED Lumen ^{*1}	2376lm
Delivered Lumen	
Beam Angle available	20°/30°/40°
Driver Technical Specification (Remoted)	
Driver Brand	ERP
Driver Model	PSB30W-0700-42
Input voltage / Frequency range	120-277Vac / 50/60Hz
Output Current / Voltage	700mA / 27-42Vdc
Dimming / Flicker	0/1~10V/Free
Certification	UL/CE
Power Factor	>0.9
Warranty	5years

Technical character		Materials	
Products Standard	UL 1598	Luminaire	extruded aluminum
	CSA C22.2#250.0	Trim	-
Insulation	CLASS II	Optics	PC
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black / copper

Accessories

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.