




BROWNIE 40-C5



## Product specification

## SYSTEM LIGHTS

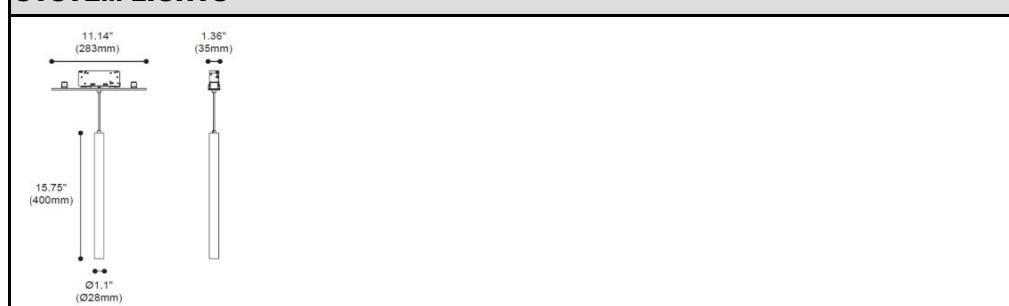

## Technical Specification

Article number	2117.450-V
LED Consumption	6.4W
<b>Fixture Consumption</b>	
Current / Voltage	350mA /18Vdc
CRI	90+
CCT	3000K
LED Lumen <sup>*1</sup>	557lm
<b>Delivered Lumen</b>	
Beam Angle available	20°/25°/35°

## Driver Technical Specification (Remoted)

Driver Brand	YG	Driver Model	LBS12W-36-C0350-RD
Input voltage / Freqency range	120-277Vac / 50/60Hz	Output Current / Voltage	350mA / 18-36Vdc
Dimming / Flicker	0/1~10V/Free	Certification	UL/CE
Power Factor	>0.9	Warranty	5years

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	PC
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate		Fixture color available	white / black
Operating temperature	0~35°C	Baffle	
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black / copper

## Accessories

## Photometric

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.