




BROWNIE 40-KA12 type



## Product specification

## SYSTEM LIGHTS

## KA12

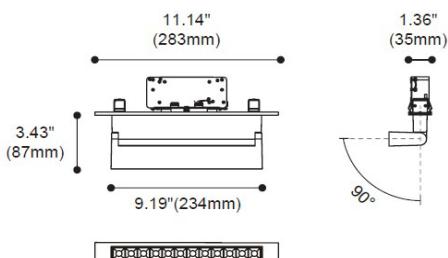

## Technical Specification

Article number 2117.451-12-V

LED Consumption 11W

Fixture Consumption

Current / Voltage 300mA / 36Vdc

CRI 90+

CCT 3000K

LED Lumen \*1 591lm

Delivered Lumen

Beam Angle available 30°

## Driver Technical Specification (Remoted)

Driver Brand	YG	Driver Model	LBS12W-43-C0300-RD
Input voltage / Freqency range	120-277Vac / 50/60Hz	Output Current / Voltage	300mA / 22-43Vdc
Dimming / Flicker	0/1~10V/Free	Certification	UL/CE
Power Factor	>0.9	Warranty	5years

## Technical character

## Materials

Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Trim	-
Insulation	CLASS II	Optics	
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	0~90°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black

## Accessories

## Photometric

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.