




BROWNIE 60-KA6 type



Product specification

SYSTEM LIGHTS

KA6

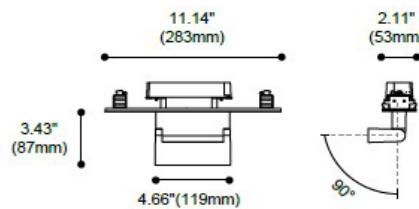

Technical Specification

Article number 2117.452-6-V-AM

LED Consumption 8W

Fixture Consumption

Current / Voltage 150mA / 36Vdc

CRI 90+

CCT 3000K

LED Lumen *1 266lm

Delivered Lumen

Beam Angle available 30°

Driver Technical Specification (Remoted)

Driver Brand	EUCHIPS	Driver Model	PUP10A-1WMC
Input voltage / Freqency range	120-277Vac / 50/60Hz	Output Current / Voltage	150mA / 9-42Vdc
Dimming / Flicker	0/1~10V/Free	Certification	UL/CE
Power Factor	>0.9	Warranty	5years

Technical character

Materials

Products Standard	UL-1598	Luminaire	extruded aluminum
	CSA C22.2#250.0	Trim	-
Insulation	CLASS II	Optics	
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	0~90°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	PC
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black / chrome / gold

Accessories

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.