




BROWNIE 60-S3-2



Product specification

SYSTEM LIGHTS

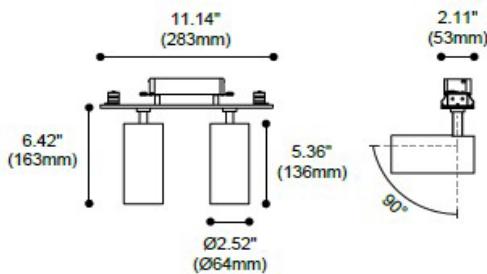

Technical Specification

Article number 2117.497-V-AM

LED Consumption 50W

Fixture Consumption

Current / Voltage 1400mA /36Vdc

CRI 90+

CCT 3000K

LED Lumen *1 2829lm x2

Delivered Lumen

Beam Angle available 17°/25°/35°

Driver Technical Specification (Remoted)

Driver Brand	ERP	Driver Model	PSB50W-1400-34
Input voltage / Freqency range	120-277Vac / 50/60Hz	Output Current / Voltage	1400mA /20-34Vdc
Dimming / Flicker	0/1~10V/Free	Certification	UL/CE
Power Factor	>0.9	Warranty	5years

Technical character

Materials

Products Standard	UL 1598	Luminaire	extruded aluminum
	CSA C22.2#250.0	Trim	-
Insulation	CLASS II	Optics	PC
Protection	IP20	Heat sink	extruded aluminum
Tilt / Rotate	0~90° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	
Average Failure Time	L70(6k) >36000 (h)	Baffle Color available	white / black /copper

Accessories

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.