




## BROWNIE 60-S3-2



## Product specification

## SYSTEM LIGHTS

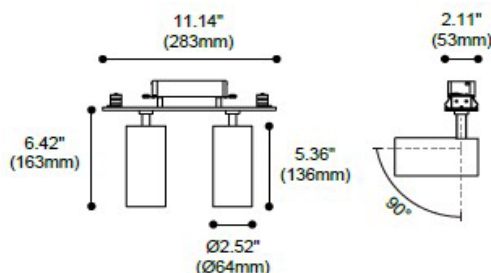

## Technical Specification

|                                          |                      |
|------------------------------------------|----------------------|
| Article number                           | 2117.497-V           |
| LED Consumption                          | 50W                  |
| Fixture Consumption                      |                      |
| Current / Voltage                        | 1400mA /36Vdc        |
| CRI                                      | 90+                  |
| CCT                                      | 3000K                |
| LED Lumen <sup>*1</sup>                  | 2829lm x2            |
| Delivered Lumen                          |                      |
| Beam Angle available                     | 17°/25°/35°          |
| Driver Technical Specification (Remoted) |                      |
| Driver Brand                             | ERP                  |
| Driver Model                             | PSB50W-1400-34       |
| Input voltage / Frequency range          | 120-277Vac / 50/60Hz |
| Output Current / Voltage                 | 1400mA /20-34Vdc     |
| Dimming / Flicker                        | 0/1~10V/Free         |
| Certification                            | UL/CE                |
| Power Factor                             | >0.9                 |
| Warranty                                 | 5years               |

| Technical character   |                    | Materials               |                       |
|-----------------------|--------------------|-------------------------|-----------------------|
| Products Standard     | IEC 60598-1        | Luminaire               | extruded aluminum     |
|                       | IEC 62031          | Trim                    | -                     |
| Insulation            | CLASS II           | Optics                  | PC                    |
| Protection            | IP20               | Heat sink               | extruded aluminum     |
| Tilt / Rotate         | 0~90° / 0~355°     | Fixture color available | white / black         |
| Operating temperature | 0~35°C             | Baffle                  |                       |
| Average Failure Time  | L70(6k) >36000 (h) | Baffle Color available  | white / black /copper |

## Accessories

## Photometric

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.