





EPIC-65-STA

Product specification



INTERIOR RECESSED DOWNLIGHTS

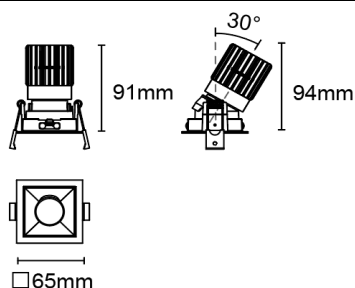

Technical Specification

Article number	2118.104-ACOT-69-WCW		
LED Consumption	10W		
Fixture Consumption	11W		
Current / Voltage	250mA / 36.5Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	872lm	913lm	981lm
Delivered Lumen	-	755lm	-
Beam Angle available	20°/40°/55°		

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character


Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP44
Tilt / Rotate	0~30° / Non
Operating temperature	0~35°C
Average Failure Time	L70(6k) >33300(h)

Materials

Luminaire	Aluminum die cast
Trim	Aluminum die cast
Optics	PMMA Lens
Heat sink	Forged aluminum
Fixture color available	white / black
Baffle	Aluminum die cast
Baffle Color available	white / black

Accessories

Photometric

ACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glassACOT-107
Suction cup

Remarks





*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.



20°

Adjustable

2118.104-ACOT-68
2118.204A-ACOT-68

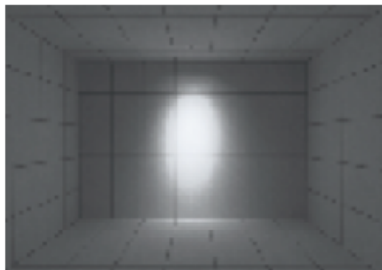



H(m)	D(m)	E(lx)
20°		
1.0	0.35	4619
2.0	0.69	1155
3.0	1.04	513
4.0	1.38	288
5.0	1.73	184



40°

Adjustable

2118.104-ACOT-68
2118.204A-ACOT-68

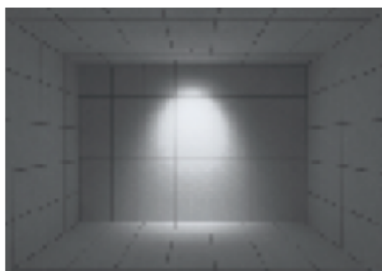



H(m)	D(m)	E(lx)
40°		
1.0	0.76	1521
2.0	1.52	380
3.0	2.27	169
4.0	3.03	95
5.0	3.79	60



55°

Adjustable

2118.104-ACOT-68
2118.204A-ACOT-68

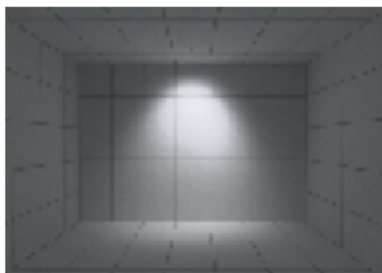

H(m)	D(m)	E(lx)
55°		
1.0	0.95	1021
2.0	1.90	255
3.0	2.85	113
4.0	3.81	63
5.0	4.76	40