




EPIC-85-RTF

Product specification



INTERIOR RECESSED DOWNLIGHTS



80

Technical Specification

Article number	2118.106-ACOT-70		
LED Consumption	12W		
Fixture Consumption	15W		
Current / Voltage	350mA / 33.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1389lm	1446lm	1469lm
Delivered Lumen	-	1265lm	-
Beam Angle available	30°/50°/60°		

Driver Technical Specification (Remoted)

Driver Brand	PHILIPS	Driver Model	929002808806
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	350mA / 32-40Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CCC/CE/CB/RCM
Power Factor	>0.9	Warranty	2 years

Technical character


Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	Non / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(9k)>50000(h)	Baffle Color available	white / black

Materials

Accessories



Photometric

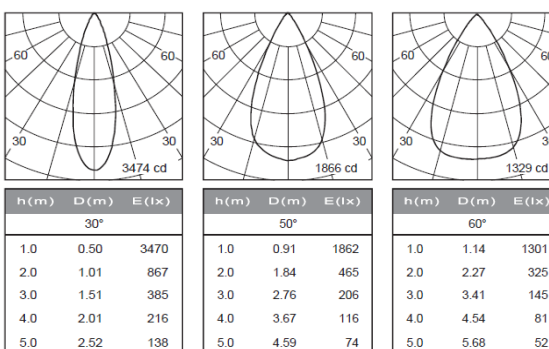

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.