




EPIC-85-RTF-15



## Product specification

## INTERIOR RECESSED DOWNLIGHTS

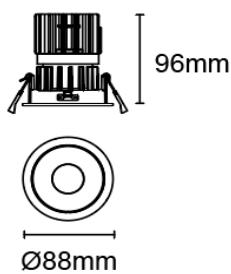

80

## Technical Specification

Article number	2118.106-ACOT-70A
LED Consumption	10W
Fixture Consumption	-
Current / Voltage	800mA / 12Vdc
CRI	90+
CCT	3000K
LED Lumen <sup>*1</sup>	784lm
Delivered Lumen	-
Beam Angle available	15°

## Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	Non / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(12k)>72600(h)	Baffle Color available	white / black

## Accessories

## Photometric

ACSG-4 Striped glass	ACHO-5 Honeycomb louver	ACDS-4 Diffusion sheet	ACWG-5 Woven glass
ACOT-108 Suction cup	ACOT-103 MR16 Accessory kits	ACOT-104 GU10 Accessory kits	PK-0250 MR16&GU10 Accessory

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.





13°

Fixed UGR&lt;10

2118.106-ACOT-70A

2118.206F-ACOT-70A

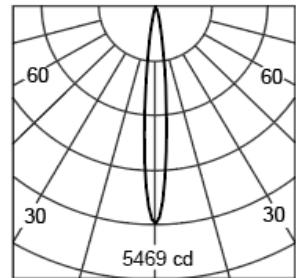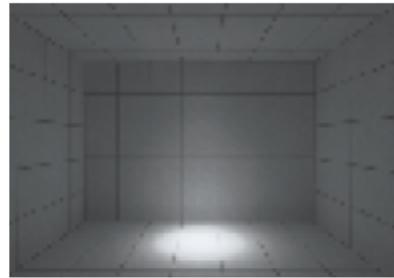

H(m)	D(m)	E(lx)
13°		
1.0	0.23	5576
2.0	0.46	1394
3.0	0.70	619
4.0	0.93	348
5.0	1.16	223