




EPIC-85-RTA-15



Product specification

INTERIOR RECESSED DOWNLIGHTS

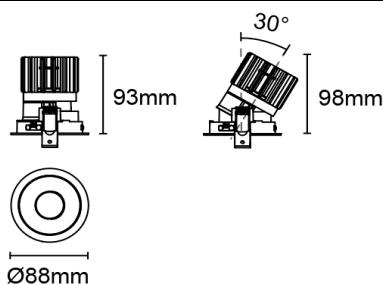

80

Technical Specification


Article number	2118.107-ACOT-70A
LED Consumption	10W
Fixture Consumption	-
Current / Voltage	800mA / 12Vdc
CRI	90+
CCT	3000K
LED Lumen ^{*1}	784lm
Delivered Lumen	-
Beam Angle available	10°

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	0~35° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(12k)>72600(h)	Baffle Color available	white / black

Accessories

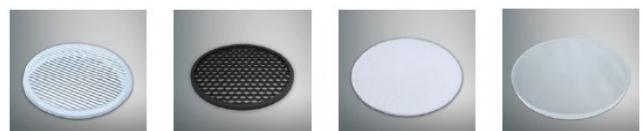ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glass

Photometric

ACOT-108
Suction cupACOT-103
MR16 Accessory kitsACOT-104
GU10 Accessory kitsPK-0250
MR16&GU10 Accessory

Remarks



1-10V

*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.