

## Luminaire Photograph



Light Output Ratio:	54.3%	
Luminaire Power:	14.95 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.65	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXR-V-DR-1830G-0600-B-23 Ra: 90  
LENS: PM-1101 15R  
DRIVER: PUP20A-1WMC 350mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

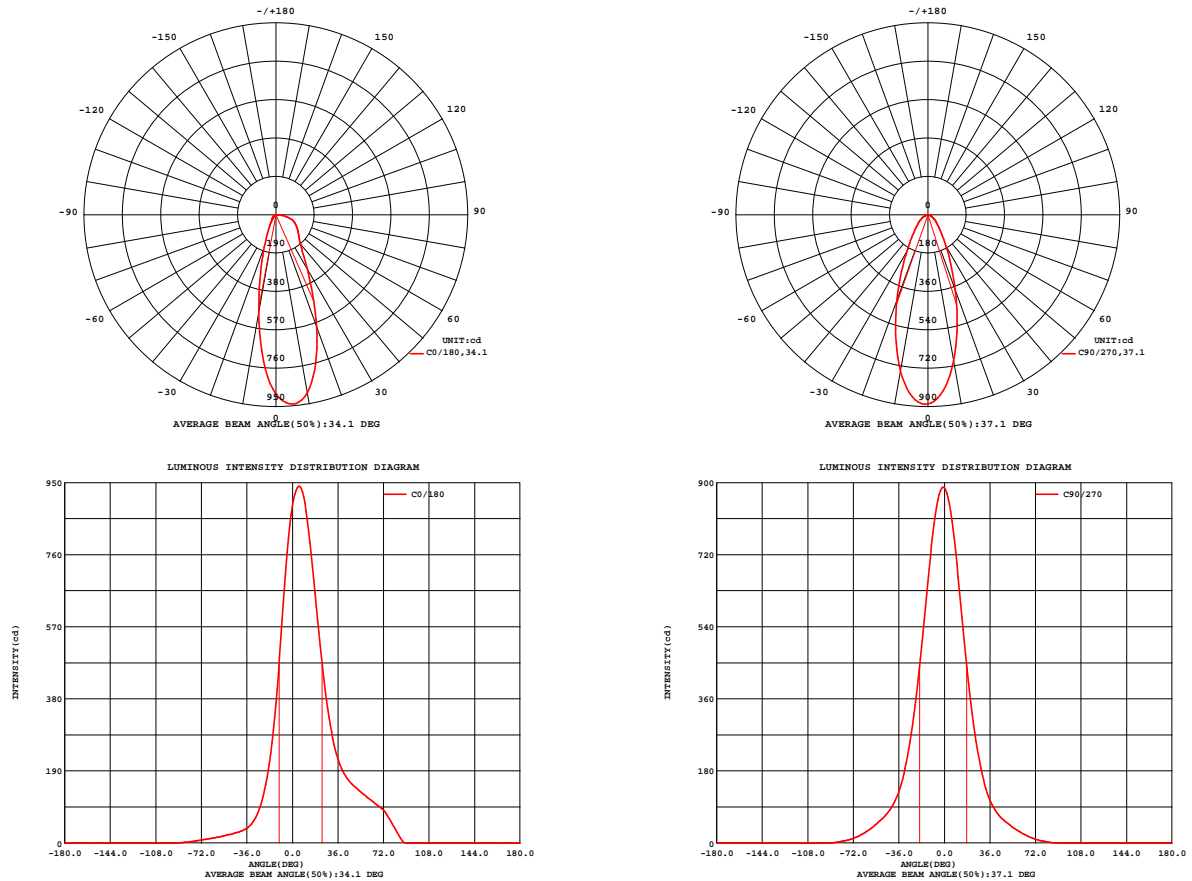


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXR-V-DR-1830G-0600-B-23 Ra: 90  
LENS: PM-1101 15R  
DRIVER: PUP20A-1WMC 350mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm		
NAME: 2118.127-LEA-14-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2508270591
MFR.: RISE	SUR.: 0.00119025m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 41.35 lm/W			
MODEL	Bridgelux	I <sub>max</sub> (cd)	940.3	S/MH(C0/180)	0.37
NOMINAL POWER(W)	15	LOR(%)	54.3	S/MH(C90/270)	0.63
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	618.20	UP,DN(C0-180)	0.0,29.0
NOMINAL FLUX(lm)	1138.85	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,25.3
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	down(%)	54.3	CIBSE SHR MAX	0.65

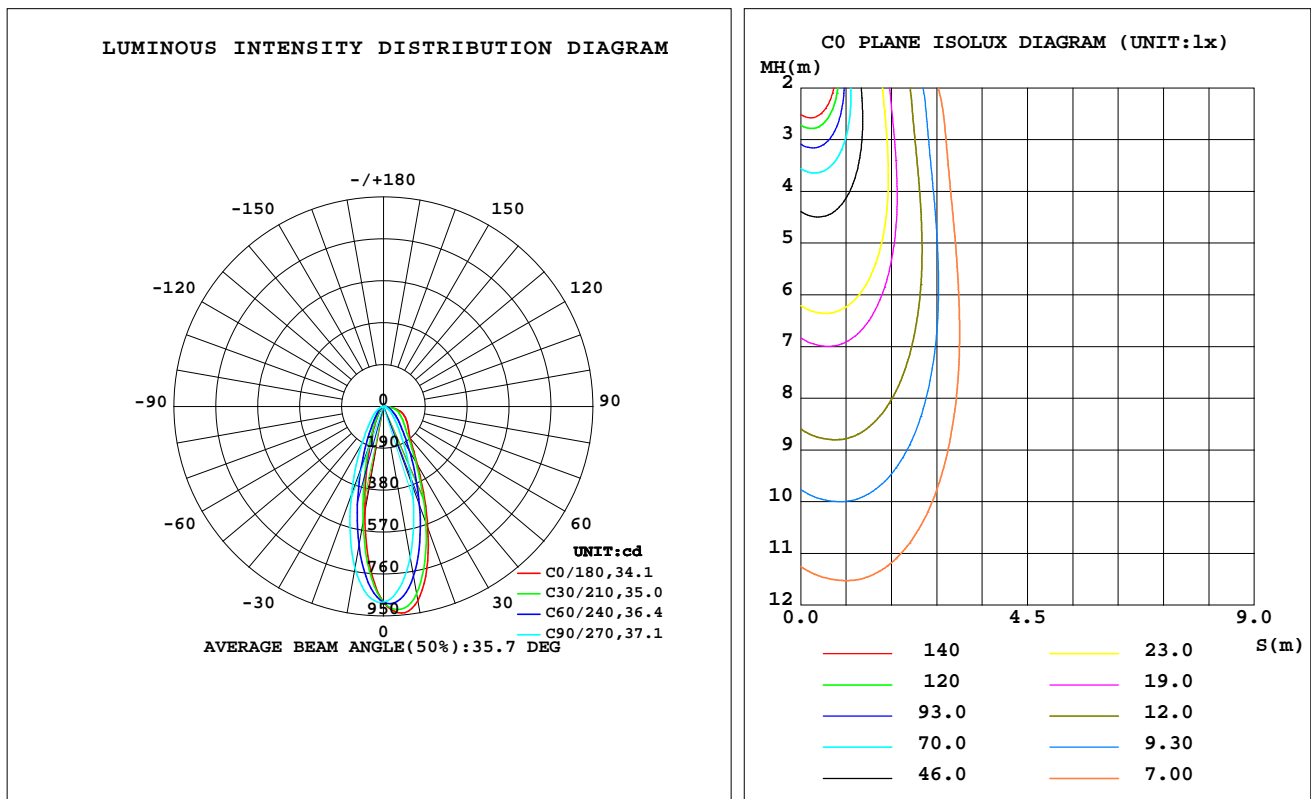

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	894.5	822.9	695.7	551.8	492.5	588.9	744.3	860.4	0- 10	75.66	75.66	12.2,6.64
20	588.9	520.9	376.7	221.4	171.8	251.4	426.9	560.3	10- 20	149.5	225.1	36.4,19.8
30	310.5	269.2	170.8	81.36	60.74	93.50	200.5	293.6	20- 30	124.4	349.5	56.5,30.7
40	189.4	150.2	83.35	38.96	31.94	42.62	98.34	165.5	30- 40	83.99	433.5	70.1,38.1
50	146.3	101.0	49.16	25.36	21.94	27.07	57.78	113.0	40- 50	62.73	496.2	80.3,43.6
60	118.7	70.28	27.34	15.87	14.61	16.97	31.92	81.31	50- 60	50.70	546.9	88.5,48
70	92.58	49.78	11.65	8.942	8.732	9.466	13.80	59.14	60- 70	38.37	585.3	94.7,51.4
80	45.13	26.42	3.614	3.049	3.768	3.885	4.833	32.03	70- 80	25.74	611.1	98.8,53.7
90	0	0	0	0	0	0	0	0	80- 90	7.154	618.2	100,54.3
100	0	0	0	0	0	0	0	0	90-100	0	618.2	100,54.3
110	0	0	0	0	0	0	0	0	100-110	0	618.2	100,54.3
120	0	0	0	0	0	0	0	0	110-120	0	618.2	100,54.3
130	0	0	0	0	0	0	0	0	120-130	0	618.2	100,54.3
140	0	0	0	0	0	0	0	0	130-140	0	618.2	100,54.3
150	0	0	0	0	0	0	0	0	140-150	0	618.2	100,54.3
160	0	0	0	0	0	0	0	0	150-160	0	618.2	100,54.3
170	0	0	0	0	0	0	0	0	160-170	0	618.2	100,54.3
180	0	0	0	0	0	0	0	0	170-180	0	618.2	100,54.3
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:zoe  
 Test Date:2025-8-27

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
 LENS:PM-1101 15R  
 DRIVER:PUP20A-1WMC 350mA  
 30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz  
Lamp Flux:1138.85x1 lm

NAME: 2118.127-LEA-14-DW

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2508270591

MFR.: RISE

SUR.: 0.00119025m2

Shielding Angle:

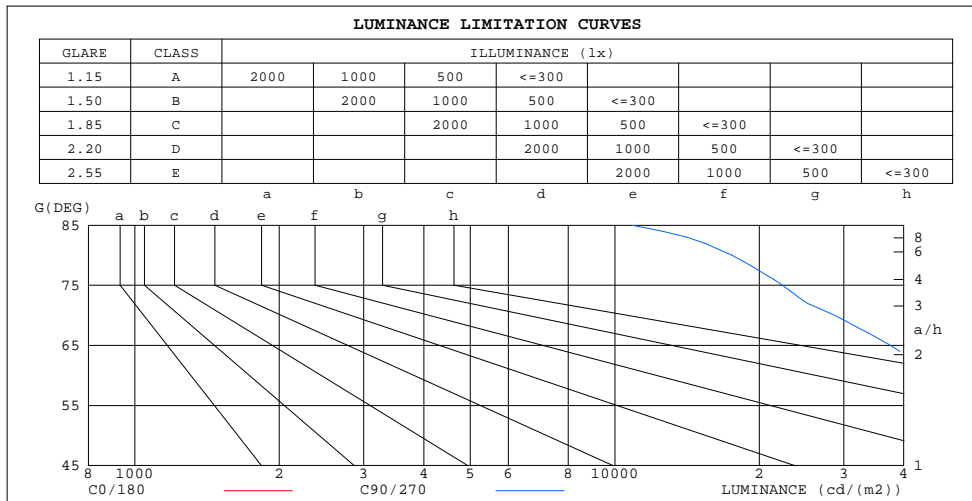

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	152494	10889
80	218271	17523
75	238515	22321
70	227323	28667
65	209043	37507
60	199462	46045
55	193588	54891
50	191212	64387
45	193764	74910


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm		
NAME: 2118.127-LEA-14-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2508270591
MFR.: RISE	SUR.: 0.00119025m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	.65	.65	.65	.63	.63	.63	.60	.60	.60	.58	.58	.58	.55	.55	.55	.54
1.0	.58	.57	.55	.57	.56	.54	.55	.54	.52	.53	.52	.51	.51	.50	.49	.48
2.0	.53	.50	.48	.52	.49	.47	.50	.48	.46	.48	.47	.45	.47	.45	.44	.43
3.0	.48	.45	.42	.48	.44	.42	.46	.43	.41	.45	.42	.41	.43	.42	.40	.39
4.0	.45	.41	.38	.44	.40	.38	.43	.40	.37	.42	.39	.37	.40	.38	.36	.35
5.0	.41	.37	.35	.41	.37	.35	.40	.37	.34	.39	.36	.34	.38	.35	.34	.33
6.0	.38	.35	.32	.38	.34	.32	.37	.34	.32	.36	.33	.31	.36	.33	.31	.30
7.0	.36	.32	.30	.36	.32	.30	.35	.32	.29	.34	.31	.29	.34	.31	.29	.28
8.0	.34	.30	.28	.34	.30	.28	.33	.30	.27	.32	.29	.27	.32	.29	.27	.26
9.0	.32	.28	.26	.32	.28	.26	.31	.28	.26	.31	.28	.26	.30	.28	.26	.25
10.0	.30	.27	.24	.30	.27	.24	.30	.26	.24	.29	.26	.24	.29	.26	.24	.23

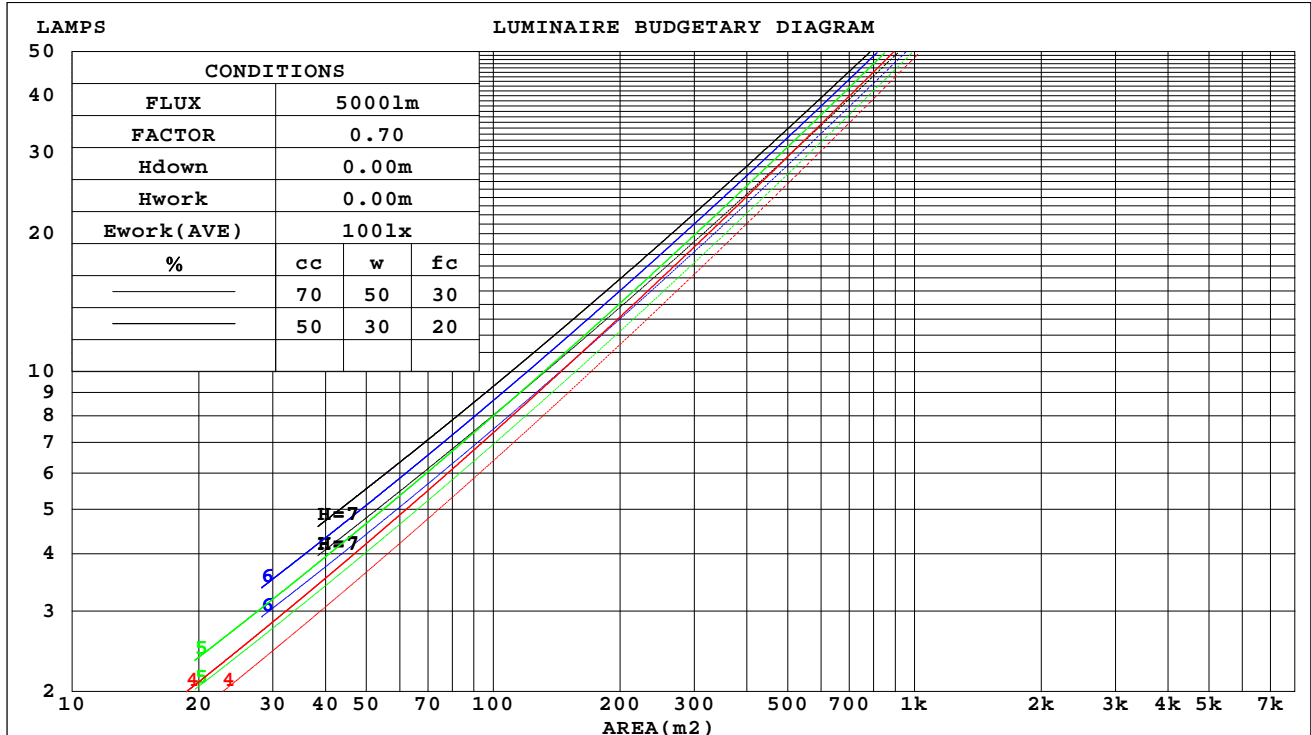

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up

### WEC AND CCEC

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm		
NAME: 2118.127-LEA-14-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2508270591
MFR.: RISE	SUR.: 0.00119025m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.129	.073	.023	.125	.072	.023	.118	.068	.022	.112	.065	.021	.106	.061	.020	
2.0	.121	.066	.020	.118	.065	.020	.112	.062	.019	.106	.060	.019	.101	.057	.018	
3.0	.112	.060	.018	.110	.059	.018	.104	.057	.017	.100	.055	.017	.095	.053	.016	
4.0	.104	.054	.016	.102	.053	.016	.097	.052	.015	.093	.050	.015	.089	.048	.015	
5.0	.097	.049	.014	.095	.049	.014	.091	.047	.014	.087	.046	.014	.084	.045	.013	
6.0	.091	.046	.013	.089	.045	.013	.085	.044	.013	.082	.043	.013	.079	.042	.012	
7.0	.085	.042	.012	.084	.042	.012	.080	.041	.012	.078	.040	.012	.075	.039	.011	
8.0	.080	.039	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	.071	.036	.011	
9.0	.076	.037	.010	.074	.036	.010	.072	.036	.010	.070	.035	.010	.067	.034	.010	
10.0	.072	.034	.010	.071	.034	.010	.068	.033	.009	.066	.033	.009	.064	.032	.009	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RcR	RcR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.103	.103	.103	.088	.088	.088	.060	.060	.060	.035	.035	.035	.011	.011	.011	
1.0	.095	.085	.076	.081	.073	.065	.056	.050	.045	.032	.029	.026	.010	.009	.009	
2.0	.089	.072	.058	.076	.062	.050	.052	.043	.035	.030	.025	.020	.010	.008	.007	
3.0	.083	.062	.045	.071	.053	.039	.049	.037	.027	.028	.022	.016	.009	.007	.005	
4.0	.078	.054	.036	.067	.047	.032	.046	.033	.022	.026	.019	.013	.009	.006	.004	
5.0	.073	.048	.030	.063	.042	.026	.043	.029	.018	.025	.017	.011	.008	.006	.004	
6.0	.069	.043	.025	.059	.037	.022	.041	.026	.015	.024	.015	.009	.008	.005	.003	
7.0	.065	.039	.021	.056	.034	.018	.039	.024	.013	.022	.014	.008	.007	.005	.003	
8.0	.061	.036	.018	.053	.031	.016	.037	.022	.011	.021	.013	.007	.007	.004	.002	
9.0	.058	.033	.016	.050	.029	.014	.035	.020	.010	.020	.012	.006	.007	.004	.002	
10.0	.056	.031	.014	.048	.027	.012	.033	.019	.009	.019	.011	.005	.006	.004	.002	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm										
NAME: 2118.127-LEA-14-DW					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2508270591		
MFR.: RISE					SUR.: 0.00119025m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	30.8	31.9	31.0	32.1	32.3	25.7	26.8	25.9	27.0	27.2
3H	33.0	34.1	33.3	34.3	34.5	26.2	27.3	26.5	27.5	27.7
4H	34.2	35.2	34.5	35.4	35.7	26.4	27.4	26.7	27.6	27.9
6H	35.0	36.0	35.3	36.2	36.5	26.5	27.4	26.8	27.7	28.0
8H	35.3	36.2	35.6	36.4	36.7	26.5	27.4	26.8	27.7	28.0
12H	35.4	36.3	35.7	36.5	36.8	26.5	27.4	26.8	27.6	27.9
4H 2H	31.0	32.0	31.3	32.3	32.5	27.2	28.2	27.4	28.4	28.6
3H	33.6	34.5	33.9	34.8	35.1	27.9	28.8	28.3	29.1	29.4
4H	34.9	35.8	35.3	36.1	36.4	28.3	29.1	28.6	29.4	29.7
6H	35.9	36.7	36.3	37.0	37.4	28.5	29.2	28.9	29.5	29.9
8H	36.3	36.9	36.7	37.3	37.7	28.5	29.2	28.9	29.5	29.9
12H	36.4	37.1	36.8	37.4	37.8	28.5	29.1	28.9	29.5	29.9
8H 4H	35.1	35.7	35.5	36.1	36.5	29.6	30.3	30.0	30.7	31.0
6H	36.3	36.8	36.7	37.2	37.6	30.0	30.6	30.4	31.0	31.4
8H	36.7	37.2	37.1	37.6	38.0	30.1	30.6	30.6	31.0	31.5
12H	36.9	37.4	37.4	37.8	38.3	30.2	30.6	30.6	31.0	31.5
12H 4H	35.0	35.7	35.4	36.0	36.4	29.9	30.5	30.3	30.9	31.3
6H	36.3	36.8	36.7	37.2	37.6	30.4	30.9	30.9	31.4	31.8
8H	36.7	37.1	37.2	37.6	38.1	30.6	31.0	31.1	31.5	32.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.1					+ 0.3 / - 0.4				
1.5H	+ 0.1 / - 0.1					+ 0.2 / - 0.4				
2.0H	+ 0.2 / - 0.3					+ 0.5 / - 0.7				

CIE Pub.117, 1139 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.5)  
Area: 0.00119025 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm		
NAME: 2118.127-LEA-14-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2508270591
MFR.: RISE	SUR.: 0.00119025m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	40	35	32	39	35	32	39	35	32	29
0.80	44	40	37	44	40	37	43	39	36	34
1.00	48	43	40	47	43	40	46	43	40	37
1.25	51	46	44	50	46	43	49	45	43	40
1.50	53	49	46	52	48	46	51	47	45	42
2.00	55	52	49	54	51	49	53	50	48	44
2.50	57	54	51	56	53	51	54	52	50	46
3.00	58	55	53	57	54	52	55	53	51	47
4.00	60	57	56	59	56	55	56	55	53	49
5.00	61	59	57	59	58	56	57	56	55	50
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm		
NAME: 2118.127-LEA-14-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2508270591
MFR.: RISE	SUR.: 0.00119025m2	Shielding Angle:

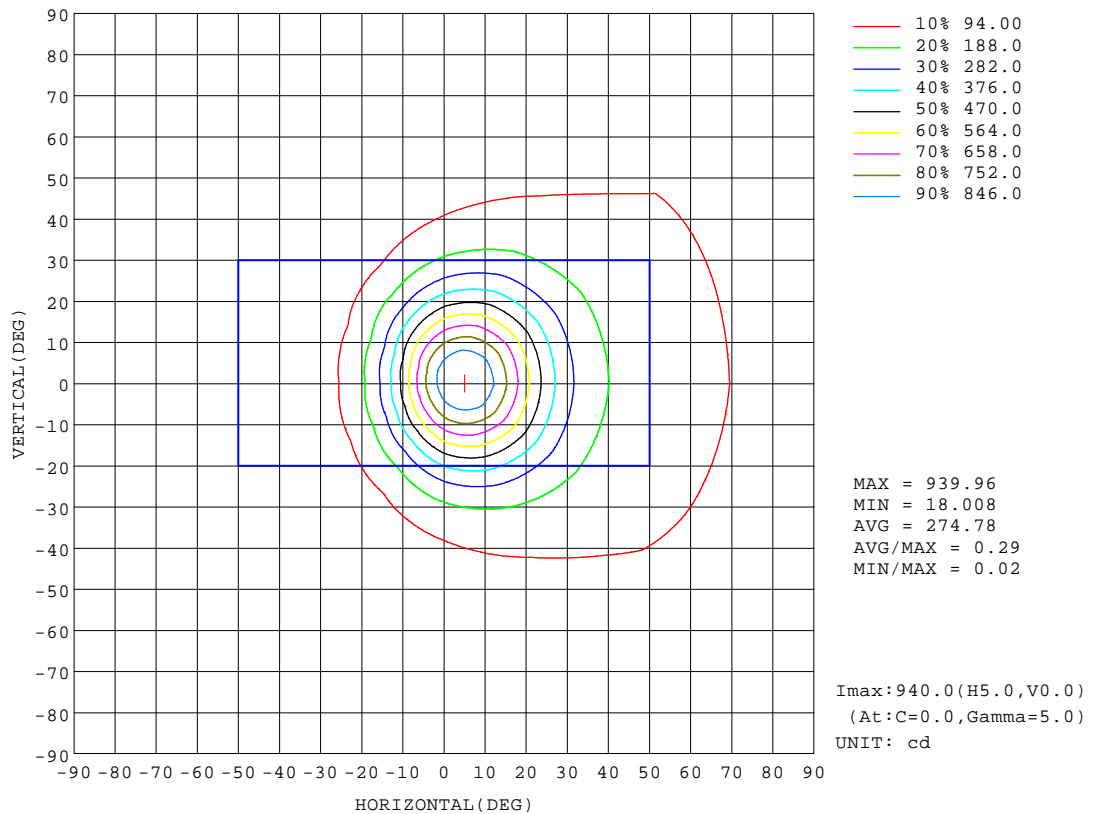


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up

## AAI Figure

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm		
NAME: 2118.127-LEA-14-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2508270591
MFR.: RISE	SUR.: 0.00119025m2	Shielding Angle:

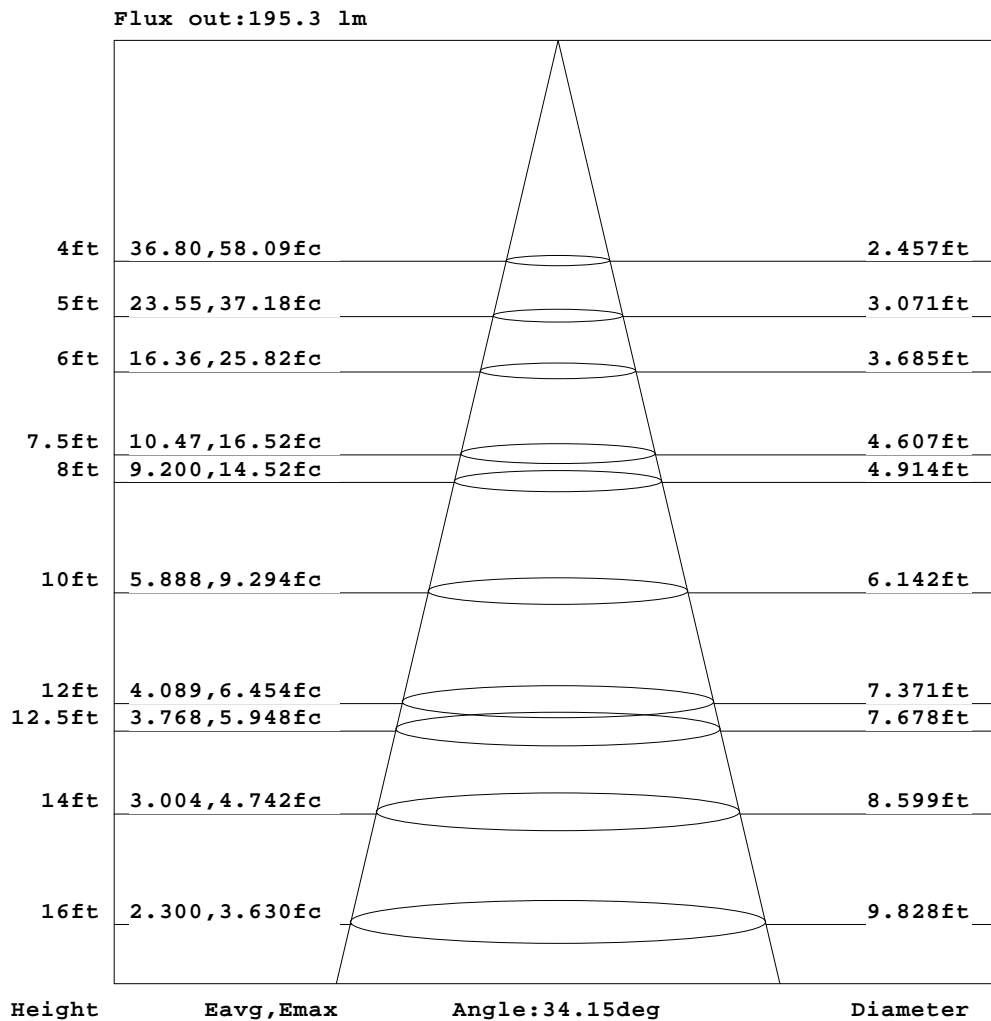


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: zoe  
Test Date: 2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXR-V-DR-1830G-0600-B-23 Ra: 90  
LENS: PM-1101 15R  
DRIVER: PUP20A-1WMC 350mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm		
NAME: 2118.127-LEA-14-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2508270591
MFR.: RISE	SUR.: 0.00119025m2	Shielding Angle:

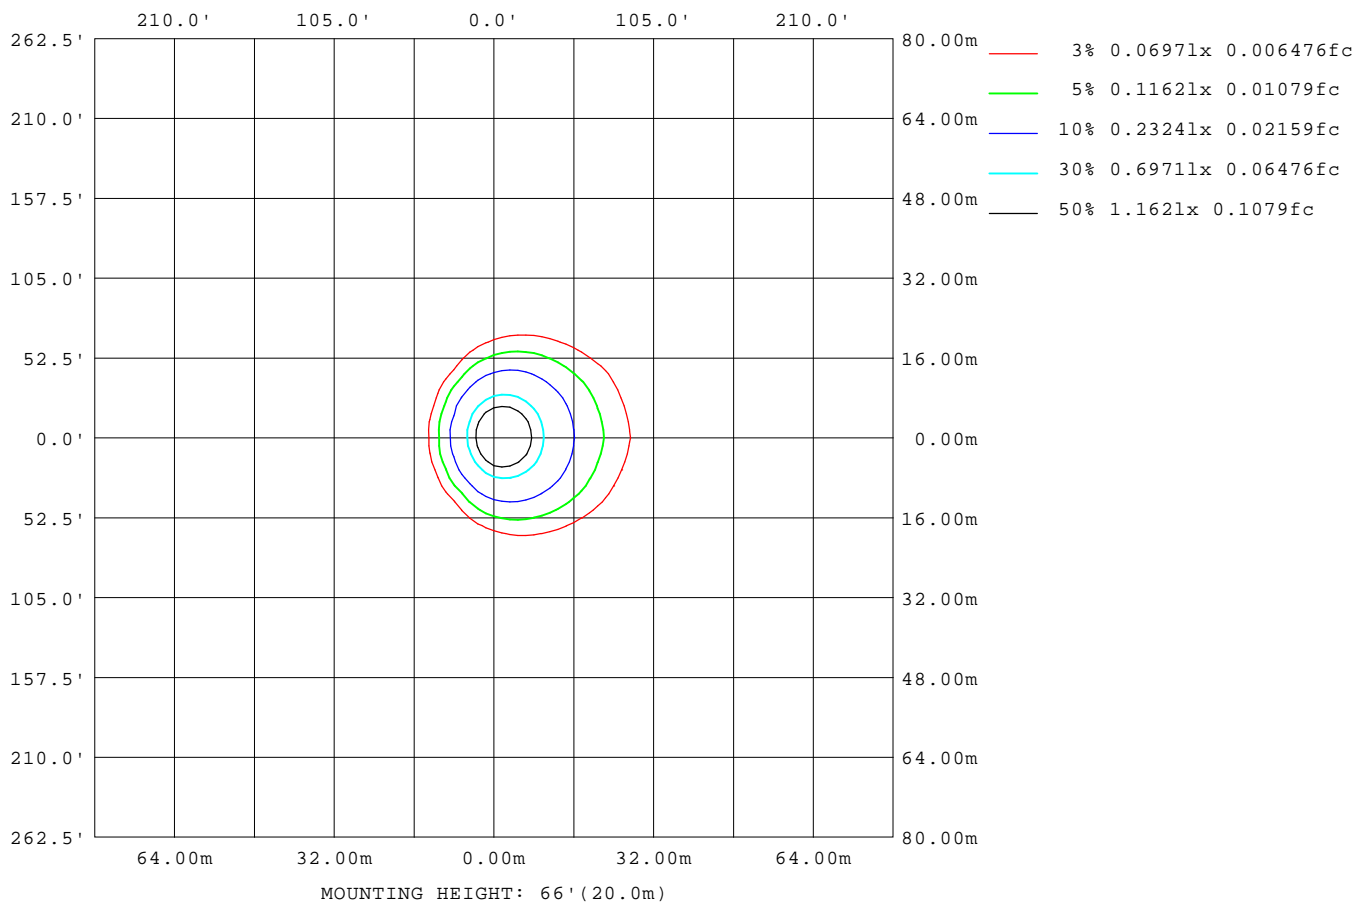

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up

## LED Avg.L Report

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm		
NAME: 2118.127-LEA-14-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2508270591
MFR.: RISE	SUR.: 0.00119025m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	116065
L_0~180(75)av	129228
L_0~180(85)av	84587
L_90~270(65)av	40353
L_90~270(75)av	24656
L_90~270(85)av	15123
L_45(65)av	75311
L_45(75)av	83067
L_45(85)av	65968

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up

## Planar Illuminance Curve

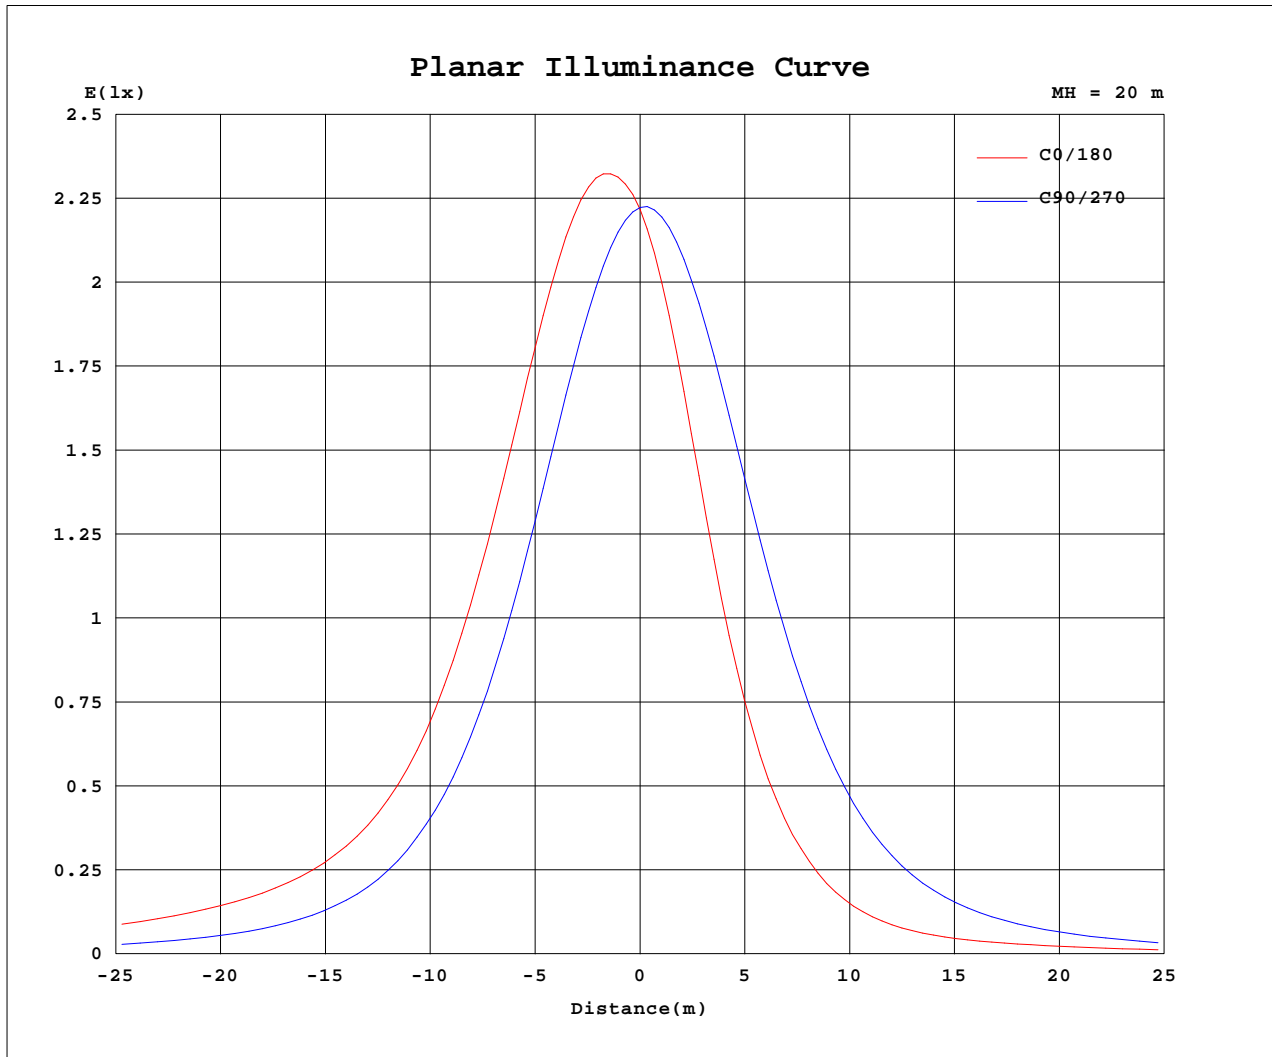

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2025-8-27

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRV-DR-1830G-0600-B-23 Ra: 90  
 LENS: PM-1101 15R  
 DRIVER: PUP20A-1WMC 350mA  
 30minutes warm-up



## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.18V I:0.1252A P:14.950W PF:0.9924 Freq:59.98Hz Lamp Flux:1138.85x1 lm		
NAME: 2118.127-LEA-14-DW	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2508270591
MFR.: RISE	SUR.: 0.00119025m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	887	887	887	887	887	887	887	887	887	887	887	887						
5	940	922	877	827	771	733	725	747	802	856	906	936						
10	895	863	783	696	591	512	493	536	642	744	833	888						
15	761	726	637	532	404	319	298	339	460	587	693	755						
20	589	564	478	377	256	187	172	201	301	427	531	590						
25	430	412	342	255	156	110	99.3	118	188	295	386	432						
30	310	297	241	171	96.1	66.7	60.7	71.0	116	200	276	312						
35	234	222	173	117	62.9	44.2	41.0	46.5	73.9	138	199	232						
40	189	172	128	83.3	44.3	33.6	31.9	34.5	50.7	98.3	148	182						
45	163	142	99.7	62.9	34.7	27.5	26.3	28.1	38.4	74.3	115	152						
50	146	122	79.8	49.2	27.8	23.0	21.9	23.3	30.9	57.8	92.8	133						
55	132	107	62.2	37.4	22.1	18.8	18.1	19.3	24.5	44.2	74.1	119						
60	119	93.1	47.5	27.3	16.9	14.8	14.6	15.2	18.7	31.9	57.4	105						
65	105	81.2	35.8	18.8	12.6	11.7	11.6	12.0	14.0	21.8	44.3	92.9						
70	92.6	71.8	27.8	11.6	9.18	8.71	8.73	9.03	9.90	13.8	35.5	82.8						
75	73.5	58.6	22.3	6.86	6.09	6.02	6.12	6.28	6.67	8.33	29.4	67.7						
80	45.1	37.8	15.1	3.61	2.47	3.63	3.77	3.84	3.93	4.83	20.3	43.7						
85	15.8	14.3	6.06	1.13	1.37	1.58	1.72	1.75	1.72	2.01	9.56	17.0						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2025-8-27

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRV-DR-1830G-0600-B-23 Ra:90  
LENS:PM-1101 15R  
DRIVER:PUP20A-1WMC 350mA  
30minutes warm-up