




EPIC-65-RTF



Product specification

INTERIOR RECESSED DOWNLIGHTS

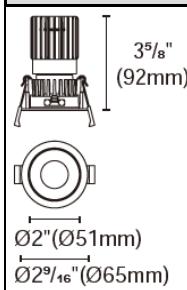

Cut out :
 $2\frac{12}{32}$ " (60mm)

Technical Specification

Article number	2118.137-LEA-13
----------------	-----------------

LED Consumption	9W
-----------------	----

Fixture Consumption	12W
---------------------	-----

Current / Voltage	250mA / 36.5Vdc
-------------------	-----------------

CRI	90+
-----	-----

CCT	3000K
-----	-------

LED Lumen ^{*1}	913lm
-------------------------	-------

Delivered Lumen	766lm
-----------------	-------

Beam Angle available	20°/40°/55°
----------------------	-------------

Driver Technical Specification

Driver Brand	EUCHIPS	Driver Model	PUP10T-1LMC-350
--------------	---------	--------------	-----------------

Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	250mA / 9-40Vdc
---------------------------------	----------------------	--------------------------	-----------------

Dimming / Flicker	Triac / Flicker-free	Certification	UL
-------------------	----------------------	---------------	----

Power Factor	>0.9	Warranty	5 years
--------------	------	----------	---------

Technical character

Materials

Products Standard	UL1598	Luminaire	Aluminum die cast
-------------------	--------	-----------	-------------------

		Trim	Aluminum die cast
--	--	------	-------------------

Insulation	CLASS III	Optics	PMMA Lens
------------	-----------	--------	-----------

Protection	Wet Location	Heat sink	Forged aluminum
------------	--------------	-----------	-----------------

Tilt / Rotate	Non / Non	Fixture color available	white / black
---------------	-----------	-------------------------	---------------


Operating temperature	0~35°C	Baffle	Aluminum die cast
-----------------------	--------	--------	-------------------

Average Failure Time	L70(6k) >33300(h)	Baffle Color available	white / black
----------------------	-------------------	------------------------	---------------

Accessories

ACSG-5
Striped glassACHO-6
Honeycomb louverACDS-3
Diffusion sheetACWG-6
Woven glass

Photometric



h(m)	D(m)	E(lx)
20°		
1.0	0.36	4633
2.0	0.72	1158
3.0	1.08	514
4.0	1.44	289
5.0	1.80	185

ACOT-107
Suction cup

Remarks




*1. LUMEN : for LED chip test result based on $T_c=85^\circ\text{C}$. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.



INSTALLATION OPTIONS




ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
 for EPIC65-2"
 Type: Gear box

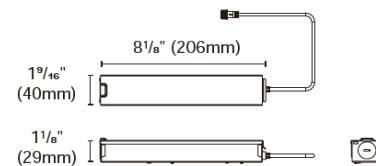

Internal space dimension:
 L 4 1/4" (108mm) X W 1 3/8" (35mm) X H 1" (26mm)




ACCH-12-60 for EPIC65-2"
 Type: New construction plate




Driver is secured on patent designed bracket

ACCH-12D-60-PUP10A-1WMC-350 0/1-10V
ACCH-12D-60-PUP10D-1WMC-350 DALI
ACCH-12D-60-PUP10T-1LMC-350 TRIAC
 for EPIC65-2"
 Type: IC Box

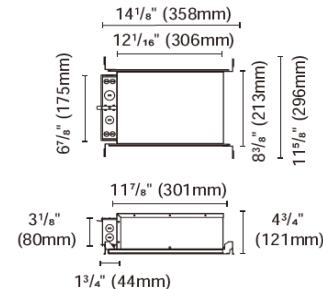

ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

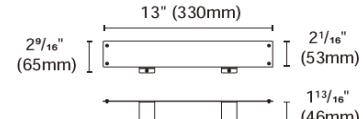

ACCI-5
 Type: Remodel stand

