





AQUA-120-RTF-IP65

Product specification

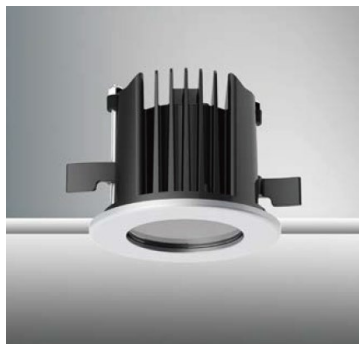

INTERIOR RECESSED DOWNLIGHTS



110

Technical Specification

Article number	2118.148		
LED Consumption	22W		
Fixture Consumption	25W		
Current / Voltage	600mA / 35Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	2211lm	2343lm	2558lm
Delivered Lumen	-	1479lm	-
Beam Angle available	24°/45° (Reflector)		

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character

Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP65
Tilt / Rotate	None / None
Operating temperature	0~35°C
Average Failure Time	L70(11k)>61000(h)

Materials

Luminaire	Aluminum die cast
Trim	Aluminum die cast
Optics	Reflector
Heat sink	Aluminum die cast
Fixture color available	white / black

Accessories

Photometric

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.