


### Luminaire Photograph

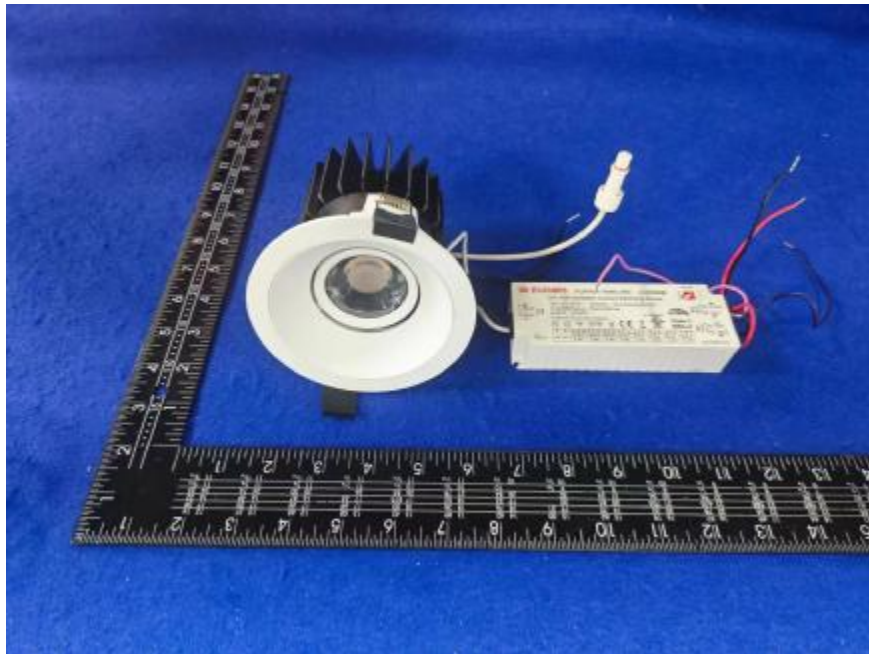

Light Output Ratio:	80.6%	
Luminaire Power:	27.75 W	
SHR Nominal:	0.75	Calculated using the TM5
SHR Maximum:	0.90	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G2000-C-83 Ra: 90  
LENS: PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

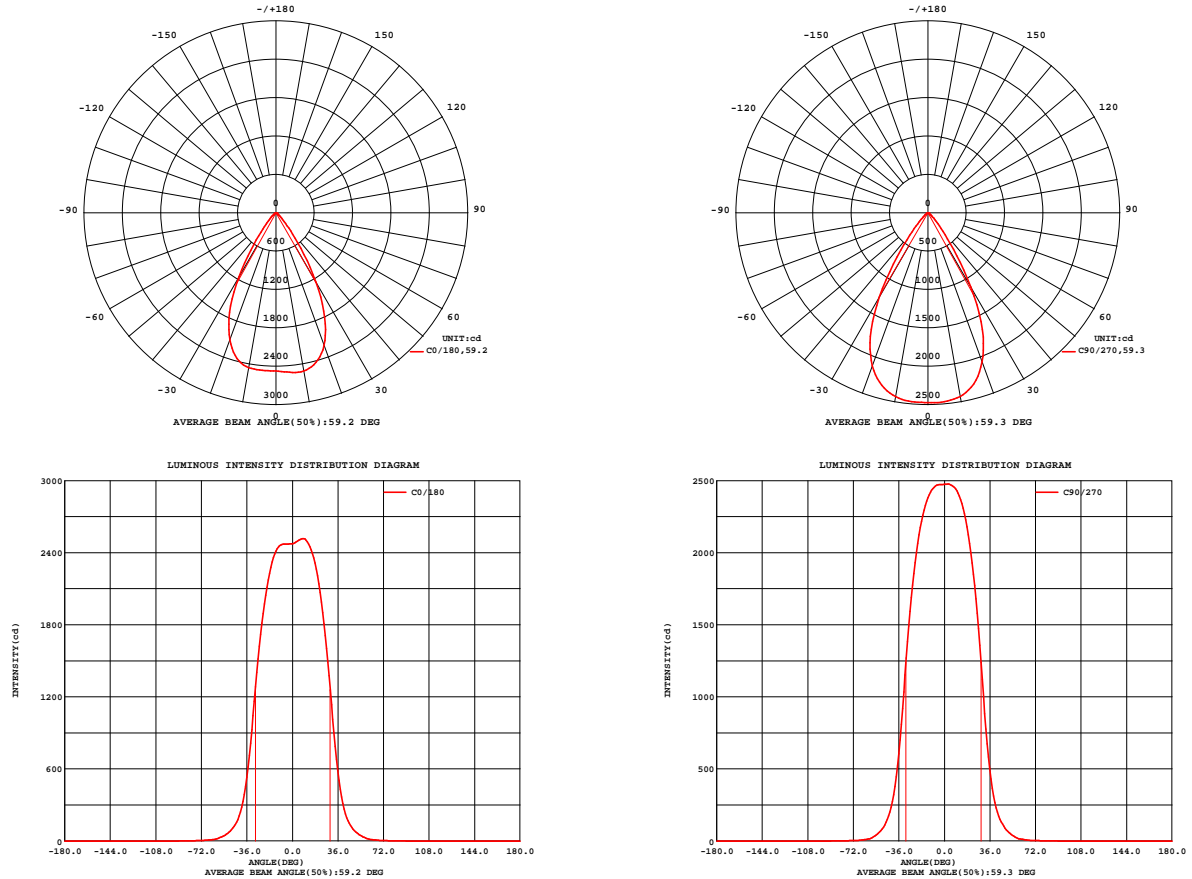


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3 °C  
Operators: zoe  
Test Date: 2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G2000-C-83 Ra: 90  
LENS: PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm		
NAME: 2118.192-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2307170910
MFR.: RISE	SUR.: 0.0063585m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 81.21 lm/W			
MODEL	Bridgelux	I <sub>max</sub> (cd)	2524	S/MH(C0/180)	0.87
NOMINAL POWER(W)	27	LOR(%)	80.6	S/MH(C90/270)	0.89
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	2253.8	UP,DN(C0-180)	0.0,39.7
NOMINAL FLUX(lm)	2796.63	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,40.8
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	120	down(%)	80.6	CIBSE SHR MAX	0.90

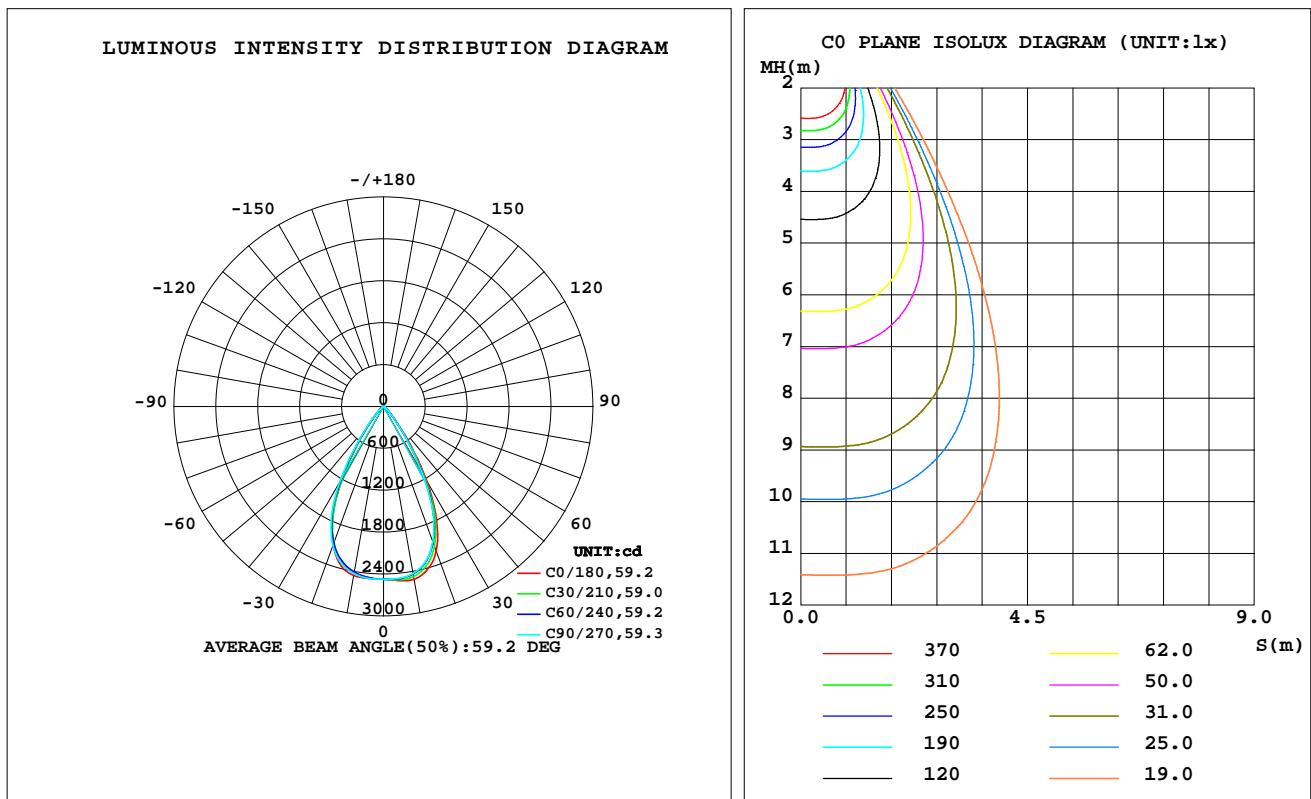

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	2513	2456	2429	2464	2458	2415	2432	2501	0- 10	236.1	236.1	10.5,8.44
20	2206	2104	2063	2112	2112	2079	2123	2201	10- 20	656.5	892.6	39.6,31.9
30	1255	1170	1120	1139	1162	1209	1269	1279	20- 30	780.7	1673	74.2,59.8
40	311.4	280.4	267.8	271.9	281.5	301.7	321.7	322.1	30- 40	416.0	2089	92.7,74.7
50	75.43	70.98	67.40	70.83	71.95	72.37	72.35	75.29	40- 50	117.7	2207	97.9,78.9
60	16.13	15.28	13.59	16.01	17.08	15.49	13.47	14.90	50- 60	35.00	2242	99.5,80.2
70	4.147	3.933	3.571	4.075	4.522	3.752	3.230	3.608	60- 70	8.554	2251	99.9,80.5
80	1.712	1.432	1.238	1.510	1.779	1.342	1.124	1.343	70- 80	2.701	2253	100,80.6
90	0	0	0	0	0	0	0	0	80- 90	0.5722	2254	100,80.6
100	0	0	0	0	0	0	0	0	90-100	0	2254	100,80.6
110	0	0	0	0	0	0	0	0	100-110	0	2254	100,80.6
120	0	0	0	0	0	0	0	0	110-120	0	2254	100,80.6
130	0	0	0	0	0	0	0	0	120-130	0	2254	100,80.6
140	0	0	0	0	0	0	0	0	130-140	0	2254	100,80.6
150	0	0	0	0	0	0	0	0	140-150	0	2254	100,80.6
160	0	0	0	0	0	0	0	0	150-160	0	2254	100,80.6
170	0	0	0	0	0	0	0	0	160-170	0	2254	100,80.6
180	0	0	0	0	0	0	0	0	170-180	0	2254	100,80.6
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz  
Lamp Flux:2796.63x1 lm

NAME: 2118.192-ACOT-84-AM

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2307170910

MFR.: RISE

SUR.: 0.0063585m2

Shielding Angle:

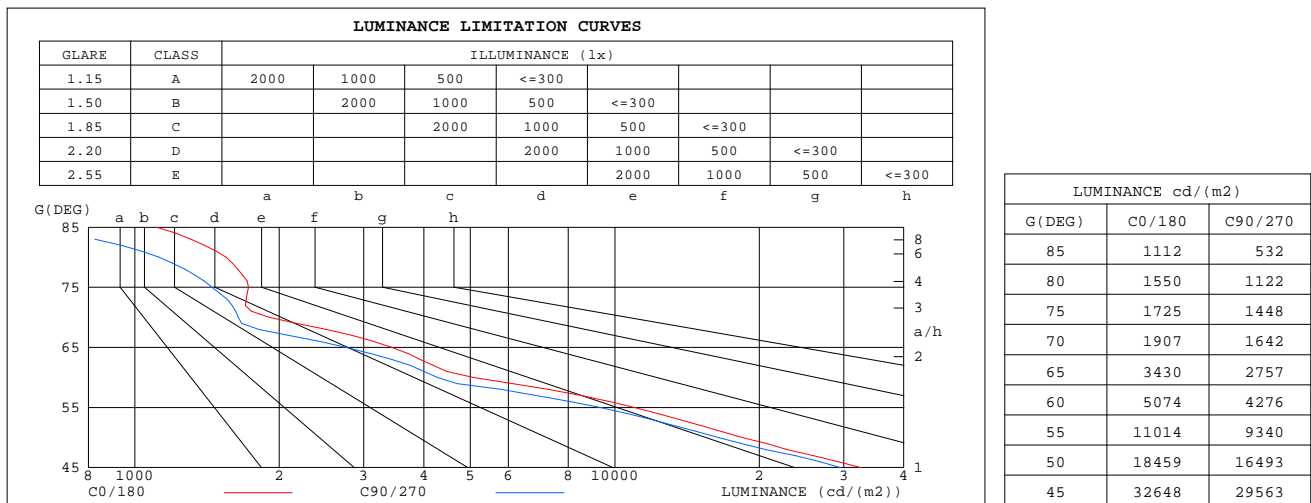


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm		
NAME: 2118.192-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2307170910
MFR.: RISE	SUR.: 0.0063585m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

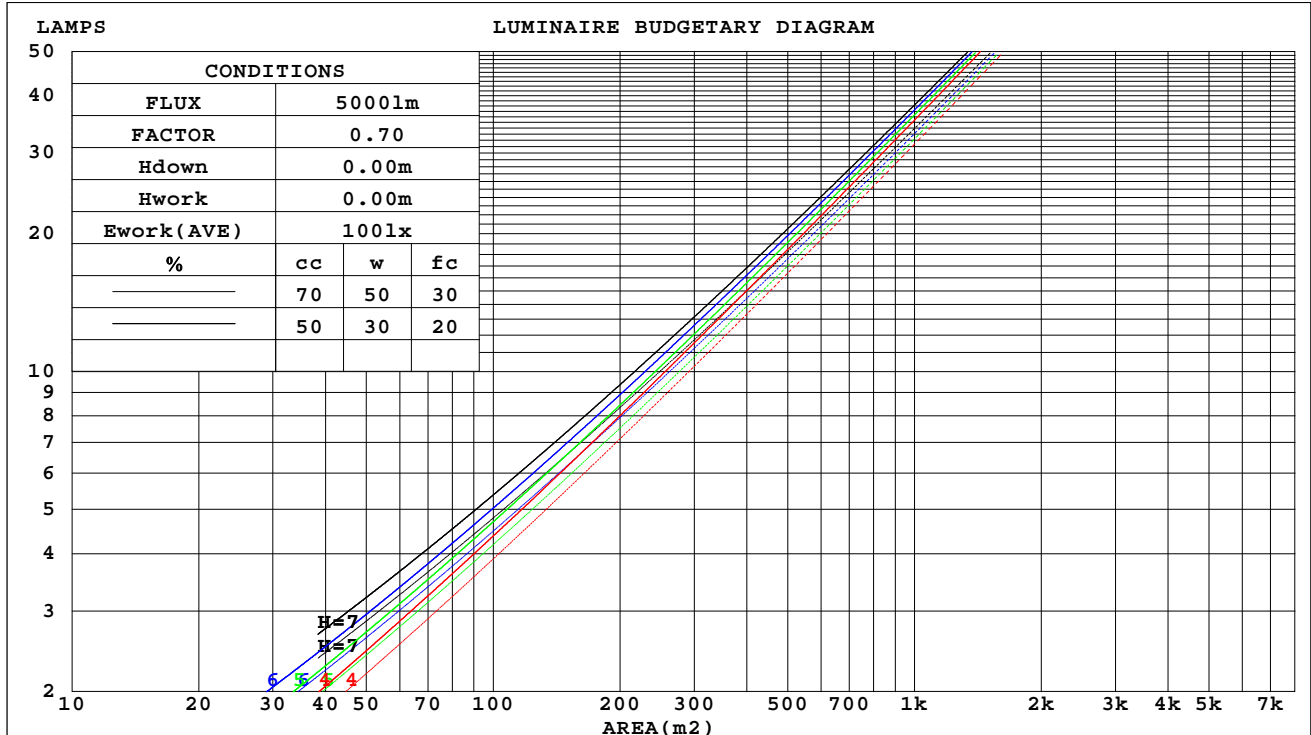

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

### WEC AND CCEC

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm		
NAME: 2118.192-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2307170910
MFR.: RISE	SUR.: 0.0063585m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.142	.081	.026	.137	.078	.025	.127	.073	.023	.117	.068	.022	.109	.063	.020	
2.0	.136	.075	.023	.132	.073	.022	.123	.069	.021	.115	.065	.020	.108	.061	.019	
3.0	.130	.069	.021	.126	.068	.020	.119	.064	.020	.112	.061	.019	.106	.059	.018	
4.0	.124	.064	.019	.121	.063	.019	.114	.061	.018	.108	.058	.018	.103	.056	.017	
5.0	.118	.060	.017	.115	.059	.017	.110	.057	.017	.105	.055	.016	.100	.053	.016	
6.0	.113	.057	.016	.110	.056	.016	.105	.054	.016	.101	.052	.015	.097	.051	.015	
7.0	.108	.053	.015	.106	.053	.015	.101	.051	.015	.097	.050	.015	.094	.049	.014	
8.0	.103	.050	.014	.101	.050	.014	.097	.049	.014	.094	.048	.014	.091	.046	.014	
9.0	.099	.048	.013	.097	.047	.013	.094	.046	.013	.091	.045	.013	.088	.044	.013	
10.0	.095	.046	.013	.093	.045	.013	.090	.044	.012	.087	.043	.012	.085	.043	.012	

cc	80%			70%			50%			30%			10%			0	
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
fc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.154	.154	.154	.131	.131	.131	.090	.090	.090	.051	.051	.051	.016	.016	.016		
1.0	.138	.127	.117	.118	.109	.101	.081	.075	.070	.046	.043	.040	.015	.014	.013		
2.0	.126	.107	.091	.108	.092	.079	.074	.064	.055	.043	.037	.032	.014	.012	.010		
3.0	.116	.092	.072	.099	.079	.063	.068	.055	.044	.039	.032	.026	.013	.010	.008		
4.0	.107	.080	.058	.092	.069	.051	.063	.048	.036	.037	.028	.021	.012	.009	.007		
5.0	.100	.070	.048	.086	.061	.042	.059	.043	.030	.034	.025	.018	.011	.008	.006		
6.0	.095	.063	.040	.081	.054	.035	.056	.038	.025	.033	.022	.015	.010	.007	.005		
7.0	.089	.057	.034	.077	.049	.030	.053	.034	.021	.031	.020	.012	.010	.007	.004		
8.0	.085	.052	.029	.073	.045	.025	.051	.032	.018	.029	.019	.011	.010	.006	.004		
9.0	.081	.048	.025	.070	.041	.022	.048	.029	.016	.028	.017	.009	.009	.006	.003		
10.0	.077	.044	.022	.066	.038	.019	.046	.027	.014	.027	.016	.008	.009	.005	.003		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm										
NAME: 2118.192-ACOT-84-AM					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2307170910		
MFR.: RISE					SUR.: 0.0063585m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.8	17.7	17.0	17.9	18.0	16.1	17.1	16.4	17.3	17.4
3H	16.6	17.5	16.9	17.7	17.9	16.0	16.8	16.2	17.0	17.3
4H	16.5	17.4	16.8	17.6	17.8	15.9	16.7	16.2	16.9	17.2
6H	16.4	17.2	16.7	17.5	17.7	15.8	16.6	16.1	16.8	17.1
8H	16.4	17.1	16.7	17.4	17.7	15.8	16.5	16.1	16.8	17.0
12H	16.4	17.1	16.7	17.3	17.6	15.7	16.4	16.0	16.7	17.0
4H 2H	16.5	17.4	16.8	17.6	17.8	15.9	16.7	16.2	17.0	17.2
3H	16.4	17.1	16.7	17.4	17.6	15.8	16.5	16.1	16.7	17.0
4H	16.3	16.9	16.6	17.2	17.5	15.7	16.3	16.0	16.6	16.9
6H	16.2	16.8	16.6	17.1	17.4	15.6	16.1	16.0	16.5	16.8
8H	16.2	16.7	16.6	17.0	17.4	15.5	16.1	15.9	16.4	16.8
12H	16.1	16.6	16.5	17.0	17.3	15.5	16.0	15.9	16.3	16.7
8H 4H	16.2	16.7	16.5	17.0	17.4	15.5	16.0	15.9	16.4	16.8
6H	16.1	16.5	16.5	16.9	17.3	15.4	15.9	15.9	16.3	16.7
8H	16.0	16.4	16.5	16.8	17.2	15.4	15.8	15.8	16.2	16.6
12H	16.0	16.3	16.4	16.7	17.2	15.3	15.7	15.8	16.1	16.6
12H 4H	16.1	16.6	16.5	16.9	17.3	15.5	16.0	15.9	16.3	16.7
6H	16.0	16.4	16.5	16.8	17.2	15.4	15.8	15.8	16.2	16.6
8H	16.0	16.3	16.4	16.7	17.2	15.3	15.7	15.8	16.1	16.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 3.5 / - 8.3					+ 3.2 / - 8.7				
1.5H	+ 5.4 / - 5.9					+ 5.0 / - 6.0				
2.0H	+ 5.3 / - 6.2					+ 5.2 / - 6.5				

CIE Pub.117, 2797 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.6)  
Area: 0.0063585 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up



### UTILIZATION FACTORS TABLE

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm		
NAME: 2118.192-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2307170910
MFR.: RISE	SUR.: 0.0063585m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	70	65	62	70	65	62	69	64	62	59
0.80	76	71	68	76	71	68	75	71	68	65
1.00	80	75	72	79	75	72	78	75	72	69
1.25	83	79	76	82	78	76	81	78	75	72
1.50	85	82	79	84	81	78	83	80	78	74
2.00	87	84	82	86	83	81	84	82	80	76
2.50	89	86	83	88	85	83	85	83	81	76
3.00	90	87	85	89	86	84	86	84	83	77
4.00	92	89	88	90	88	87	87	86	84	79
5.00	93	91	89	91	89	88	88	87	86	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm		
NAME: 2118.192-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2307170910
MFR.: RISE	SUR.: 0.0063585m2	Shielding Angle:

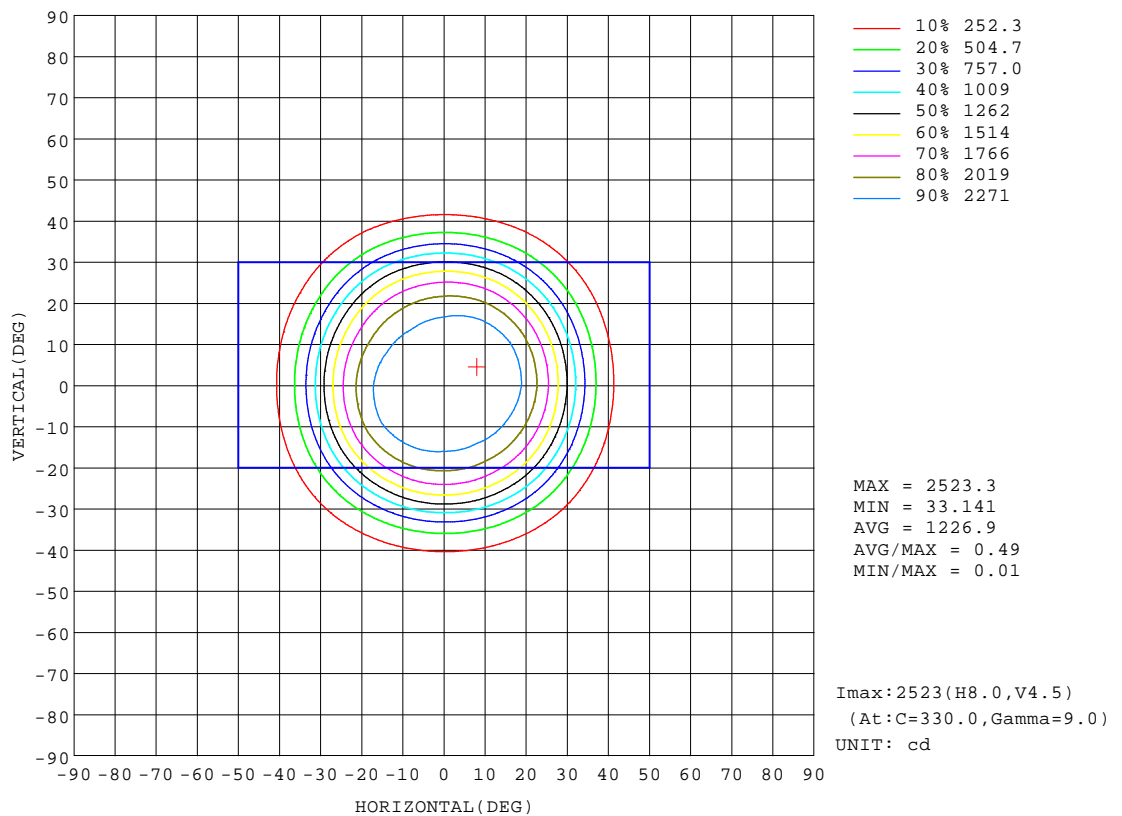


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## AAI Figure

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm		
NAME: 2118.192-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2307170910
MFR.: RISE	SUR.: 0.0063585m2	Shielding Angle:

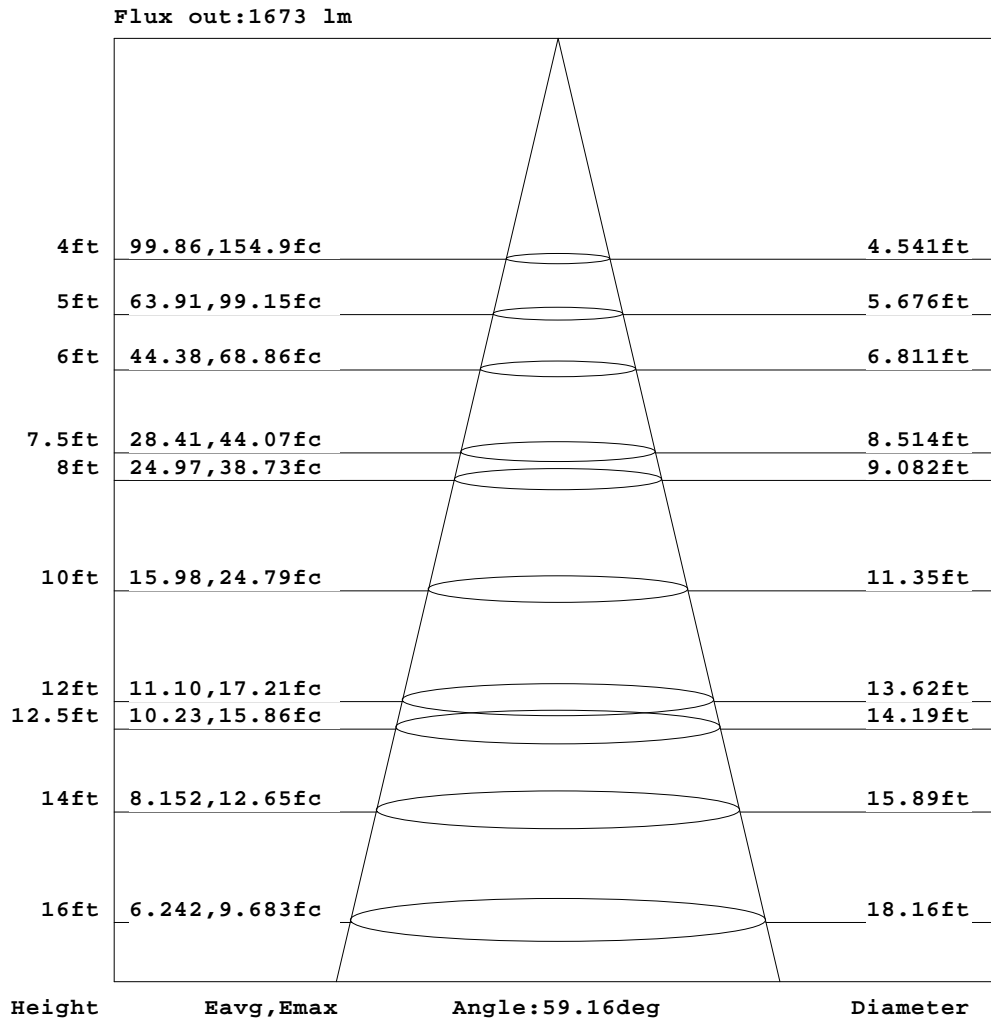


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators: zoe  
Test Date: 2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: BXRE-30G2000-C-83 Ra: 90  
LENS: PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm		
NAME: 2118.192-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2307170910
MFR.: RISE	SUR.: 0.0063585m2	Shielding Angle:

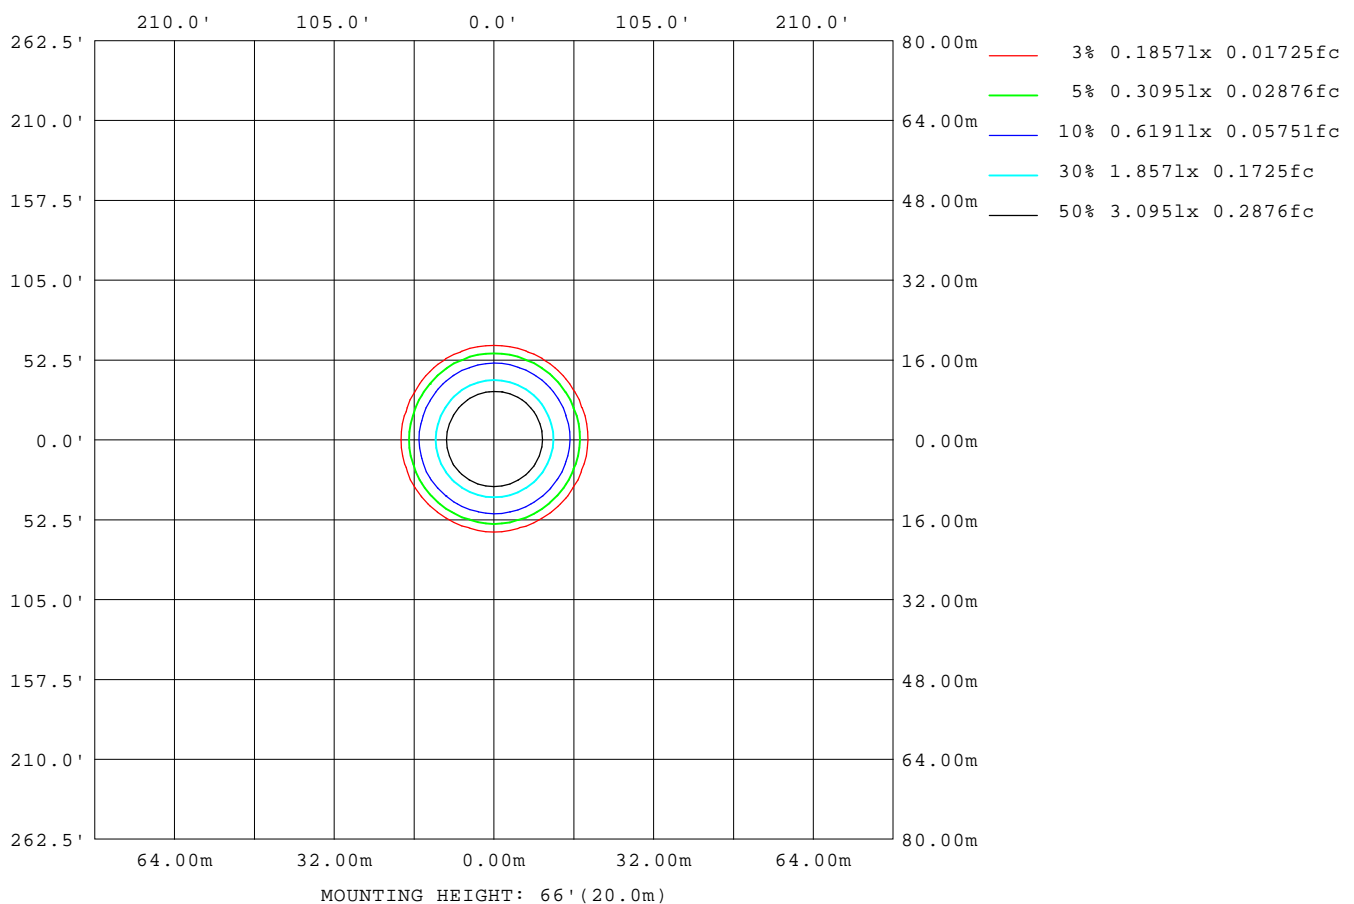

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## LED Avg.L Report

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm		
NAME: 2118.192-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2307170910
MFR.: RISE	SUR.: 0.0063585m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	3484
L_0~180(75)av	1744
L_0~180(85)av	1211
L_90~270(65)av	2656
L_90~270(75)av	1403
L_90~270(85)av	483
L_45(65)av	3195
L_45(75)av	1565
L_45(85)av	711

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up

## Planar Illuminance Curve

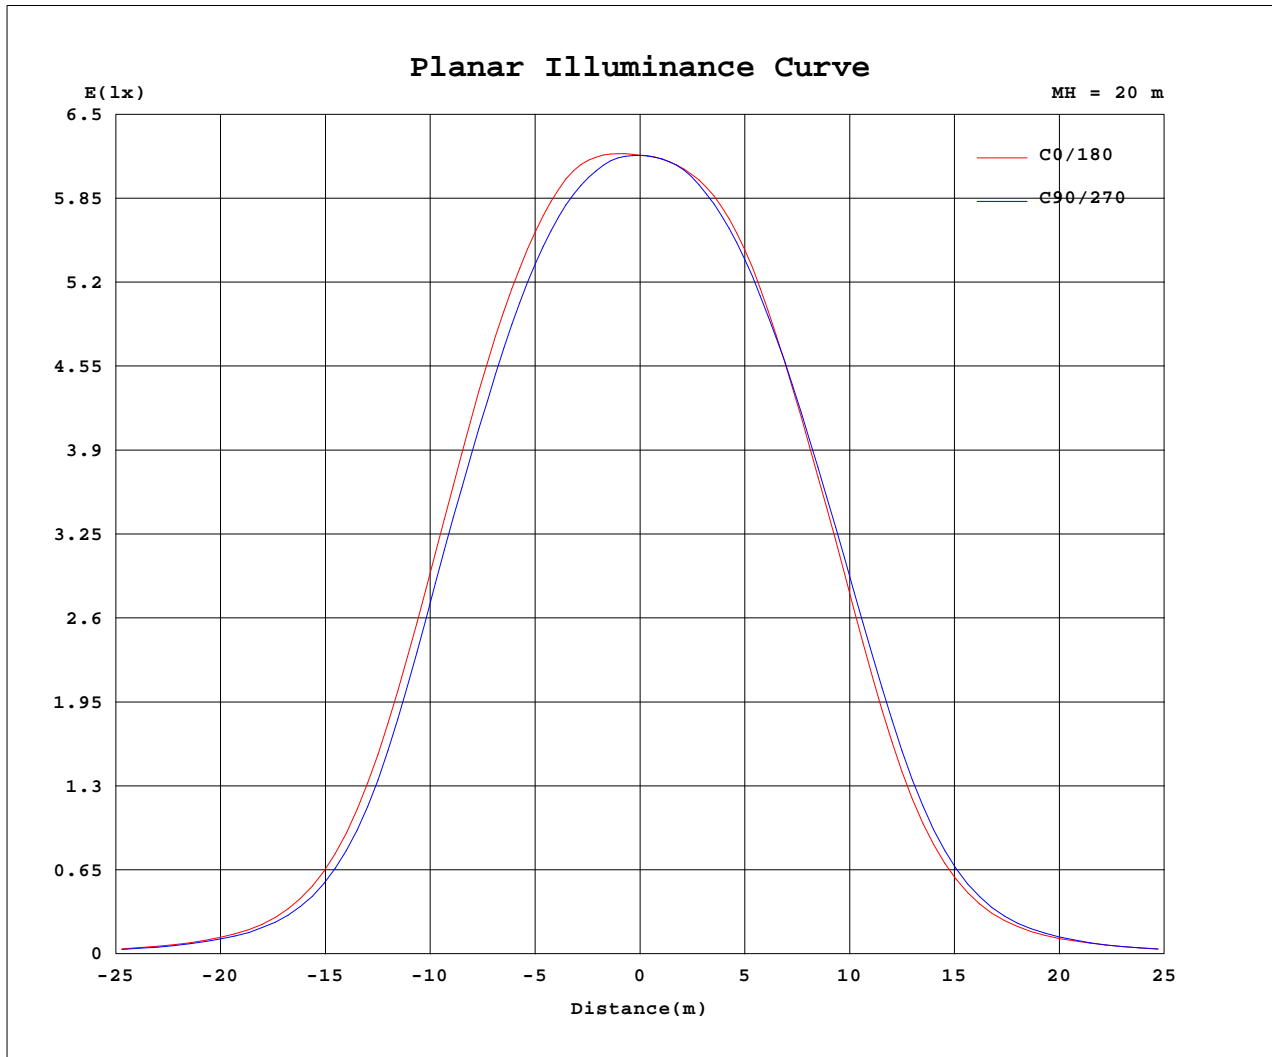

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators: zoe  
 Test Date: 2023-7-17

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: BXRE-30G2000-C-83 Ra:90  
 LENS: PM-1083C 50R  
 DRIVER: PUP40A-1WMC-850 700mA  
 30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.12V I:0.2329A P:27.753W PF:0.9905 Freq:59.98Hz Lamp Flux:2796.63x1 lm		
NAME: 2118.192-ACOT-84-AM	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2307170910
MFR.: RISE	SUR.: 0.0063585m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2474	2474	2474	2474	2474	2474	2474	2474	2474	2474	2474	2474						
5	2503	2490	2477	2471	2472	2478	2471	2460	2459	2471	2487	2502						
10	2513	2473	2438	2429	2451	2477	2458	2420	2409	2432	2481	2522						
15	2422	2362	2314	2308	2346	2390	2359	2307	2294	2329	2392	2445						
20	2206	2134	2075	2063	2091	2132	2112	2072	2085	2123	2183	2220						
25	1807	1751	1690	1680	1689	1726	1720	1709	1750	1775	1816	1820						
30	1255	1196	1145	1120	1123	1155	1162	1173	1244	1269	1288	1270						
35	682	634	600	583	584	610	618	629	686	700	708	698						
40	311	288	273	268	266	278	282	287	316	322	325	320						
45	147	138	134	133	131	135	137	138	151	151	152	149						
50	75.4	72.6	69.3	67.4	69.2	72.5	71.9	71.1	73.7	72.4	75.0	75.6						
55	40.2	39.4	35.6	34.1	36.5	39.8	39.4	38.7	37.5	35.0	38.4	40.1						
60	16.1	16.5	14.1	13.6	14.3	17.7	17.1	16.7	14.3	13.5	14.2	15.6						
65	9.22	9.40	7.92	7.41	8.09	9.57	9.51	9.21	7.67	6.87	7.67	8.86						
70	4.15	4.27	3.60	3.57	3.63	4.52	4.52	4.21	3.29	3.23	3.29	3.93						
75	2.84	2.74	2.55	2.38	2.62	2.82	2.90	2.60	2.35	2.23	2.35	2.59						
80	1.71	1.54	1.32	1.24	1.38	1.64	1.78	1.47	1.21	1.12	1.22	1.47						
85	0.62	0.43	0.34	0.30	0.37	0.58	0.73	0.45	0.29	0.24	0.28	0.47						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3℃  
Operators:zoe  
Test Date:2023-7-17

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.461  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:BXRE-30G2000-C-83 Ra:90  
LENS:PM-1083C 50R  
DRIVER: PUP40A-1WMC-850 700mA  
30minutes warm-up