




## EPIC-65-RTLF

## Product specification



## INTERIOR RECESSED DOWNLIGHTS



60

## Technical Specification

|                         |                   |       |       |
|-------------------------|-------------------|-------|-------|
| Article number          | 2118.200F-ACOT-68 |       |       |
| LED Consumption         | 10W               |       |       |
| Fixture Consumption     | 11W               |       |       |
| Current / Voltage       | 250mA / 36Vdc     |       |       |
| CRI                     | 90+               |       |       |
| CCT                     | 2700K             | 3000K | 4000K |
| LED Lumen <sup>*1</sup> | 872lm             | 913lm | 981lm |
| Delivered Lumen         | -                 | 766lm | -     |
| Beam Angle available    | 20°/40°/55°       |       |       |

## Driver Technical Specification (Remoted)

|                                 |   |                          |   |
|---------------------------------|---|--------------------------|---|
| Driver Brand                    | - | Driver Model             | - |
| Input voltage / Frequency range | - | Output Current / Voltage | - |
| Dimming / Flicker               | - | Certification            | - |
| Power Factor                    | - | Warranty                 | - |

## Technical character

|                       |                   |
|-----------------------|-------------------|
| Products Standard     | IEC 60598-1       |
|                       | IEC 62031         |
| Insulation            | CLASS II          |
| Protection            | IP44              |
| Tilt / Rotate         | Non / Non         |
| Operating temperature | 0~35°C            |
| Average Failure Time  | L70(6k) >33300(h) |


## Materials

|                         |                   |
|-------------------------|-------------------|
| Luminaire               | Aluminum die cast |
| Trim                    | Aluminum die cast |
| Optics                  | PMMA Lens         |
| Heat sink               | Forged aluminum   |
| Fixture color available | white / black     |
| Baffle                  | Aluminum die cast |
| Baffle Color available  | white / black     |

## Accessories

ACSG-5  
Striped glassACHO-6  
Honeycomb louverACDS-3  
Diffusion sheetACWG-6  
Woven glassACOT-107  
Suction cup

## Photometric

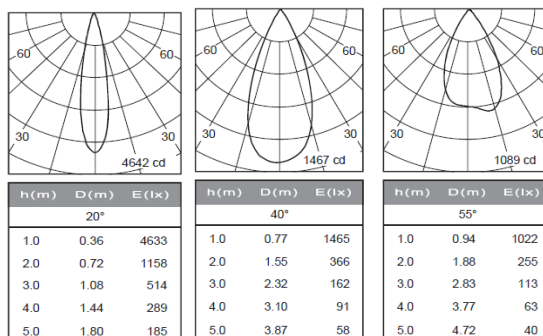

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.