



EPIC-85-RTLFL

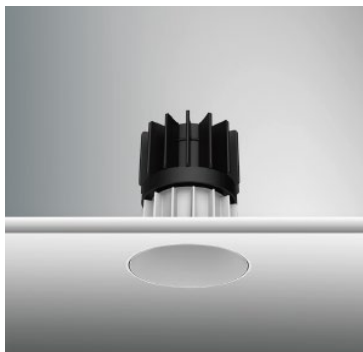

Product specification

INTERIOR RECESSED DOWNLIGHTS



80

Technical Specification

Article number	2118.206F-ACOT-70		
LED Consumption	9W		
Fixture Consumption	-		
Current / Voltage	250mA / 32.9Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1017lm	1059lm	1075lm
Delivered Lumen	-	-	-
Beam Angle available	30°/50°/60°		

Driver Technical Specification (Remoted)


Driver Brand	TRIDONIC	Driver Model	LCA 10W 150-400mA one4all SR PRE
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	250mA / 15-40Vdc
Dimming / Flicker	DALI dimming / Free	Certification	ENEC/CE/CCC
Power Factor	>0.9	Warranty	5years

Technical character

Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	Non / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(9k)>50000(h)	Baffle Color available	white / black

Accessories

Photometric

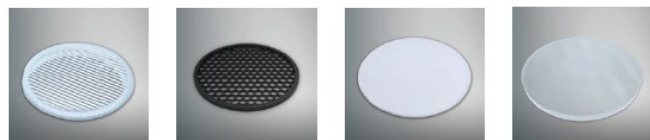ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cupACOT-103
MR16 Accessory kitsACOT-104
GU10 Accessory kitsPK-0250
MR16&GU10 Accessory

Remarks

