





EPIC-85-RTLA

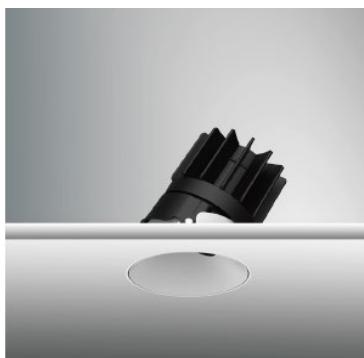

Product specification

INTERIOR RECESSED DOWNLIGHTS

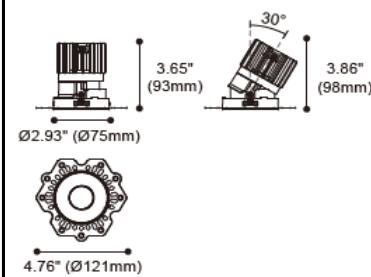

80

Technical Specification

Article number 2118.207F-ACOT-70

LED Consumption 9W

Fixture Consumption -

Current / Voltage 250mA / 32.9Vdc

CRI 90+

CCT 2700K 3000K 4000K

LED Lumen *1 1017lm 1059lm 1075lm

Delivered Lumen - - -

Beam Angle available 30°/50°/60°

Driver Technical Specification (Remoted)

Driver Brand	TRIDONIC	Driver Model	LCA 10W 150-400mA one4all SR PRE
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	250mA / 15-40Vdc
Dimming / Flicker	DALI dimming / Free	Certification	ENEC/CE/CCC
Power Factor	>0.9	Warranty	5years


Technical character

Materials

Products Standard	IEC 60598-1 IEC 62031	Luminaire	Aluminum die cast
Insulation	CLASS II	Trim	Aluminum die cast
Protection	IP44	Optics	PMMA Lens
Tilt / Rotate	0~30° / 0~355°	Heat sink	Forged aluminum
Operating temperature	0~35°C	Fixture color available	white / black
Average Failure Time	L70(9k)>50000(h)	Baffle	Aluminum die cast
		Baffle Color available	white / black

Accessories

Photometric

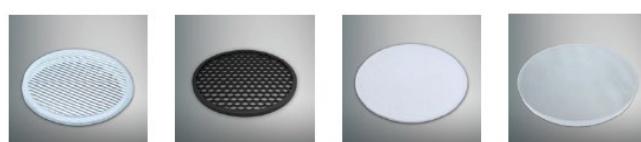ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cupACOT-103
MR16 Accessory kitsACOT-104
GU10 Accessory kitsPK-0250
MR16&GU10 Accessory

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.