

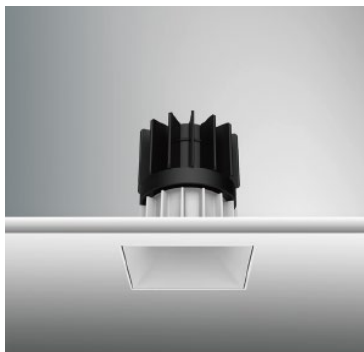


EPIC-85-STLF



Product specification

INTERIOR RECESSED DOWNLIGHTS



Technical Specification


Article number	2118.209A-ACOT-70		
LED Consumption	12W		
Fixture Consumption	15W		
Current / Voltage	350mA / 33.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1389lm	1446lm	1469lm
Delivered Lumen	-	1172lm	-
Beam Angle available	30°/50°/60°		

Driver Technical Specification (Remoted)


Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	Non / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(9k)>50000(h)	Baffle Color available	white / black

Accessories

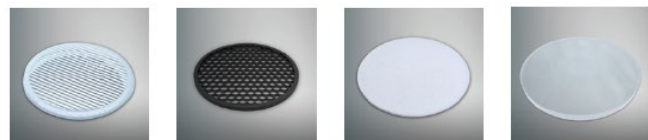ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cupACOT-103
MR16 Accessory kitsACOT-104
GU10 Accessory kitsPK-0250
MR16&GU10 Accessory

Photometric

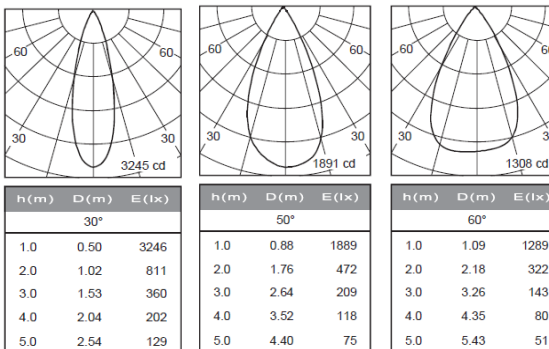

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.