




EPIC-85-STLA



Product specification

INTERIOR RECESSED DOWNLIGHTS

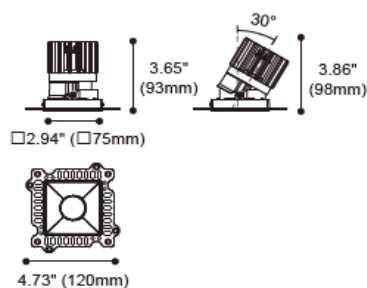

Technical Specification


Article number	2118.210A-ACOT-70		
LED Consumption	12W		
Fixture Consumption	15W		
Current / Voltage	350mA / 33.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1389lm	1446lm	1469lm
Delivered Lumen	-	1135lm	-
Beam Angle available	30°/50°/60°		

Driver Technical Specification (Remoted)


Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(9k)>50000(h)	Baffle Color available	white / black

Accessories

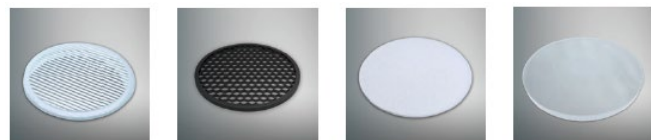ACSG-4
Striped glassACHO-5
Honeycomb louverACDS-4
Diffusion sheetACWG-5
Woven glassACOT-108
Suction cupACOT-103
MR16 Accessory kitsACOT-104
GU10 Accessory kitsPK-0250
MR16&GU10 Accessory

Photometric

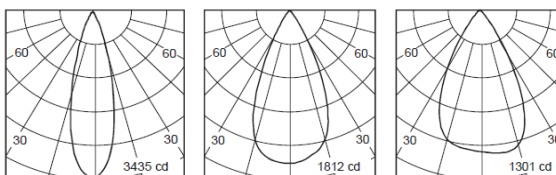

h(m)	D(m)	E(lx)
30°		
1.0	0.49	3438
2.0	0.98	859
3.0	1.47	382
4.0	1.97	214
5.0	2.46	137

h(m)	D(m)	E(lx)
50°		
1.0	0.89	1812
2.0	1.79	453
3.0	2.68	201
4.0	3.57	113
5.0	4.46	72

h(m)	D(m)	E(lx)
60°		
1.0	1.08	1263
2.0	2.16	315
3.0	3.24	140
4.0	4.32	78
5.0	5.40	50

Remarks

