





EPIC-85-STLA-15

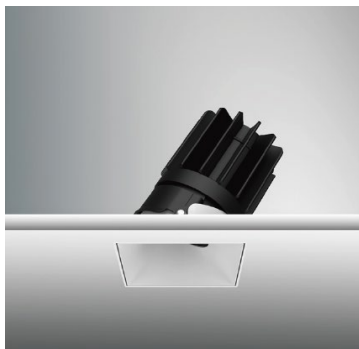

Product specification

INTERIOR RECESSED DOWNLIGHTS

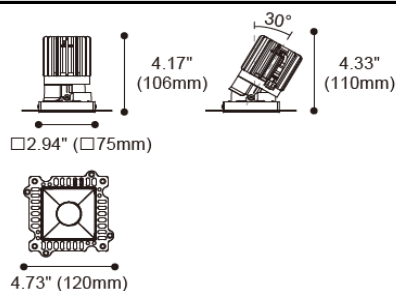

Technical Specification

Article number	2118.210A-ACOT-71A
LED Consumption	10W
Fixture Consumption	-
Current / Voltage	800mA / 12Vdc
CRI	90+
CCT	3000K
LED Lumen ^{*1}	784lm
Delivered Lumen	-
Beam Angle available	15°

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-


Technical character

Products Standard	IEC 60598-1
	IEC 62031
Insulation	CLASS II
Protection	IP44
Tilt / Rotate	0~30° / Non
Operating temperature	0~35°C
Average Failure Time	L70(12k)>72600(h)

Materials

Luminaire	Aluminum die cast
Trim	Aluminum die cast
Optics	PMMA Lens
Heat sink	Forged aluminum
Fixture color available	white / black
Baffle	Aluminum die cast
Baffle Color available	white / black

Accessories

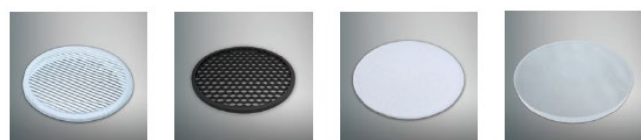


ACSG-4 Striped glass ACHO-5 Honeycomb louver ACDS-4 Diffusion sheet ACWG-5 Woven glass



ACOT-108 Suction cup ACOT-103 MR16 Accessory kits ACOT-104 GU10 Accessory kits PK-0250 MR16&GU10 Accessory

Photometric

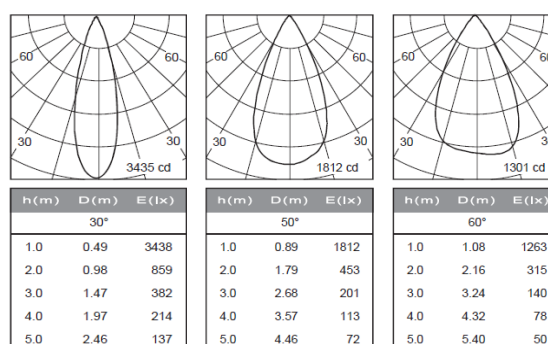

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.