




EPIC-65-STLA



Product specification

INTERIOR RECESSED DOWNLIGHTS



Cut out :
2¹²/₃₂" X 2¹²/₃₂"

Technical Specification

Article number	2118.241A-LEA-13
LED Consumption	9W
Fixture Consumption	12W
Current / Voltage	250mA / 36.5Vdc
CRI	90+
CCT	3000K
LED Lumen ^{*1}	913lm
Delivered Lumen	755lm
Beam Angle available	20°/40°/55°

Driver Technical Specification

Driver Brand	EUCHIPS	Driver Model	PUP10T-1LMC-350
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	250mA / 9-40Vdc
Dimming / Flicker	Triac / Flicker-free	Certification	UL
Power Factor	>0.9	Warranty	5 years

Technical character

Products Standard	UL1598	Luminaire	Aluminum die cast
		Trim	Aluminum die cast
Insulation	CLASS III	Optics	PMMA Lens
Protection	Damp Location	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(6k) >33300(h)	Baffle Color available	white / black

Accessories



ACSG-5
Striped glass



ACHO-6
Honeycomb louver



ACDS-3
Diffusion sheet




ACWG-6
Woven glass



ACOT-107
Suction cup

Photometric

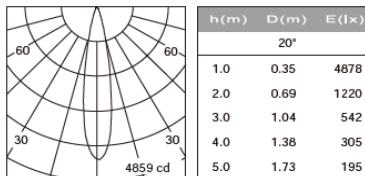

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.



INSTALLATION OPTIONS





ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
 for EPIC65-2"
 Type: Gear box

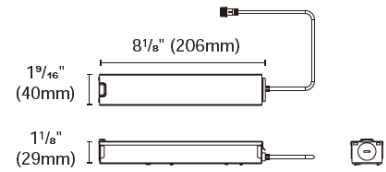


Internal space dimension:
 L 4 1/4" (108mm) X W 1 3/8" (35mm) X H 1" (26mm)



ACCH-12-60 for EPIC65-2"
 Type: New construction plate

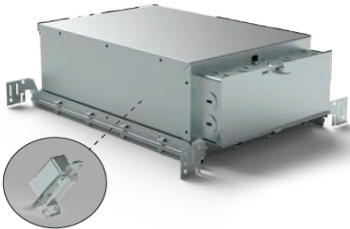


ACCH-12D-60-PUP10A-1WMC-350 0/1-10V
ACCH-12D-60-PUP10D-1WMC-350 DALI
ACCH-12D-60-PUP10T-1LMC-350 TRIAC
 for EPIC65-2"
 Type: IC Box



Driver is secured on patent designed bracket



ACCI-3
 Type: Emergency battery holder
 For BillDa emergency led driver-
 Model NO. BLD-HM08D-YYY
 BLD-HM15D-YYY
 BLD-HM20D-YYY
 BLD-HM25D-YYY

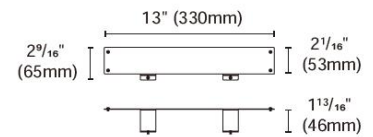

ACCI-5
 Type: Remodel stand

