
WRISE

LOTUS-80-RTF



Product specification

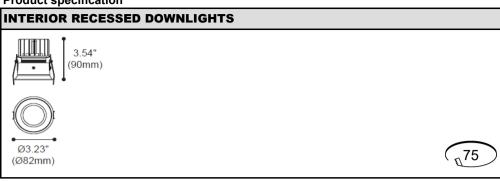

| Technical Specification | | | | |
|---|---------------|----------------------------|--------|--|
| Article number | 2118.524-A0 | 2118.524-ACOT-36 | | |
| LED Consumption | 14W | 14W | | |
| Fixture Consumption | - | | | |
| Current / Voltage | 350mA / 38. | 350mA / 38.4Vdc | | |
| CRI | 90+ | 90+ | | |
| сст | 2700K | 3000K | 4000K | |
| LED Lumen *1 | 1139lm | 1193lm | 1282lm | |
| Delivered Lumen | - | | | |
| Beam Angle available | 15°/24°/50° | 15°/24°/50° (Lens) | | |
| Driver Technical Specification (Remote | ed) | | | |
| Driver Brand - | Driver Mode | Driver Model - | | |
| Input voltage / Freqency range - | Output Curi | Output Current / Voltage - | | |
| Dimming / Flicker - | Certification | Certification - | | |
| Power Factor - | Warranty | Warranty - | | |

| Technical character | | Materials | Materials | |
|-----------------------|-------------|-------------------------|-------------------|--|
| Products Standard | IEC 60598-1 | Luminaire | Aluminum die cast | |
| | IEC 62031 | Trim | - | |
| Insulation | CLASS II | Optics | PMMA Lens | |
| Protection | IP20 | Heat sink | Forged aluminum | |
| Tilt / Rotate | Non / Non | Fixture color available | white / black | |
| Operating temperature | 0~35°C | | | |
| Average Failure Time | - | | | |

Photometric

Accessories







H7-1 Honeycomb louver



DS7-1 Diffusion sheet



WG7-1 Woven glass

Remarks

