




AMAFI-85V-RTA

Product specification



INTERIOR RECESSED DOWNLIGHTS

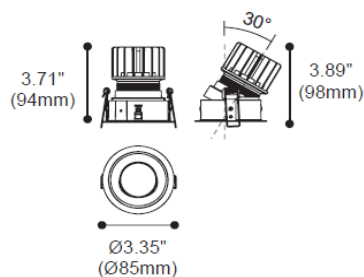

78

Technical Specification

| | |
|-------------------------|------------------|
| Article number | 2118.533-ACOT-35 |
| LED Consumption | 10W |
| Fixture Consumption | - |
| Current / Voltage | 800mA / 12Vdc |
| CRI | 90+ |
| CCT | 3000K |
| LED Lumen ^{*1} | 774lm |
| Delivered Lumen | - |
| Beam Angle available | 6° (Lens) |

Driver Technical Specification (Remoted)

| | | | |
|---------------------------------|---|--------------------------|---|
| Driver Brand | - | Driver Model | - |
| Input voltage / Frequency range | - | Output Current / Voltage | - |
| Dimming / Flicker | - | Certification | - |
| Power Factor | - | Warranty | - |

Technical character

| | | | |
|-----------------------|--------------|-------------------------|------------------------|
| Products Standard | IEC 60598-1 | Luminaire | Aluminum die cast |
| | IEC 62031 | Trim | Aluminum die cast |
| Insulation | CLASS II | Optics | PMMA Lens |
| Protection | IP44 | Heat sink | Forged aluminum |
| Tilt / Rotate | 0~30° / None | Fixture color available | white / black |
| Operating temperature | 0~35°C | Baffle | PC |
| Average Failure Time | | Baffle Color available | white / black / Chrome |

Accessories

Photometric

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-82
MR16 Accessory kitsACOT-83
GU10 Accessory kitsPJ-0079
MR16&GU10 Accessory

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.