

## Luminaire Photograph



Light Output Ratio:	80.0%	
Luminaire Power:	20.62 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-2-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMU1013-0000-000N0U0A30G Ra: 90  
LENS: PM-1083 15R  
DRIVER: 9290 028 089 500mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

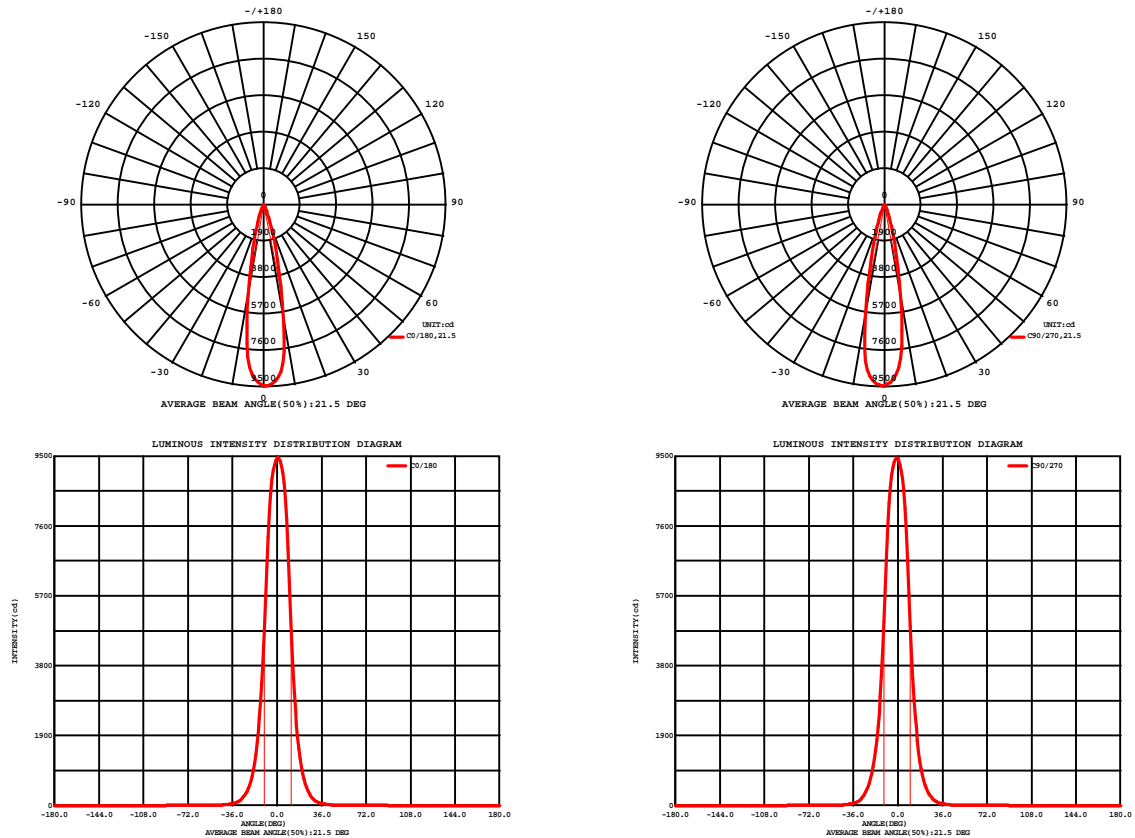


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-2-28

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMU1013-0000-000N0U0A30G Ra: 90  
LENS: PM-1083 15R  
DRIVER: 9290 028 089 500mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 79.48 lm/W			
MODEL	CREE	I <sub>max</sub> (cd)	9472	S/MH(C0/180)	0.34
NOMINAL POWER(W)	20	LOR(%)	80.0	S/MH(C90/270)	0.37
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1638.7	h UP,DN(C0-180)	0.0,38.7
NOMINAL FLUX(lm)	2048.03	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.0,41.3
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	h down(%)	80.0	CIBSE SHR MAX	1.00

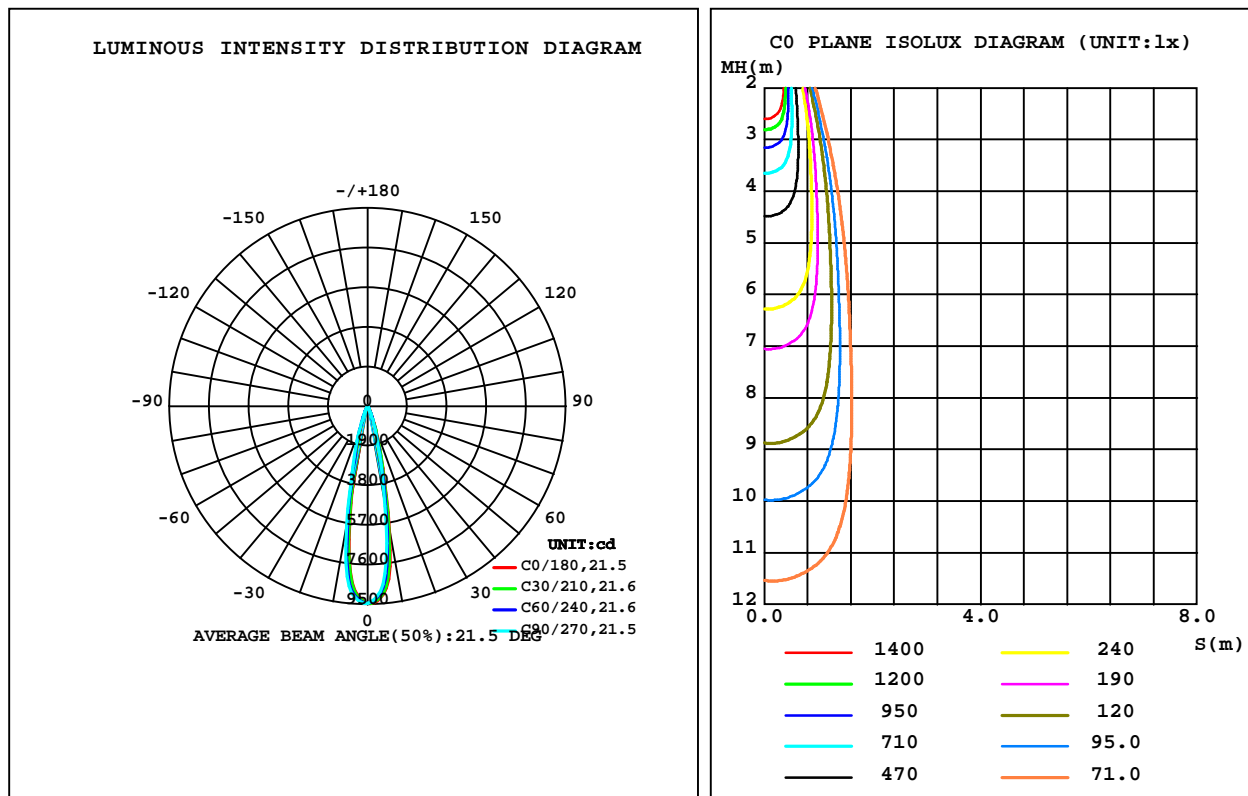

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up

### ZONAL FLUX DIAGRAM

#### ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	6097	5583	4885	4594	4716	5227	5890	6163	0- 10	729.6	729.6	44.5,35.6
20	1058	934.5	825.3	779.8	792.9	919.1	1046	1114	10- 20	667.1	1397	85.2,68.2
30	152.8	137.2	128.2	123.4	128.6	144.6	162.8	171.7	20- 30	185.9	1582	96.6,77.3
40	31.21	27.93	26.35	26.13	27.50	29.85	31.48	33.12	30- 40	42.88	1625	99.2,79.4
50	5.087	4.841	4.295	4.744	4.699	5.017	5.328	5.230	40- 50	10.81	1636	99.8,79.9
60	0.2633	0.1464	0.3479	0.3733	0.5428	0.5824	0.4960	0.6398	50- 60	2.230	1638	100,80
70	0.0513	0.0346	0.0314	0.1033	0.2136	0.1848	0.1710	0.0419	60- 70	0.2094	1639	100,80
80	0.0562	0.0283	0.0415	0.0263	0.0498	0.0296	0.0427	0.0250	70- 80	0.0558	1639	100,80
90	0	0	0	0	0	0	0	0	80- 90	0.0338	1639	100,80
100	0	0	0	0	0	0	0	0	90-100	0	1639	100,80
110	0	0	0	0	0	0	0	0	100-110	0	1639	100,80
120	0	0	0	0	0	0	0	0	110-120	0	1639	100,80
130	0	0	0	0	0	0	0	0	120-130	0	1639	100,80
140	0	0	0	0	0	0	0	0	130-140	0	1639	100,80
150	0	0	0	0	0	0	0	0	140-150	0	1639	100,80
160	0	0	0	0	0	0	0	0	150-160	0	1639	100,80
170	0	0	0	0	0	0	0	0	160-170	0	1639	100,80
180	0	0	0	0	0	0	0	0	170-180	0	1639	100,80
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up

## LUMINANCE LIMITATION CURVES

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

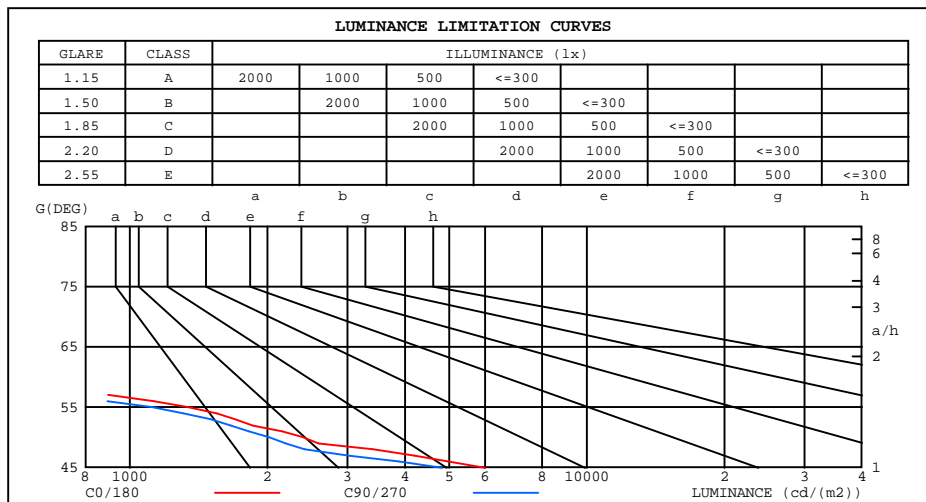


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

G Range: 0 - 180DEG  
G Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	.95	.95	.95	.93	.93	.93	.89	.89	.89	.85	.85	.85	.82	.82	.82	.80
1.0	.91	.89	.88	.89	.88	.87	.86	.85	.84	.83	.82	.81	.80	.80	.79	.78
2.0	.87	.85	.83	.86	.84	.82	.83	.81	.80	.81	.80	.78	.79	.78	.77	.76
3.0	.84	.81	.79	.82	.80	.78	.81	.79	.77	.79	.77	.76	.77	.76	.75	.74
4.0	.81	.78	.76	.80	.77	.75	.78	.76	.74	.77	.75	.73	.75	.74	.73	.72
5.0	.78	.75	.73	.77	.75	.73	.76	.74	.72	.75	.73	.71	.74	.72	.71	.70
6.0	.76	.73	.71	.75	.72	.70	.74	.72	.70	.73	.71	.69	.72	.70	.69	.68
7.0	.74	.71	.69	.73	.70	.68	.72	.70	.68	.72	.69	.68	.71	.69	.67	.67
8.0	.72	.69	.67	.71	.69	.67	.71	.68	.66	.70	.68	.66	.69	.67	.66	.65
9.0	.70	.67	.65	.70	.67	.65	.69	.67	.65	.69	.66	.65	.68	.66	.64	.64
10.0	.68	.65	.64	.68	.65	.63	.68	.65	.63	.67	.65	.63	.67	.65	.63	.62

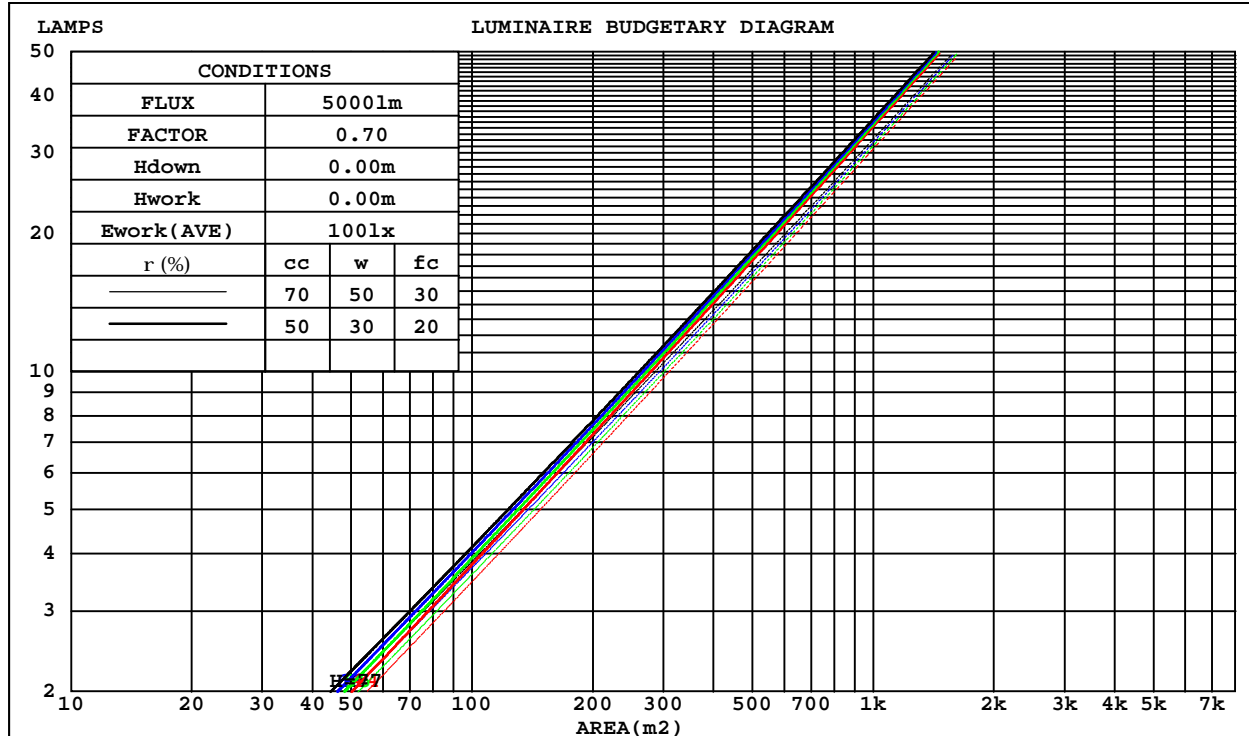

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up

### WEC AND CCEC

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.103	.058	.019	.098	.056	.018	.088	.050	.016	.079	.045	.015	.070	.041	.013	
2.0	.095	.052	.016	.090	.050	.015	.082	.046	.014	.075	.042	.013	.068	.038	.012	
3.0	.088	.047	.014	.084	.045	.014	.077	.042	.013	.071	.039	.012	.065	.036	.011	
4.0	.082	.043	.013	.079	.041	.012	.073	.039	.012	.068	.037	.011	.063	.034	.010	
5.0	.077	.039	.011	.074	.038	.011	.069	.036	.011	.065	.034	.010	.061	.033	.010	
6.0	.072	.036	.010	.070	.036	.010	.066	.034	.010	.062	.032	.010	.059	.031	.009	
7.0	.069	.034	.010	.067	.033	.009	.063	.032	.009	.060	.031	.009	.057	.029	.009	
8.0	.065	.032	.009	.064	.031	.009	.061	.030	.009	.058	.029	.008	.055	.028	.008	
9.0	.062	.030	.008	.061	.030	.008	.058	.029	.008	.056	.028	.008	.053	.027	.008	
10.0	.060	.029	.008	.058	.028	.008	.056	.027	.008	.054	.027	.008	.051	.026	.007	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.152	.152	.152	.130	.130	.130	.089	.089	.089	.051	.051	.051	.016	.016	.016	
1.0	.134	.126	.119	.115	.108	.102	.079	.075	.071	.045	.043	.041	.014	.014	.013	
2.0	.119	.106	.095	.102	.091	.082	.070	.063	.057	.040	.037	.034	.013	.012	.011	
3.0	.107	.091	.078	.092	.078	.067	.063	.054	.047	.036	.032	.028	.012	.010	.009	
4.0	.097	.078	.064	.083	.068	.056	.057	.047	.039	.033	.028	.023	.011	.009	.008	
5.0	.088	.068	.054	.075	.059	.047	.052	.041	.033	.030	.024	.020	.010	.008	.006	
6.0	.080	.060	.045	.069	.052	.040	.048	.036	.028	.028	.021	.017	.009	.007	.006	
7.0	.074	.053	.039	.064	.046	.034	.044	.032	.024	.026	.019	.014	.008	.006	.005	
8.0	.069	.048	.034	.059	.042	.029	.041	.029	.021	.024	.017	.012	.008	.006	.004	
9.0	.064	.043	.029	.055	.038	.026	.038	.026	.018	.022	.016	.011	.007	.005	.004	
10.0	.060	.039	.026	.052	.034	.022	.036	.024	.016	.021	.014	.010	.007	.005	.003	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm										
NAME: 2118.533-ACOT-37					TYPE:			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:2202280113		
MFR.: RISE					SUR.:0.003316625m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.5	8.1	7.7	8.3	8.4	6.8	7.4	7.0	7.6	7.7
3H	7.4	7.9	7.6	8.1	8.3	6.7	7.2	6.9	7.4	7.6
4H	7.3	7.8	7.6	8.0	8.2	6.6	7.1	6.9	7.3	7.5
6H	7.2	7.7	7.5	7.9	8.2	6.5	7.0	6.8	7.2	7.5
8H	7.2	7.7	7.5	7.9	8.2	6.5	7.0	6.8	7.2	7.4
12H	7.1	7.6	7.4	7.9	8.1	6.4	6.9	6.7	7.2	7.4
4H 2H	7.3	7.8	7.6	8.0	8.2	6.6	7.1	6.9	7.3	7.5
3H	7.1	7.6	7.4	7.9	8.1	6.4	6.9	6.7	7.2	7.4
4H	7.0	7.5	7.4	7.8	8.1	6.3	6.8	6.7	7.1	7.4
6H	6.9	7.3	7.3	7.6	8.0	6.2	6.6	6.6	6.9	7.3
8H	6.9	7.2	7.3	7.6	7.9	6.2	6.5	6.6	6.9	7.2
12H	6.8	7.2	7.2	7.5	7.9	6.1	6.5	6.5	6.8	7.2
8H 4H	6.9	7.2	7.3	7.6	7.9	6.2	6.5	6.6	6.9	7.2
6H	6.8	7.1	7.2	7.5	7.9	6.1	6.4	6.5	6.7	7.2
8H	6.7	7.0	7.1	7.4	7.8	6.0	6.3	6.4	6.7	7.1
12H	6.6	6.9	7.1	7.3	7.8	5.9	6.2	6.4	6.6	7.1
12H 4H	6.8	7.2	7.2	7.5	7.9	6.1	6.4	6.5	6.8	7.2
6H	6.7	7.0	7.1	7.4	7.8	6.0	6.3	6.4	6.7	7.1
8H	6.6	6.9	7.1	7.3	7.8	5.9	6.2	6.4	6.6	7.1
Variations with the observer position at spacings:										
S = 1.0H	+ 3.6 / -14.0					+ 3.2 / -16.7				
1.5H	+ 5.7 / - 9.8					+ 5.4 / -10.1				
2.0H	+ 7.3 / -19.1					+ 7.0 / -18.6				

CIE Pub.117, 2048 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 2.5$ )  
Area: 0.00331663 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up

### UTILIZATION FACTORS TABLE

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	73	68	66	72	68	66	72	68	65	63
0.80	78	74	72	78	74	72	77	74	71	69
1.00	81	77	75	81	77	75	80	77	74	71
1.25	84	81	78	83	80	78	82	79	77	74
1.50	86	83	80	85	82	80	84	81	79	76
2.00	88	85	83	87	84	82	85	83	81	77
2.50	89	86	84	88	85	83	85	83	82	77
3.00	90	88	86	89	87	85	86	84	83	78
4.00	92	90	88	90	88	87	87	86	85	79
5.00	93	91	90	91	90	88	88	87	86	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Zoe  
 Test Date:2022-2-28

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
 LENS:PM-1083 15R  
 DRIVER:9290 028 089 500mA  
 30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

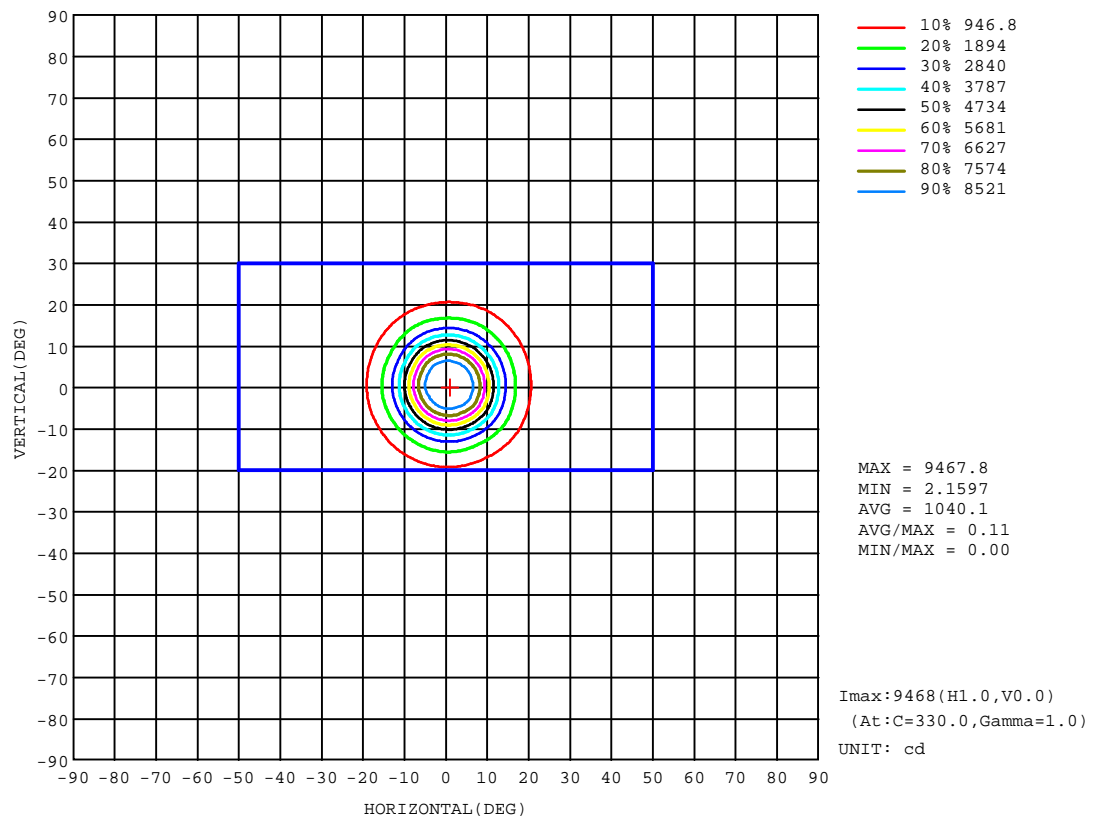


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up

## AAI Figure

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

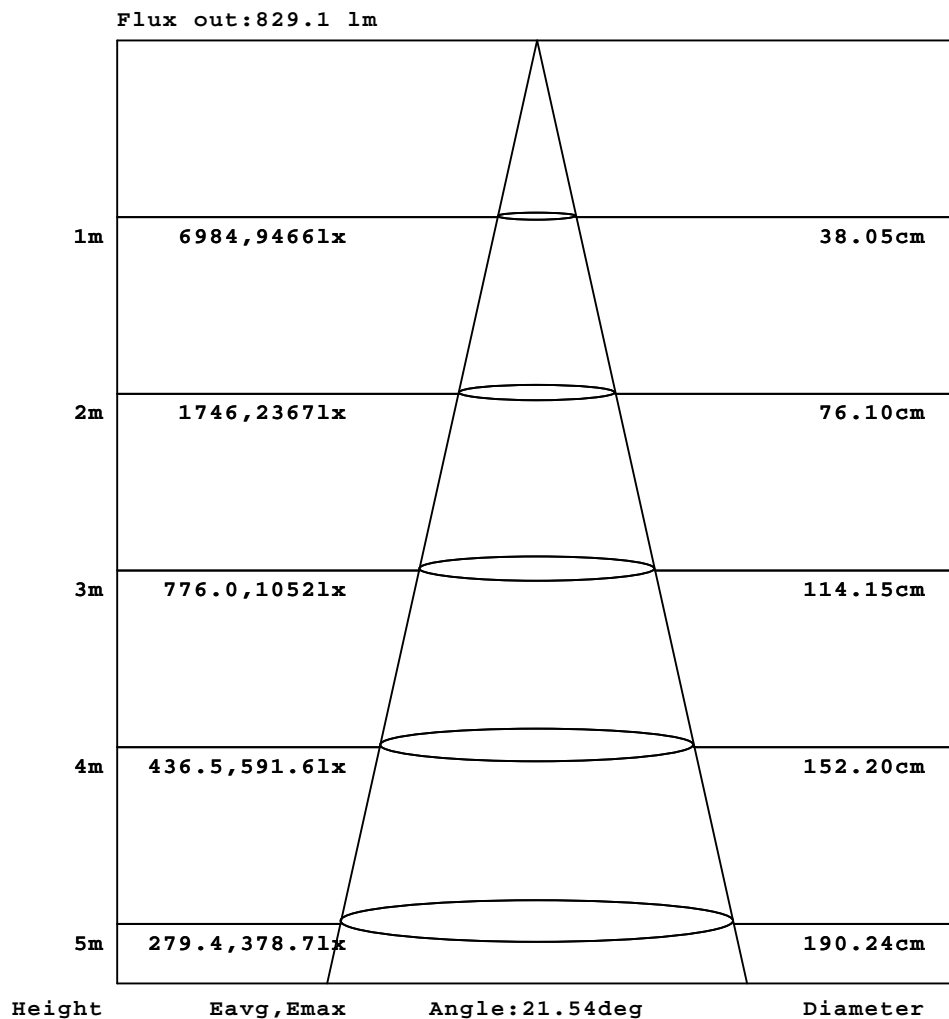


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-2-28

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMU1013-0000-000N0U0A30G Ra:90  
LENS: PM-1083 15R  
DRIVER: 9290 028 089 500mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

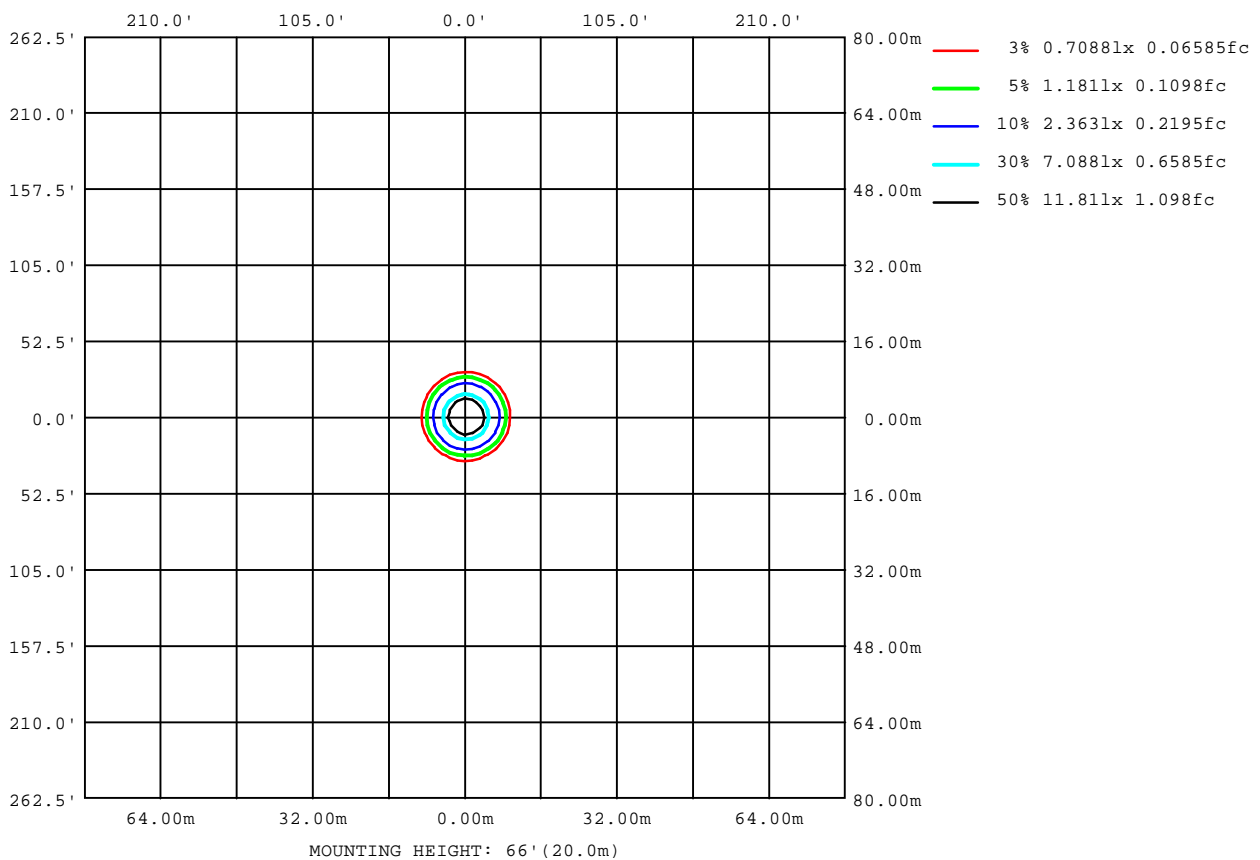

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up

## LED Avg.L Report

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	143
L_0~180(75)av	83
L_0~180(85)av	181
L_90~270(65)av	149
L_90~270(75)av	54
L_90~270(85)av	168
L_45(65)av	141
L_45(75)av	47
L_45(85)av	74

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up

## Planar Illuminance Curve

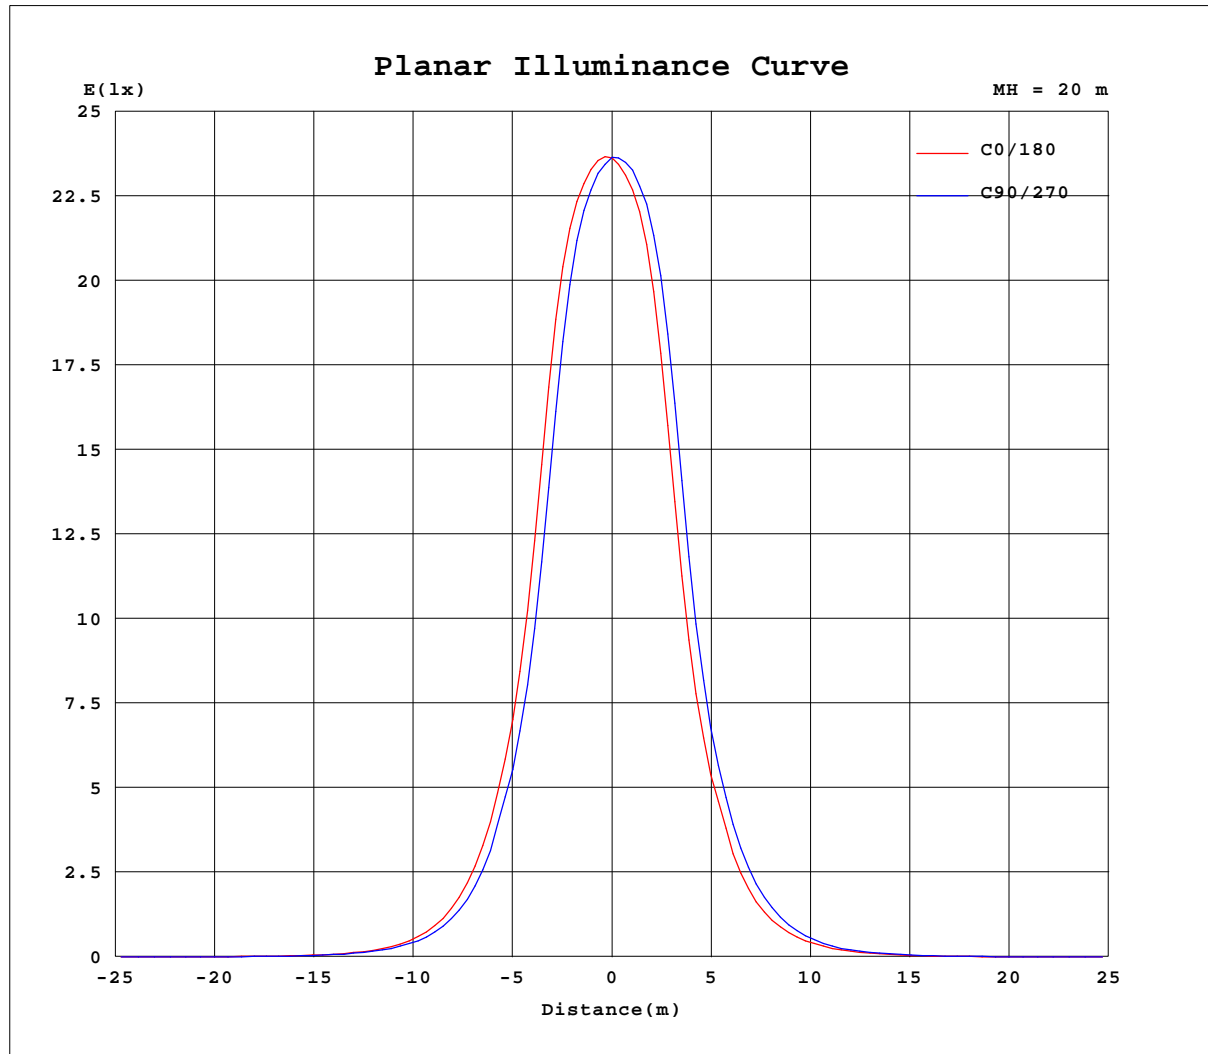

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Zoe  
 Test Date: 2022-2-28

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: CMU1013-0000-000N0U0A30G Ra:90  
 LENS: PM-1083 15R  
 DRIVER: 9290 028 089 500mA  
 30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.28V I:0.0967A P:20.618W PF:0.9657 Freq:49.99Hz Lamp Flux:2048.03x1 lm		
NAME: 2118.533-ACOT-37	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2202280113
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

Table--1

UNIT: cd

C(°) g (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	9443	9443	9443	9443	9443	9443	9443	9443	9443	9443	9443	9443						
5	9031	8970	8716	8560	8449	8411	8519	8607	8868	8994	9049	9063						
10	6097	5924	5242	4885	4649	4538	4716	4907	5546	5890	6131	6196						
15	2596	2499	2187	2100	1955	1943	2041	2084	2352	2515	2642	2668						
20	1058	1010	860	825	803	757	793	870	968	1046	1122	1105						
25	403	388	329	324	311	304	319	339	393	420	453	430						
30	153	144	130	128	124	122	129	136	153	163	176	167						
35	68.0	61.2	57.4	55.8	54.8	54.6	57.3	60.1	66.3	71.7	73.7	73.2						
40	31.2	28.8	27.1	26.3	26.0	26.3	27.5	29.0	30.7	31.5	33.3	33.0						
45	14.1	13.0	11.9	11.3	11.5	11.9	12.5	13.6	14.0	14.3	15.0	14.9						
50	5.09	5.34	4.34	4.29	4.68	4.81	4.70	4.93	5.10	5.33	5.40	5.06						
55	2.54	2.24	1.90	2.12	2.43	2.27	2.47	2.75	2.77	2.89	3.12	2.78						
60	0.26	0.20	0.09	0.35	0.41	0.34	0.54	0.62	0.54	0.50	0.80	0.48						
65	0.06	0.05	0.04	0.15	0.26	0.27	0.34	0.28	0.28	0.27	0.34	0.07						
70	0.05	0.04	0.03	0.03	0.09	0.12	0.21	0.20	0.17	0.17	0.05	0.04						
75	0.05	0.03	0.03	0.03	0.03	0.03	0.09	0.11	0.06	0.06	0.02	0.03						
80	0.06	0.03	0.03	0.04	0.03	0.03	0.05	0.03	0.02	0.04	0.02	0.03						
85	0.05	0.02	0.03	0.05	0.02	0.03	0.05	0.03	0.02	0.05	0.02	0.03						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-2-28

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMU1013-0000-000N0U0A30G Ra:90  
LENS:PM-1083 15R  
DRIVER:9290 028 089 500mA  
30minutes warm-up