






BRAVO-85-STA1

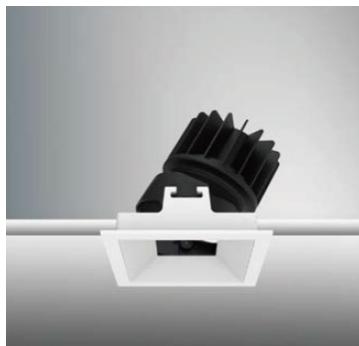

## Product specification

## INTERIOR RECESSED DOWNLIGHTS

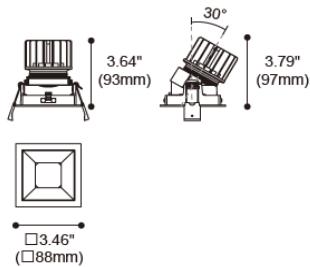

## Technical Specification


|                      |                  |
|----------------------|------------------|
| Article number       | 2118.552-ACOT-35 |
| LED Consumption      | 10W              |
| Fixture Consumption  | -                |
| Current / Voltage    | 800mA / 12Vdc    |
| CRI                  | 90+              |
| CCT                  | 3000K            |
| LED Lumen *1         | 774lm            |
| Delivered Lumen      | -                |
| Beam Angle available | 6° (Lens)        |

## Driver Technical Specification (Remoted)

|                                |   |                          |   |
|--------------------------------|---|--------------------------|---|
| Driver Brand                   | - | Driver Model             | - |
| Input voltage / Freqency range | - | Output Current / Voltage | - |
| Dimming / Flicker              | - | Certification            | - |
| Power Factor                   | - | Warranty                 | - |

| Technical character   |                   | Materials               |                   |
|-----------------------|-------------------|-------------------------|-------------------|
| Products Standard     | IEC 60598-1       | Luminaire               | Aluminum die cast |
|                       | IEC 62031         | Trim                    | Aluminum die cast |
| Insulation            | CLASS II          | Optics                  | PC Lens           |
| Protection            | IP44              | Heat sink               | Forged aluminum   |
| Tilt / Rotate         | 0~30° / Non       | Fixture color available | white / black     |
| Operating temperature | 0~35°C            | Baffle                  | Aluminum die cast |
| Average Failure Time  | L80(12k)>72600(h) | Baffle Color available  | white / black     |

## Accessories

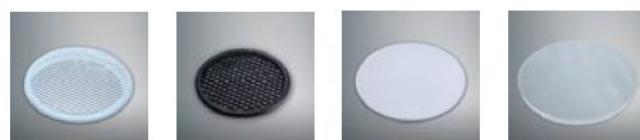SG7-1  
Striped glassH7-1  
Honeycomb louverDS7-1  
Diffusion sheetWG7-1  
Woven glass

## Photometric

ACOT-82  
MR16 Accessory kitsACOT-83  
GU10 Accessory kitsPJ-0079  
MR16&GU10 Accessory

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.