






BRAVO-85-STA1

Product specification

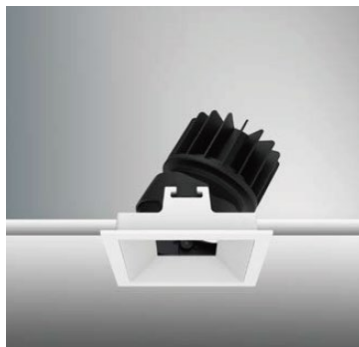

INTERIOR RECESSED DOWNLIGHTS



Technical Specification

Article number	2118.552-ACOT-36		
LED Consumption	14W		
Fixture Consumption	-		
Current / Voltage	350mA / 38.4Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	1139lm	1193lm	1282lm
Delivered Lumen	-	980lm	-
Beam Angle available	15°/24°/50° (Lens)		

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-


Technical character

Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	-	Baffle Color available	white / black


Accessories

SG7-1
Striped glassH7-1
Honeycomb louverDS7-1
Diffusion sheetWG7-1
Woven glassACOT-82
MR16 Accessory kitsACOT-83
GU10 Accessory kitsPJ-0079
MR16&GU10 Accessory


Photometric




h (m)	D (m)	E (lx)
15°		
1.0	0.25	10768
2.0	0.49	2692
3.0	0.74	1196
4.0	0.98	673
5.0	1.23	430



h (m)	D (m)	E (lx)
24°		
1.0	0.45	5046
2.0	0.89	1261
3.0	1.34	560
4.0	1.78	315
5.0	2.23	201



h (m)	D (m)	E (lx)
36°		
1.0	0.64	2754
2.0	1.30	688
3.0	1.94	306
4.0	2.59	172
5.0	3.24	110



h (m)	D (m)	E (lx)
50°		
1.0	0.89	1545
2.0	1.79	386
3.0	2.68	171
4.0	3.58	96
5.0	4.47	61

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.