


Luminaire Photograph

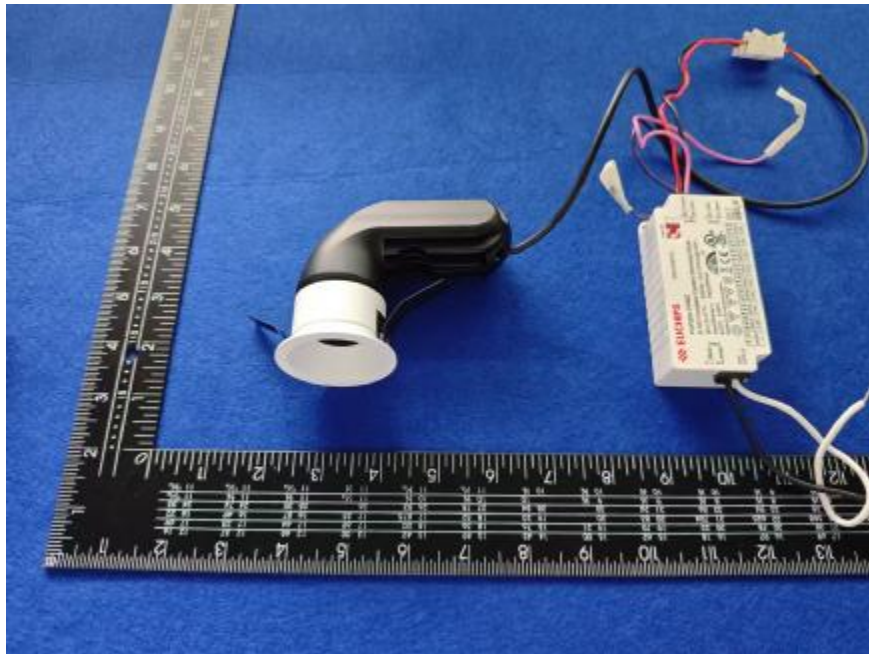

Light Output Ratio:	76.9%	
Luminaire Power:	13.7 W	
SHR Nominal:	0.50	Calculated using the TM5
SHR Maximum:	0.65	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3 °C
Operators: zoe
Test Date: 2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G10T0-G-83 Ra:90
LENS: PM-1084B 36R
DRIVER: PUP20A-1WMC 600mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

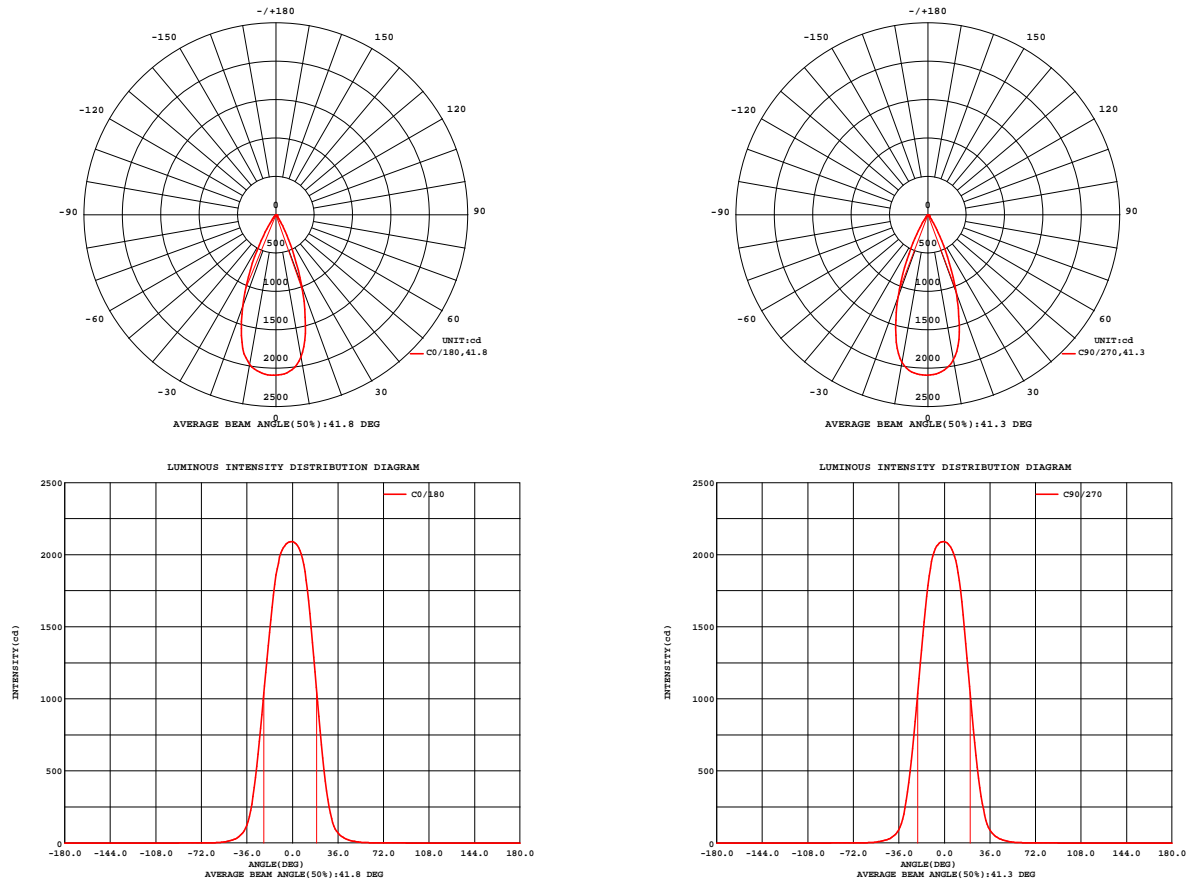


Fig. C0/C180

Fig. C90/C270

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2025-7-03


Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRH-30G10T0-G-83 Ra: 90
 LENS: PM-1084B 36R
 DRIVER: PUP20A-1WMC 600mA

30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030417
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 75.36 lm/W			
MODEL	Brideglux	I _{max} (cd)	2091	S/MH(C0/180)	0.69
NOMINAL POWER(W)	13	LOR(%)	76.9	S/MH(C90/270)	0.65
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1032.5	UP,DN(C0-180)	0.0,37.2
NOMINAL FLUX(lm)	1342.44	CIE CLASS	DIRECT	UP,DN(C180-360)	0.0,39.7
LAMPS INSIDE	1	up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	120	down(%)	76.9	CIBSE SHR MAX	0.65

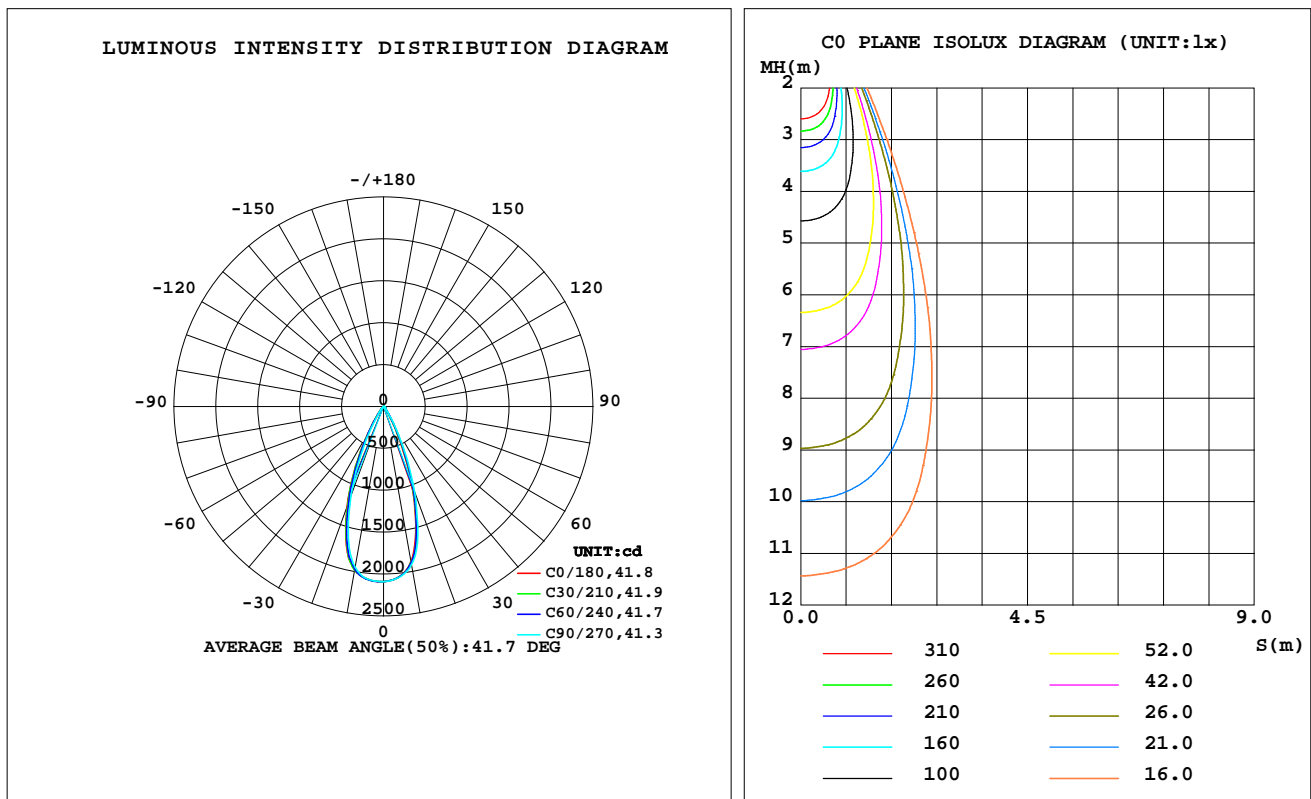

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

	C0	C45	C90	C135	C180	C225	C270	C315		zone	total	%lum,lamp
10	1881	1892	1918	1950	1983	1981	1953	1908	0- 10	192.9	192.9	18.7,14.4
20	977.2	1018	1086	1180	1276	1244	1139	1029	10- 20	434.0	626.9	60.7,46.7
30	206.8	231.4	271.6	334.4	385.5	369.8	294.3	242.6	20- 30	295.7	922.6	89.4,68.7
40	39.98	42.28	50.71	59.87	62.28	58.16	49.32	43.37	30- 40	81.40	1004	97.2,74.8
50	9.864	10.60	12.11	13.81	13.92	13.53	12.39	10.67	40- 50	20.21	1024	99.2,76.3
60	2.327	2.348	2.369	2.409	2.427	2.355	2.292	2.278	50- 60	5.176	1029	99.7,76.7
70	1.339	1.357	1.403	1.432	1.447	1.414	1.379	1.339	60- 70	1.817	1031	99.9,76.8
80	0.5135	0.5143	0.5566	0.5838	0.6131	0.5894	0.5638	0.5181	70- 80	0.9998	1032	100,76.9
90	0	0	0	0	0	0	0	0	80- 90	0.2754	1032	100,76.9
100	0	0	0	0	0	0	0	0	90-100	0	1032	100,76.9
110	0	0	0	0	0	0	0	0	100-110	0	1032	100,76.9
120	0	0	0	0	0	0	0	0	110-120	0	1032	100,76.9
130	0	0	0	0	0	0	0	0	120-130	0	1032	100,76.9
140	0	0	0	0	0	0	0	0	130-140	0	1032	100,76.9
150	0	0	0	0	0	0	0	0	140-150	0	1032	100,76.9
160	0	0	0	0	0	0	0	0	150-160	0	1032	100,76.9
170	0	0	0	0	0	0	0	0	160-170	0	1032	100,76.9
180	0	0	0	0	0	0	0	0	170-180	0	1032	100,76.9
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz
Lamp Flux:1342.44x1 lm

NAME: 2118.564-LEA-28-H0

TYPE:

WEIGHT:

SPEC.: 3000K


DIM.:

SERIAL No.: 2507030417

MFR.: RISE

SUR.: 0.001256m2

Shielding Angle:

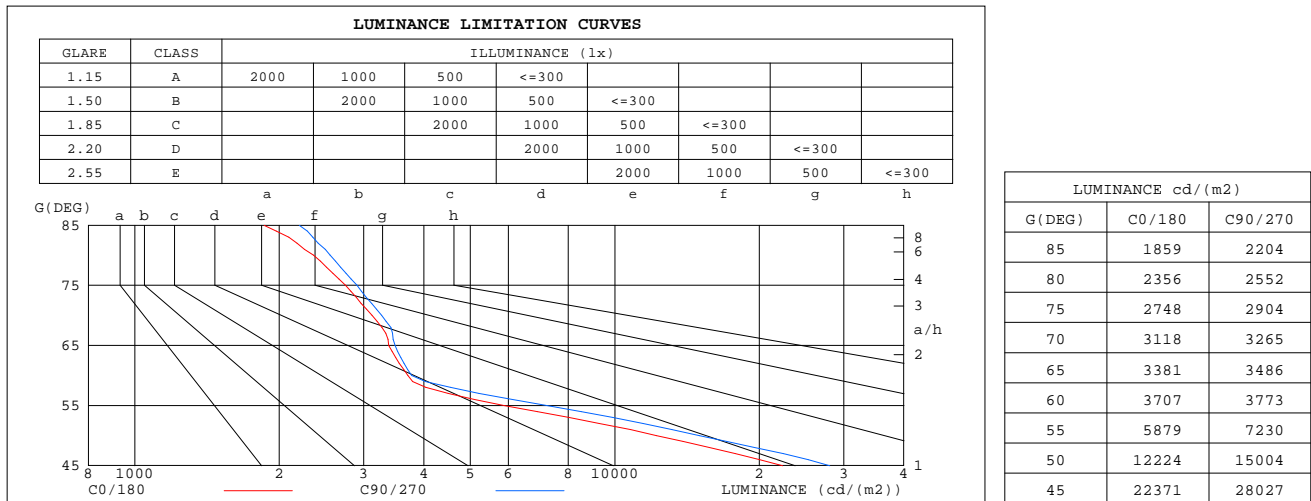

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03


Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030417
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

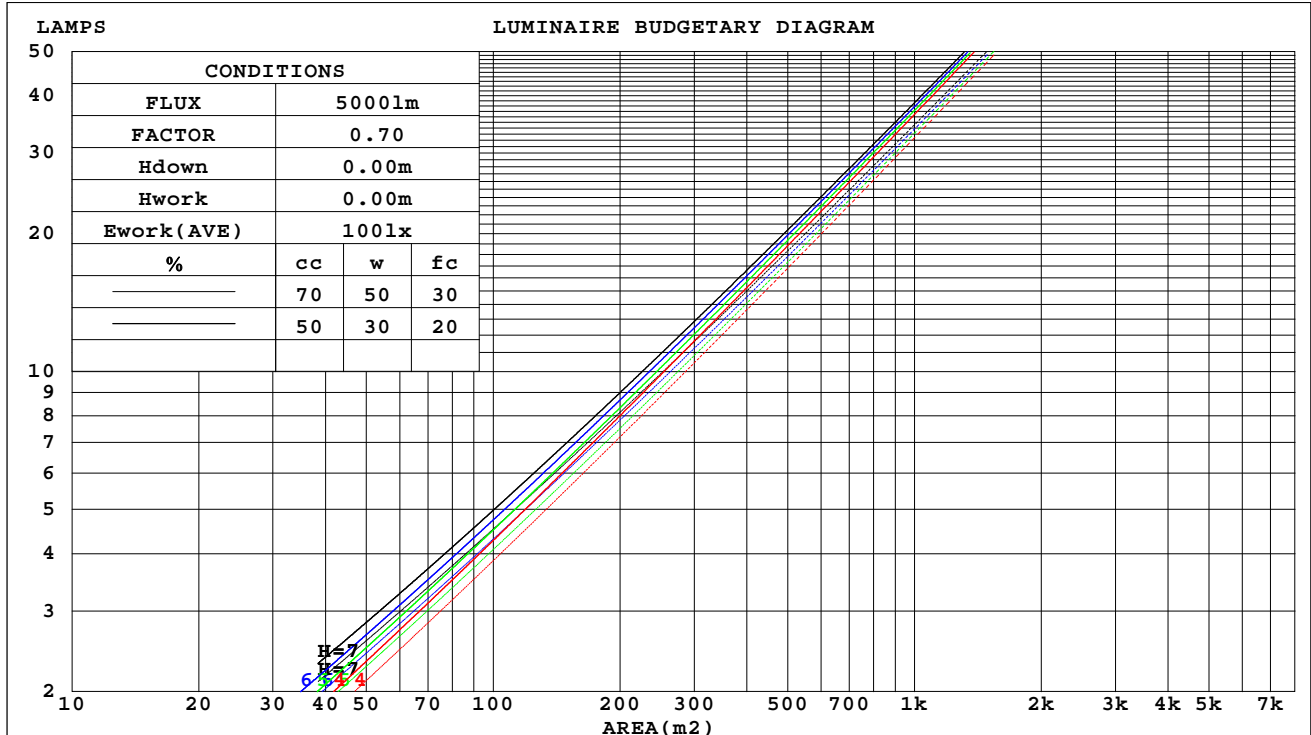

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

WEC AND CCEC

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030417
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.120	.068	.022	.115	.065	.021	.105	.060	.019	.096	.056	.018	.088	.051	.016	
2.0	.113	.062	.019	.109	.060	.018	.101	.056	.017	.093	.052	.016	.086	.049	.015	
3.0	.107	.057	.017	.103	.055	.017	.096	.052	.016	.090	.049	.015	.084	.047	.014	
4.0	.101	.052	.015	.098	.051	.015	.092	.049	.015	.087	.047	.014	.082	.044	.014	
5.0	.096	.049	.014	.093	.048	.014	.088	.046	.014	.084	.044	.013	.079	.042	.013	
6.0	.091	.046	.013	.089	.045	.013	.085	.043	.013	.081	.042	.012	.077	.040	.012	
7.0	.087	.043	.012	.085	.042	.012	.081	.041	.012	.078	.040	.012	.074	.039	.011	
8.0	.083	.041	.011	.082	.040	.011	.078	.039	.011	.075	.038	.011	.072	.037	.011	
9.0	.080	.039	.011	.078	.038	.011	.075	.037	.011	.073	.036	.010	.070	.036	.010	
10.0	.077	.037	.010	.075	.036	.010	.073	.036	.010	.070	.035	.010	.068	.034	.010	

cc	80%			70%			50%			30%			10%			0
w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients(CCEC)															
0.0	.146	.146	.146	.125	.125	.125	.085	.085	.085	.049	.049	.049	.016	.016	.016	
1.0	.130	.121	.113	.112	.104	.097	.076	.072	.067	.044	.041	.039	.014	.013	.013	
2.0	.118	.102	.089	.101	.088	.077	.069	.061	.054	.040	.035	.031	.013	.011	.010	
3.0	.107	.087	.071	.092	.075	.062	.063	.052	.043	.036	.031	.026	.012	.010	.008	
4.0	.098	.076	.058	.084	.065	.051	.058	.046	.036	.034	.027	.021	.011	.009	.007	
5.0	.091	.066	.048	.078	.057	.042	.054	.040	.030	.031	.024	.018	.010	.008	.006	
6.0	.085	.059	.041	.073	.051	.035	.050	.036	.025	.029	.021	.015	.009	.007	.005	
7.0	.079	.053	.035	.068	.046	.030	.047	.032	.021	.027	.019	.013	.009	.006	.004	
8.0	.075	.048	.030	.064	.042	.026	.044	.029	.018	.026	.017	.011	.008	.006	.004	
9.0	.071	.044	.026	.061	.038	.022	.042	.027	.016	.025	.016	.010	.008	.005	.003	
10.0	.067	.040	.023	.058	.035	.020	.040	.025	.014	.023	.015	.008	.008	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm										
NAME: 2118.564-LEA-28-H0					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.: 2507030417		
MFR.: RISE					SUR.: 0.001256m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	13.9	14.7	14.1	14.8	15.0	15.0	15.8	15.3	16.0	16.1
3H	13.8	14.5	14.0	14.7	14.9	14.9	15.7	15.2	15.8	16.0
4H	13.7	14.4	14.0	14.6	14.8	14.9	15.6	15.1	15.8	16.0
6H	13.7	14.3	13.9	14.5	14.8	14.8	15.5	15.1	15.7	15.9
8H	13.6	14.2	13.9	14.5	14.8	14.8	15.4	15.1	15.6	15.9
12H	13.6	14.2	13.9	14.4	14.7	14.7	15.3	15.0	15.6	15.9
4H 2H	13.7	14.4	13.9	14.6	14.8	14.8	15.5	15.1	15.7	15.9
3H	13.6	14.2	13.9	14.4	14.7	14.7	15.3	15.0	15.6	15.9
4H	13.5	14.1	13.9	14.4	14.7	14.7	15.2	15.0	15.5	15.8
6H	13.5	14.0	13.9	14.3	14.6	14.6	15.1	15.0	15.4	15.8
8H	13.4	13.9	13.8	14.2	14.6	14.6	15.0	14.9	15.4	15.7
12H	13.4	13.8	13.8	14.2	14.6	14.5	14.9	14.9	15.3	15.7
8H 4H	13.4	13.9	13.8	14.2	14.6	14.5	15.0	14.9	15.3	15.7
6H	13.4	13.7	13.8	14.1	14.5	14.5	14.8	14.9	15.2	15.6
8H	13.3	13.7	13.8	14.1	14.5	14.4	14.8	14.9	15.2	15.6
12H	13.3	13.6	13.8	14.0	14.5	14.4	14.7	14.9	15.1	15.6
12H 4H	13.4	13.8	13.8	14.1	14.5	14.5	14.9	14.9	15.3	15.6
6H	13.3	13.6	13.8	14.1	14.5	14.4	14.7	14.9	15.2	15.6
8H	13.3	13.6	13.8	14.0	14.5	14.4	14.7	14.9	15.1	15.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.8 / - 6.2					+ 3.5 / - 6.8				
1.5H	+ 4.5 / - 5.6					+ 5.3 / - 6.4				
2.0H	+ 4.8 / - 3.6					+ 5.6 / - 4.2				

CIE Pub.117, 1342 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 1.0)
Area: 0.001256 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030417
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	69	65	62	69	64	62	68	64	62	59
0.80	75	70	68	74	70	68	73	70	67	65
1.00	78	74	71	77	73	71	76	73	70	68
1.25	80	77	74	80	76	74	78	75	73	70
1.50	82	79	77	81	78	76	80	77	75	72
2.00	84	81	79	83	80	78	81	79	77	73
2.50	85	83	80	84	82	80	82	80	78	74
3.00	86	84	82	85	83	81	83	81	80	75
4.00	88	86	84	86	85	83	84	82	81	76
5.00	89	87	86	87	86	85	84	83	82	77
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030417
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

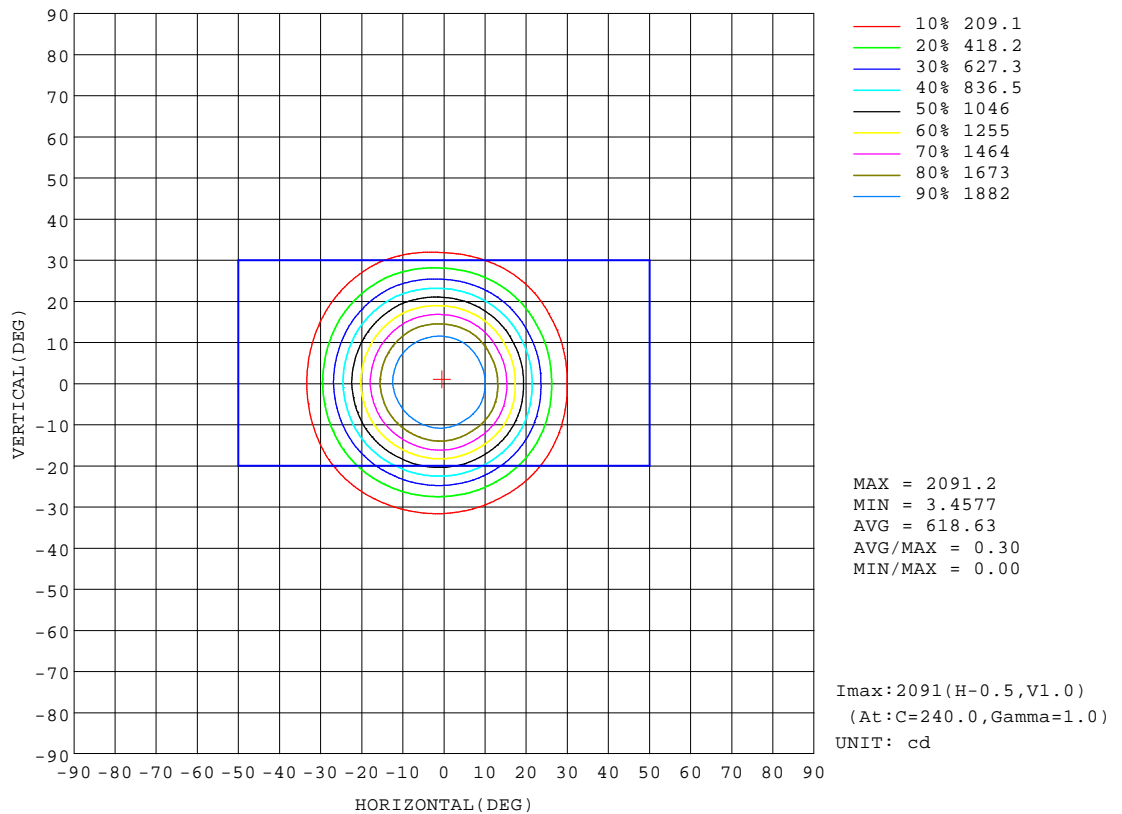


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

AAI Figure

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030417
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

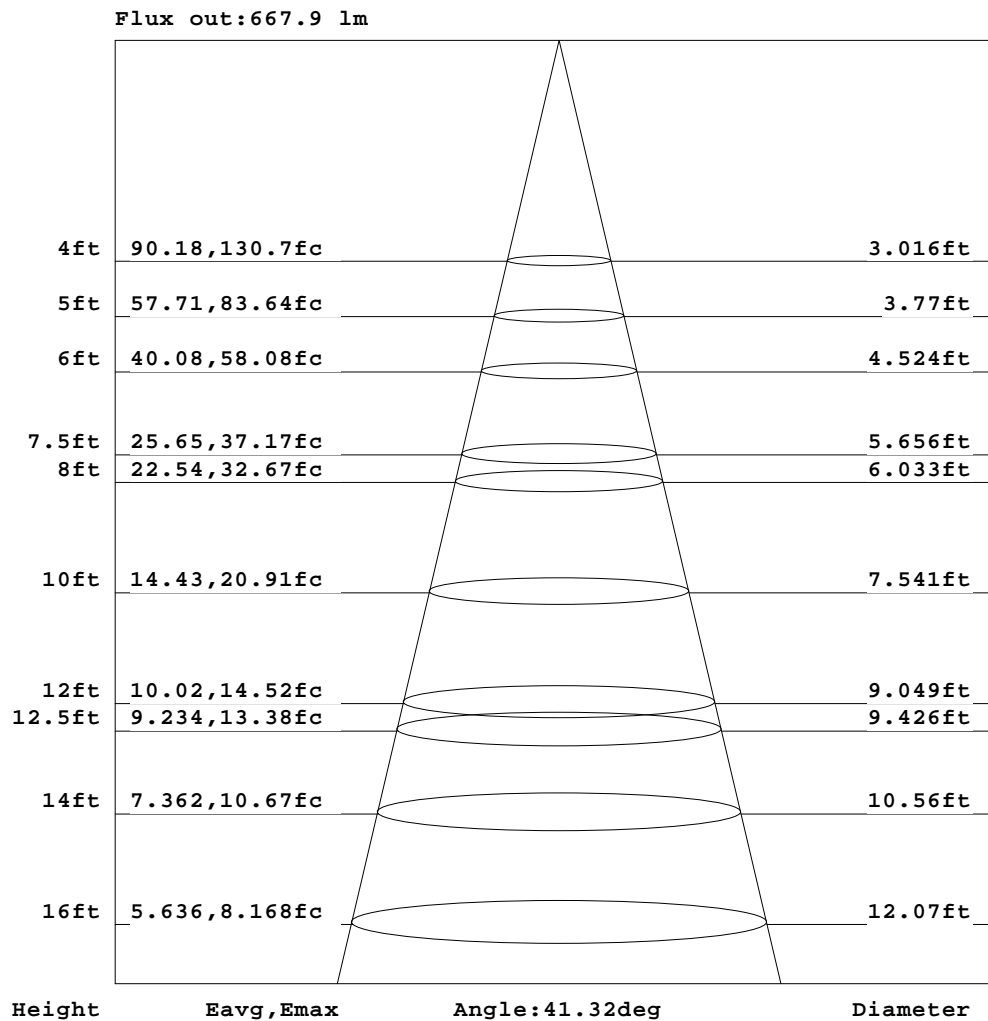

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: zoe
Test Date: 2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: BXRH-30G10T0-G-83 Ra: 90
LENS: PM-1084B 36R
DRIVER: PUP20A-1WMC 600mA

30minutes warm-up

ISOLUX DIAGRAM

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030417
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

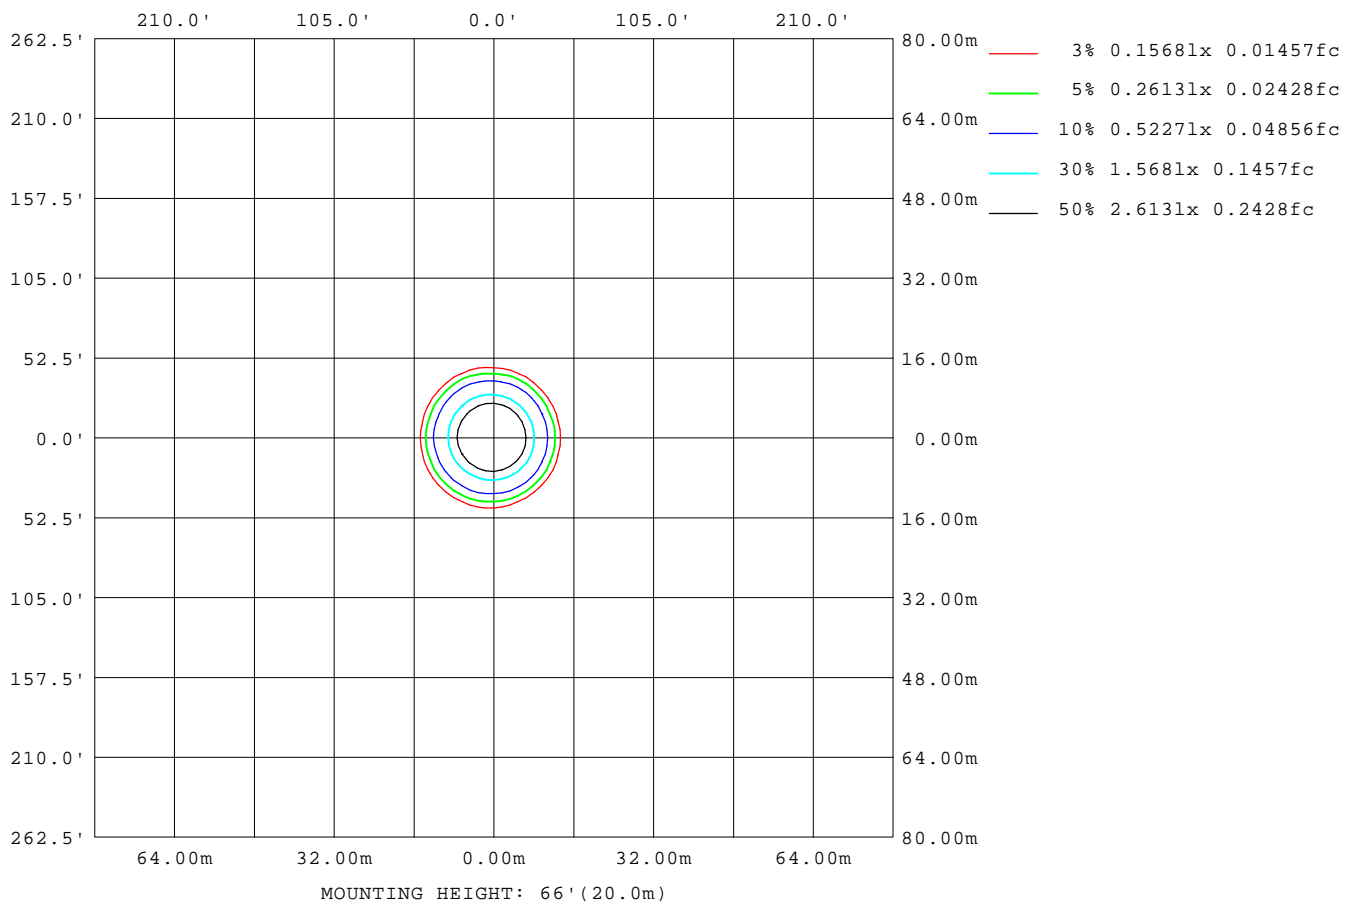

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up

LED Avg.L Report

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030417
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	3426
L_0~180(75)av	2904
L_0~180(85)av	2294
L_90~270(65)av	3426
L_90~270(75)av	2894
L_90~270(85)av	2266
L_45(65)av	3420
L_45(75)av	2868
L_45(85)av	2150

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA
30minutes warm-up

Planar Illuminance Curve

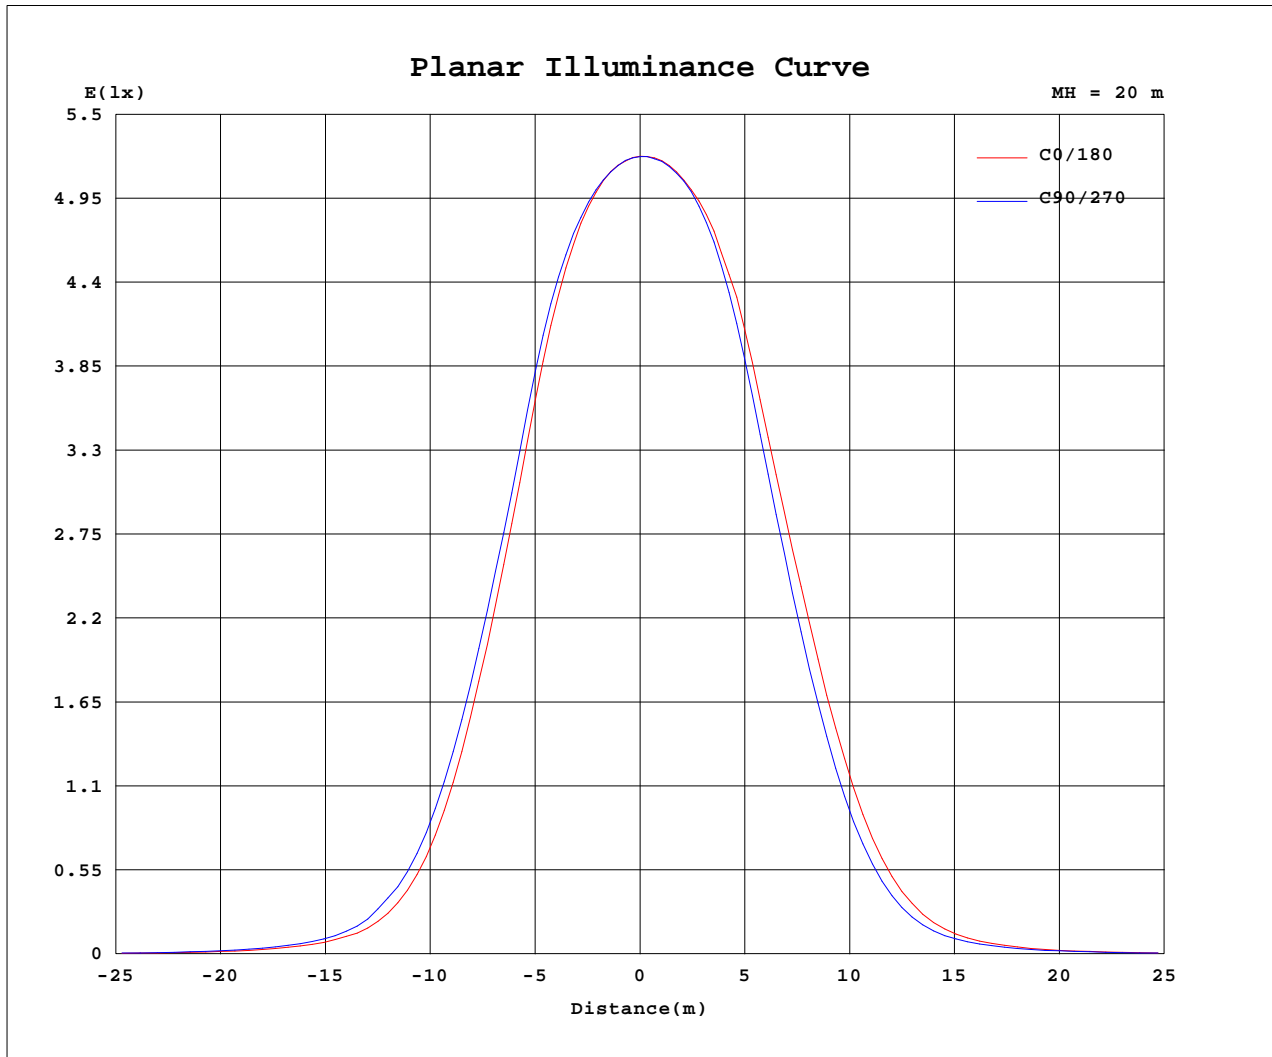

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators: zoe
 Test Date: 2025-7-03

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: BXRH-30G10T0-G-83 Ra:90
 LENS: PM-1084B 36R
 DRIVER: PUP20A-1WMC 600mA

30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.20V I:0.1149A P:13.700W PF:0.9908 Freq:59.98Hz Lamp Flux:1342.44x1 lm		
NAME: 2118.564-LEA-28-H0	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2507030417
MFR.: RISE	SUR.: 0.001256m2	Shielding Angle:

Table--1

UNIT: cd

C(DEG) (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2090	2090	2090	2090	2090	2090	2090	2090	2090	2090	2090	2090						
5	2049	2049	2049	2052	2056	2065	2073	2074	2075	2069	2066	2055						
10	1881	1889	1895	1918	1938	1963	1983	1985	1977	1953	1925	1892						
15	1491	1523	1525	1581	1621	1680	1719	1706	1685	1623	1576	1503						
20	977	1009	1027	1086	1138	1223	1276	1261	1226	1139	1065	994						
25	505	537	560	607	660	741	795	787	747	653	593	527						
30	207	225	238	272	311	357	385	381	359	294	266	220						
35	84.2	86.0	91.5	108	127	145	151	147	138	111	97.8	87.6						
40	40.0	40.8	43.7	50.7	57.6	62.2	62.3	59.8	56.5	49.3	45.5	41.2						
45	19.9	20.6	21.7	24.9	27.0	28.3	27.8	26.8	26.1	23.8	22.4	20.6						
50	9.86	10.3	10.9	12.1	13.4	14.2	13.9	13.5	13.5	12.4	11.3	10.0						
55	4.23	4.44	4.64	5.21	5.62	6.09	6.04	5.69	5.62	5.25	4.47	4.20						
60	2.33	2.35	2.35	2.37	2.38	2.44	2.43	2.36	2.35	2.29	2.27	2.29						
65	1.79	1.81	1.82	1.85	1.85	1.86	1.84	1.82	1.81	1.79	1.78	1.77						
70	1.34	1.35	1.37	1.40	1.42	1.44	1.45	1.42	1.41	1.38	1.35	1.33						
75	0.89	0.90	0.91	0.94	0.96	0.98	0.99	0.97	0.96	0.94	0.91	0.88						
80	0.51	0.51	0.52	0.56	0.57	0.60	0.61	0.59	0.59	0.56	0.53	0.50						
85	0.20	0.20	0.21	0.24	0.25	0.28	0.30	0.28	0.27	0.26	0.22	0.20						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:zoe
Test Date:2025-7-03

Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.461
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:BXRH-30G10T0-G-83 Ra:90
LENS:PM-1084B 36R
DRIVER:PUP20A-1WMC 600mA

30minutes warm-up