




STAR-50-RTA1



## Product specification

## INTERIOR RECESSED DOWNLIGHTS

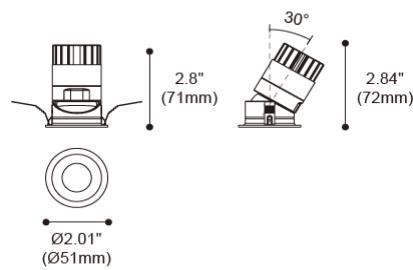

45

## Technical Specification

Article number	2118.565-ACOT-96		
LED Consumption	7W		
Fixture Consumption	-		
Current / Voltage	350mA / 17.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen <sup>1</sup>	618lm	656lm	716lm
Delivered Lumen	-	525lm	-
Beam Angle available	20°/25°/35°/40° (Lens)		

## Driver Technical Specification (Remoted)


Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(11k) >61000(h)	Baffle Color available	white / black

## Accessories

ACHO-18  
honeycomb louver  
+PC sheetSG-002  
Striped Glass

## Photometric



h(m)	D(m)	E(lx)
25°		
1.0	0.46	2309
2.0	0.93	577
3.0	1.40	256
4.0	1.86	144
5.0	2.33	92

## Remarks

<sup>1</sup>1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.