




STAR-50-RTA2



## Product specification

## INTERIOR RECESSED DOWNLIGHTS

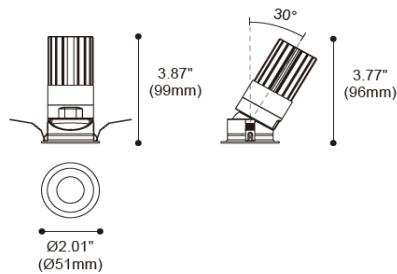

45

## Technical Specification

Article number 2118.565-ACOT-97

LED Consumption 10W

Fixture Consumption -

Current / Voltage 250mA / 36.5Vdc

CRI 90+

CCT 2700K 3000K 4000K

LED Lumen <sup>1</sup> 871lm 913lm 981lm

Delivered Lumen - 642lm -

Beam Angle available 20°/25°/35°/40° (Lens)

## Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

## Technical character


## Materials

Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / Non	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time		Baffle Color available	white / black

## Accessories

ACHO-18  
honeycomb louver  
+PC sheetSG-002  
Striped Glass

## Photometric



h(m)	D(m)	E(lx)
35°		
1.0	0.66	1566
2.0	1.31	391
3.0	1.97	174
4.0	2.62	97
5.0	3.28	62

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.