

## Luminaire Photograph



Light Output Ratio:	86.8%	
Luminaire Power:	13.58 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-7-19

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90  
LENS: PM-1083 15R  
DRIVER: PUP10T-1LMC-350 250mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

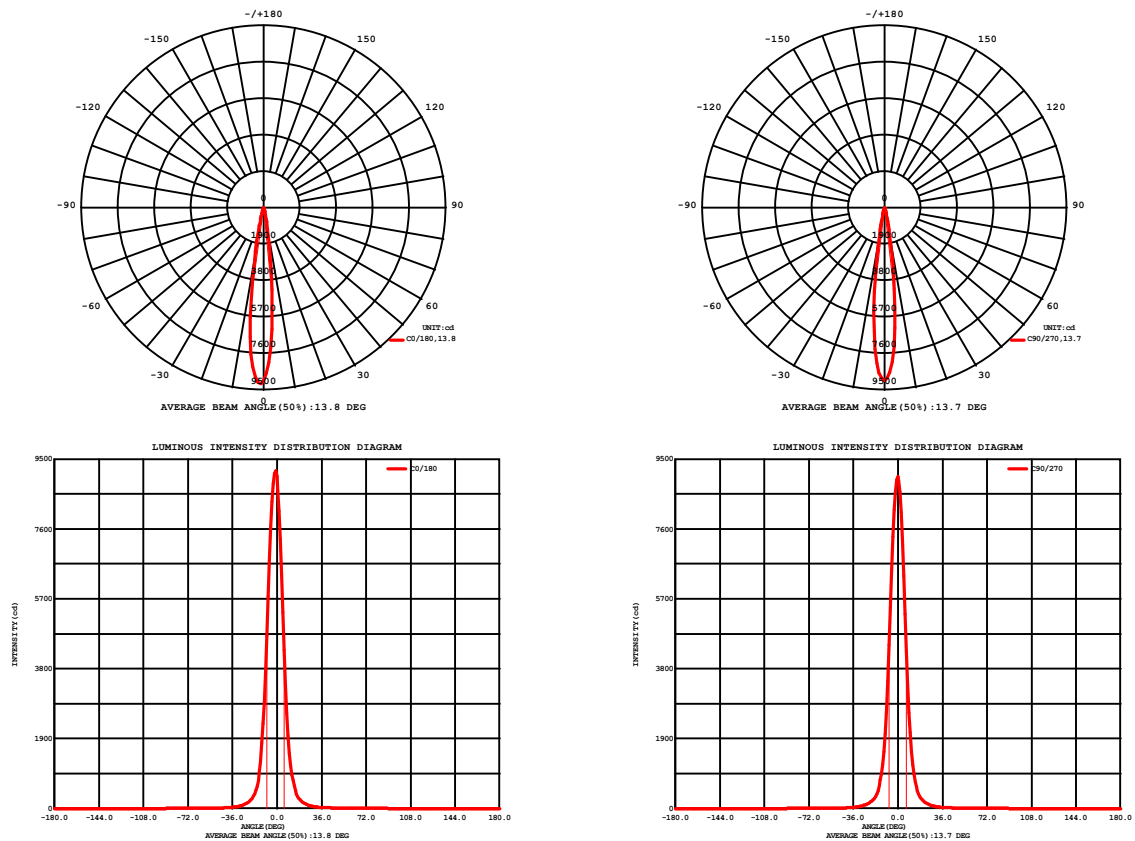


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-7-19

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90  
LENS: PM-1083 15R  
DRIVER: PUP10T-1LMC-350 250mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190581
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 55.80 lm/W			
MODEL	CREE	I <sub>max</sub> (cd)	9181	S/MH (C0/180)	0.27
NOMINAL POWER (W)	13	LOR (%)	86.8	S/MH (C90/270)	0.24
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	757.93	h UP,DN (C0-180)	0.0,41.5
NOMINAL FLUX (lm)	873.09	CIE CLASS	DIRECT	h UP,DN (C180-360)	0.0,45.3
LAMPS INSIDE	1	h up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	120	h down (%)	86.8	CIBSE SHR MAX	1.00

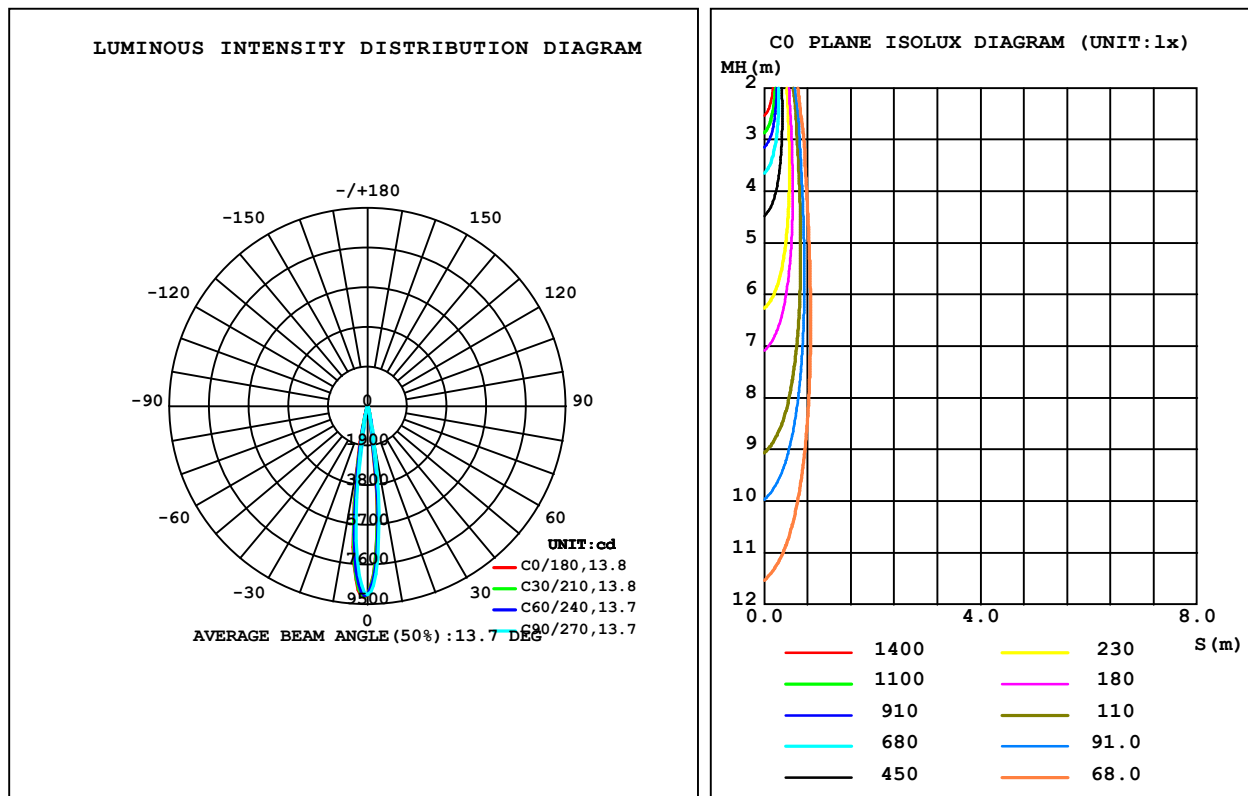

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083 15R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

### ZONAL FLUX DIAGRAM

#### ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	1511	1718	2068	2486	2838	2648	2025	1778	0- 10	460.7	460.7	60.8,52.8
20	197.5	212.3	240.4	258.0	276.9	265.4	235.0	215.4	10- 20	198.8	659.5	87,75.5
30	51.59	53.91	57.86	62.16	65.60	65.19	59.55	54.79	20- 30	55.35	714.8	94.3,81.9
40	21.25	21.89	22.20	22.18	21.95	21.52	20.85	21.02	30- 40	22.26	737.1	97.3,84.4
50	10.77	11.56	11.43	10.57	9.065	8.069	8.323	9.793	40- 50	11.55	748.7	98.8,85.7
60	3.877	4.753	4.713	3.437	2.504	2.300	2.397	2.936	50- 60	5.615	754.3	99.5,86.4
70	1.672	1.980	2.195	1.655	0.9806	0.7669	0.8132	1.174	60- 70	2.185	756.5	99.8,86.6
80	0.9213	1.111	1.064	0.7617	0.5047	0.3921	0.4083	0.6037	70- 80	1.053	757.5	99.9,86.8
90	0	0	0	0	0	0	0	0	80- 90	0.4204	757.9	100,86.8
100	0	0	0	0	0	0	0	0	90-100	0	757.9	100,86.8
110	0	0	0	0	0	0	0	0	100-110	0	757.9	100,86.8
120	0	0	0	0	0	0	0	0	110-120	0	757.9	100,86.8
130	0	0	0	0	0	0	0	0	120-130	0	757.9	100,86.8
140	0	0	0	0	0	0	0	0	130-140	0	757.9	100,86.8
150	0	0	0	0	0	0	0	0	140-150	0	757.9	100,86.8
160	0	0	0	0	0	0	0	0	150-160	0	757.9	100,86.8
170	0	0	0	0	0	0	0	0	160-170	0	757.9	100,86.8
180	0	0	0	0	0	0	0	0	170-180	0	757.9	100,86.8
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083 15R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## LUMINANCE LIMITATION CURVES

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190581
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

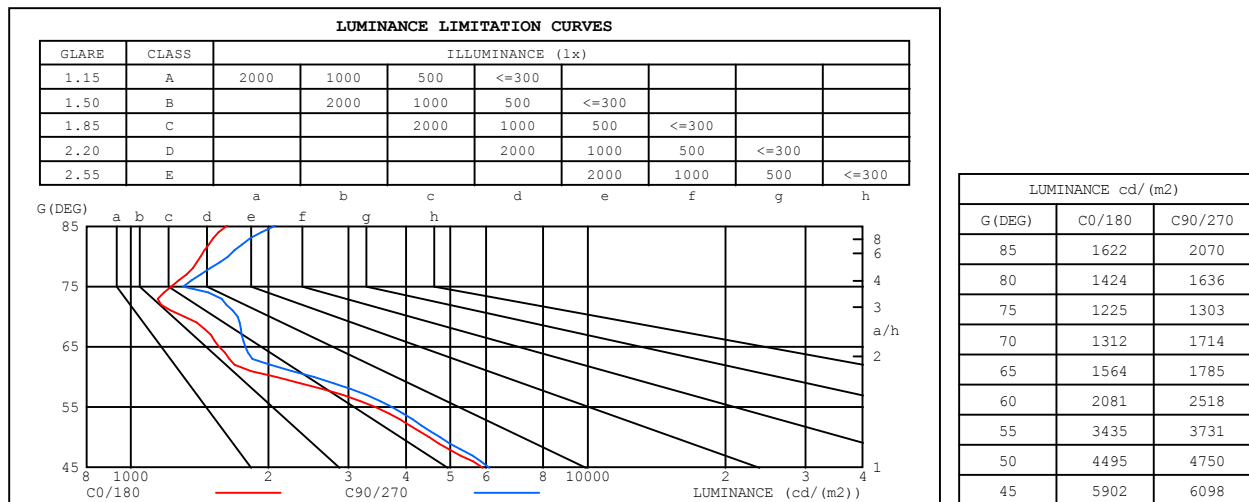


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

G Range: 0 - 180DEG  
G Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083 15R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190581
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.03	1.03	1.03	1.01	1.01	1.01	.96	.96	.96	.92	.92	.92	.89	.89	.89	.87
1.0	.99	.97	.96	.97	.95	.94	.93	.92	.91	.90	.89	.89	.87	.87	.86	.85
2.0	.95	.92	.91	.93	.91	.90	.91	.89	.88	.88	.87	.86	.86	.85	.84	.83
3.0	.91	.89	.87	.90	.88	.86	.88	.86	.85	.86	.85	.83	.85	.83	.82	.81
4.0	.89	.86	.83	.88	.85	.83	.86	.84	.82	.85	.83	.81	.83	.82	.80	.79
5.0	.86	.83	.81	.86	.83	.81	.84	.82	.80	.83	.81	.79	.82	.80	.79	.78
6.0	.84	.81	.79	.84	.81	.79	.83	.80	.78	.82	.79	.78	.81	.79	.77	.77
7.0	.82	.79	.77	.82	.79	.77	.81	.78	.77	.80	.78	.76	.79	.77	.76	.75
8.0	.81	.78	.76	.80	.77	.76	.80	.77	.75	.79	.77	.75	.78	.76	.75	.74
9.0	.79	.76	.74	.79	.76	.74	.78	.76	.74	.78	.75	.74	.77	.75	.74	.73
10.0	.78	.75	.73	.78	.75	.73	.77	.75	.73	.76	.74	.73	.76	.74	.73	.72

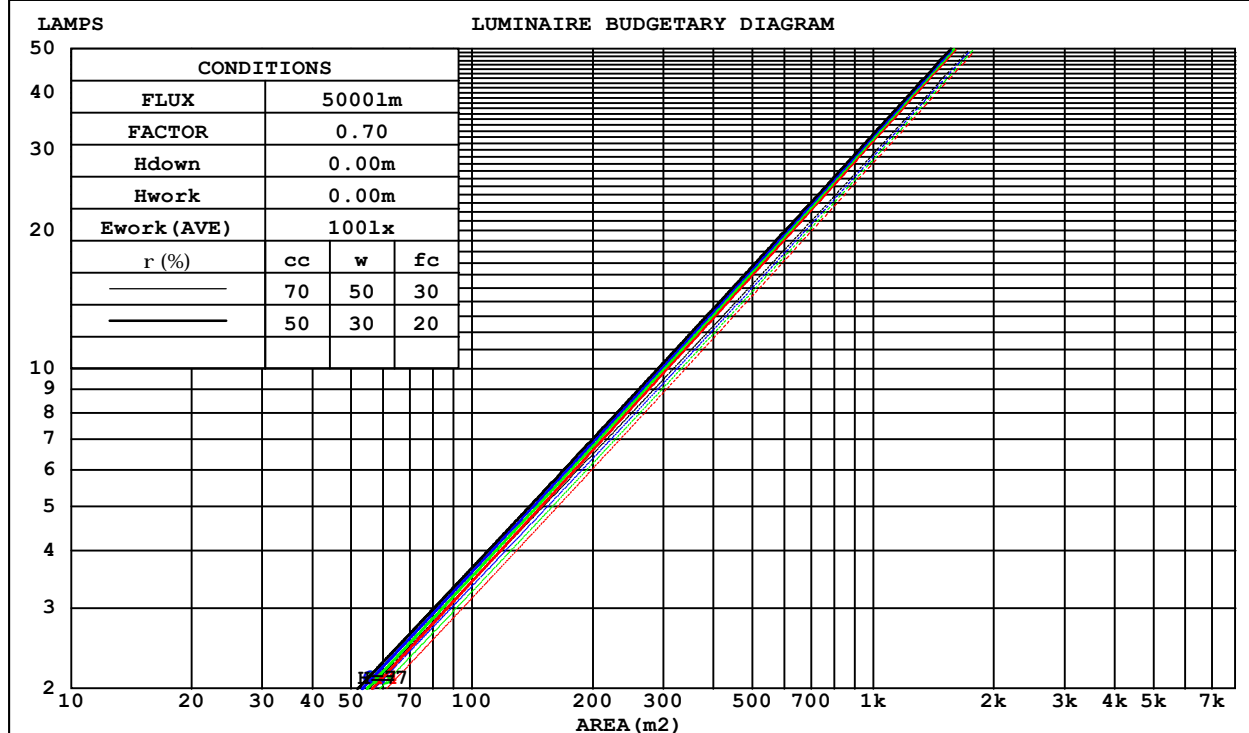

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083 15R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

### WEC AND CCEC

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190581
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.107	.061	.019	.101	.058	.018	.090	.052	.017	.080	.046	.015	.071	.041	.013	
2.0	.098	.053	.016	.093	.051	.016	.084	.047	.015	.076	.043	.013	.069	.039	.012	
3.0	.090	.048	.014	.086	.046	.014	.079	.043	.013	.072	.039	.012	.066	.036	.011	
4.0	.083	.043	.013	.080	.042	.012	.074	.039	.012	.068	.037	.011	.063	.034	.010	
5.0	.077	.039	.011	.075	.038	.011	.069	.036	.011	.065	.034	.010	.060	.032	.010	
6.0	.072	.036	.010	.070	.035	.010	.066	.034	.010	.062	.032	.009	.058	.030	.009	
7.0	.068	.034	.010	.066	.033	.009	.062	.031	.009	.059	.030	.009	.055	.029	.008	
8.0	.064	.031	.009	.062	.031	.009	.059	.030	.008	.056	.028	.008	.053	.027	.008	
9.0	.061	.029	.008	.059	.029	.008	.056	.028	.008	.054	.027	.008	.051	.026	.008	
10.0	.058	.028	.008	.056	.027	.008	.054	.026	.007	.051	.026	.007	.049	.025	.007	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.165	.165	.165	.141	.141	.141	.096	.096	.096	.055	.055	.055	.018	.018	.018	
1.0	.145	.137	.129	.124	.118	.111	.085	.081	.077	.049	.047	.045	.016	.015	.014	
2.0	.129	.115	.104	.110	.099	.090	.076	.069	.063	.044	.040	.037	.014	.013	.012	
3.0	.115	.098	.085	.099	.085	.074	.068	.059	.052	.039	.034	.030	.013	.011	.010	
4.0	.103	.085	.070	.089	.073	.061	.061	.051	.043	.035	.030	.026	.011	.010	.008	
5.0	.093	.074	.059	.080	.064	.052	.055	.045	.036	.032	.026	.022	.010	.009	.007	
6.0	.085	.065	.050	.073	.056	.044	.050	.039	.031	.029	.023	.018	.009	.008	.006	
7.0	.078	.057	.043	.067	.050	.038	.046	.035	.027	.027	.021	.016	.009	.007	.005	
8.0	.072	.051	.037	.062	.045	.033	.043	.031	.023	.025	.018	.014	.008	.006	.005	
9.0	.067	.046	.033	.057	.040	.028	.040	.028	.020	.023	.017	.012	.007	.005	.004	
10.0	.062	.042	.029	.053	.036	.025	.037	.026	.018	.022	.015	.011	.007	.005	.004	

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Zoe  
 Test Date:2022-7-19

g Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
 LENS: PM-1083 15R  
 DRIVER:PUP10T-1LMC-350 250mA  
 30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm										
NAME: 2118.582-LEA-01					TYPE:			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:2207190581		
MFR.: RISE					SUR.:0.003737385m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.5	9.0	8.7	9.2	9.3	8.8	9.3	9.0	9.5	9.6
3H	8.7	9.2	8.9	9.4	9.6	9.1	9.6	9.3	9.7	9.9
4H	8.8	9.2	9.0	9.4	9.7	9.2	9.7	9.4	9.9	10.1
6H	8.9	9.3	9.1	9.6	9.8	9.3	9.8	9.6	10.0	10.2
8H	8.9	9.4	9.2	9.6	9.9	9.4	9.8	9.7	10.1	10.3
12H	9.0	9.4	9.3	9.7	9.9	9.4	9.9	9.7	10.1	10.4
4H 2H	8.6	9.1	8.8	9.3	9.5	8.9	9.4	9.1	9.6	9.8
3H	8.9	9.3	9.2	9.6	9.8	9.2	9.7	9.5	9.9	10.2
4H	9.0	9.4	9.3	9.7	10.0	9.4	9.8	9.7	10.1	10.4
6H	9.2	9.6	9.6	9.9	10.2	9.6	10.0	10.0	10.3	10.6
8H	9.3	9.7	9.7	10.0	10.4	9.7	10.1	10.1	10.4	10.8
12H	9.4	9.7	9.8	10.1	10.5	9.9	10.2	10.3	10.6	10.9
8H 4H	9.0	9.3	9.4	9.7	10.1	9.4	9.7	9.8	10.1	10.4
6H	9.3	9.6	9.8	10.0	10.4	9.7	10.0	10.1	10.4	10.8
8H	9.5	9.8	10.0	10.2	10.6	9.9	10.2	10.4	10.6	11.0
12H	9.7	9.9	10.2	10.4	10.9	10.2	10.4	10.7	10.8	11.3
12H 4H	9.0	9.3	9.4	9.7	10.1	9.4	9.7	9.8	10.0	10.4
6H	9.4	9.6	9.8	10.0	10.5	9.7	10.0	10.2	10.4	10.8
8H	9.6	9.8	10.1	10.3	10.7	10.0	10.2	10.5	10.7	11.1
Variations with the observer position at spacings:										
S = 1.0H	+ 0.9 / - 1.2					+ 0.8 / - 1.1				
1.5H	+ 0.9 / - 0.8					+ 1.0 / - 0.7				
2.0H	+ 2.0 / - 2.0					+ 1.8 / - 2.0				

CIE Pub.117, 873.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.5)  
Area: 0.00373738 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083 15R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

### UTILIZATION FACTORS TABLE

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190581
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	78	73	70	78	73	70	77	72	70	67
0.80	84	79	76	84	79	76	83	79	76	73
1.00	88	83	80	87	83	80	86	82	79	76
1.25	91	87	84	90	86	83	88	85	83	79
1.50	93	89	86	92	89	86	90	87	85	81
2.00	95	92	89	94	91	88	91	89	87	83
2.50	96	93	91	95	92	90	92	90	88	83
3.00	98	95	93	96	94	92	93	91	90	84
4.00	99	97	95	97	96	94	94	93	92	86
5.00	100	98	97	98	97	96	95	94	93	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Zoe  
 Test Date:2022-7-19

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
 LENS: PM-1083 15R  
 DRIVER:PUP10T-1LMC-350 250mA  
 30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2207190581
MFR.: RISE	SUR.: 0.003737385m2	Shielding Angle:

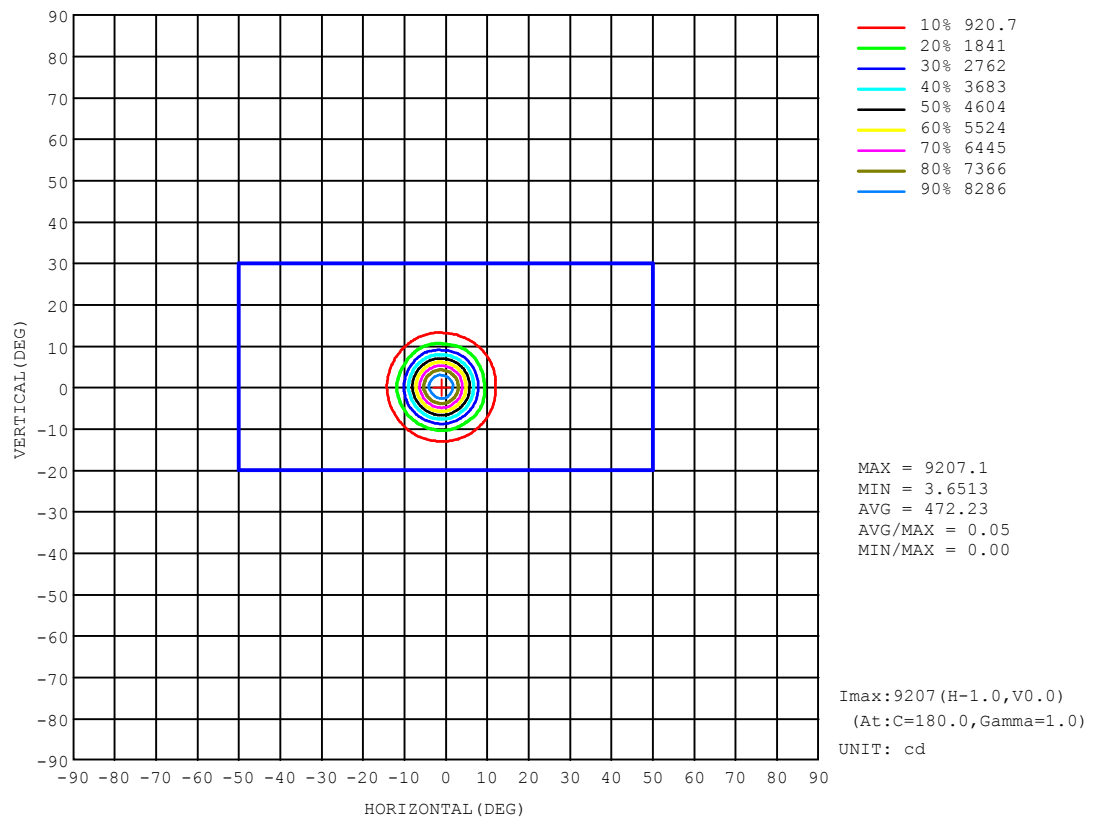


C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Zoe  
 Test Date: 2022-7-19

Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90  
 LENS: PM-1083 15R  
 DRIVER: PUP10T-1LMC-350 250mA  
 30minutes warm-up

### AAI Figure

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190581
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

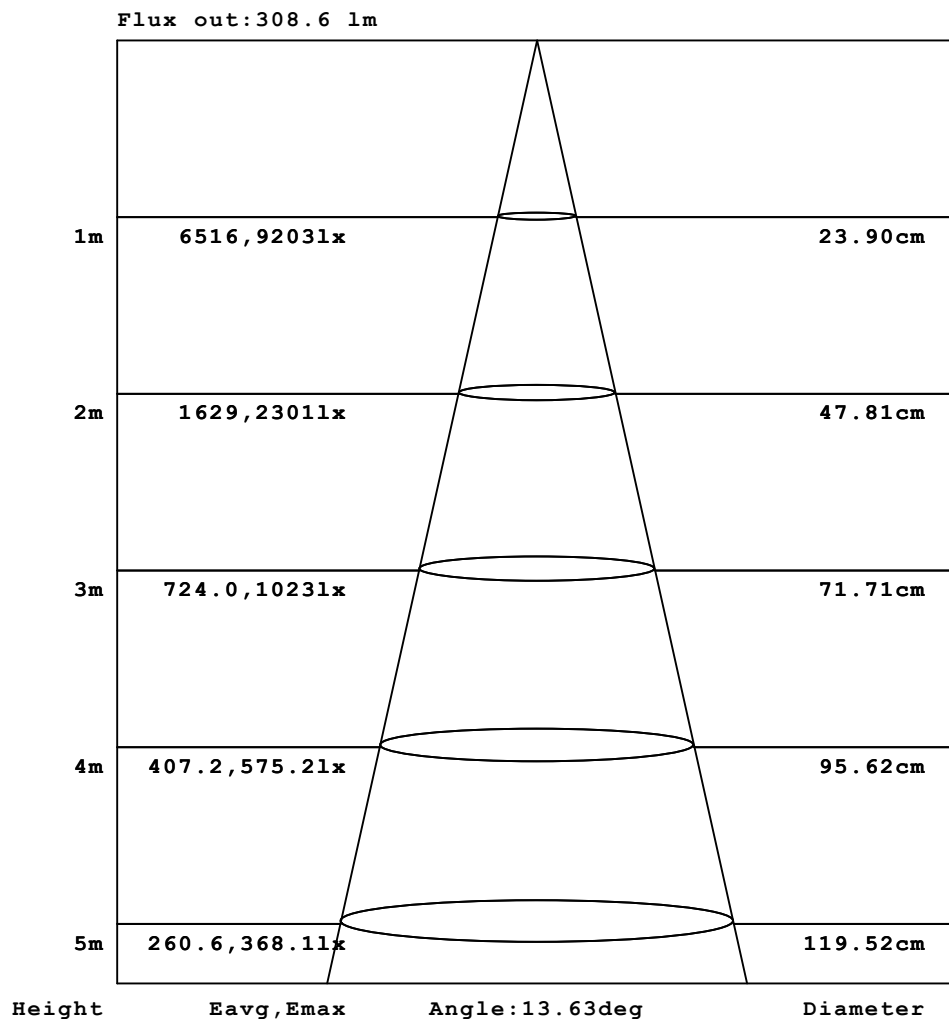


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

deg Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083 15R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## ISOLUX DIAGRAM

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190581
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

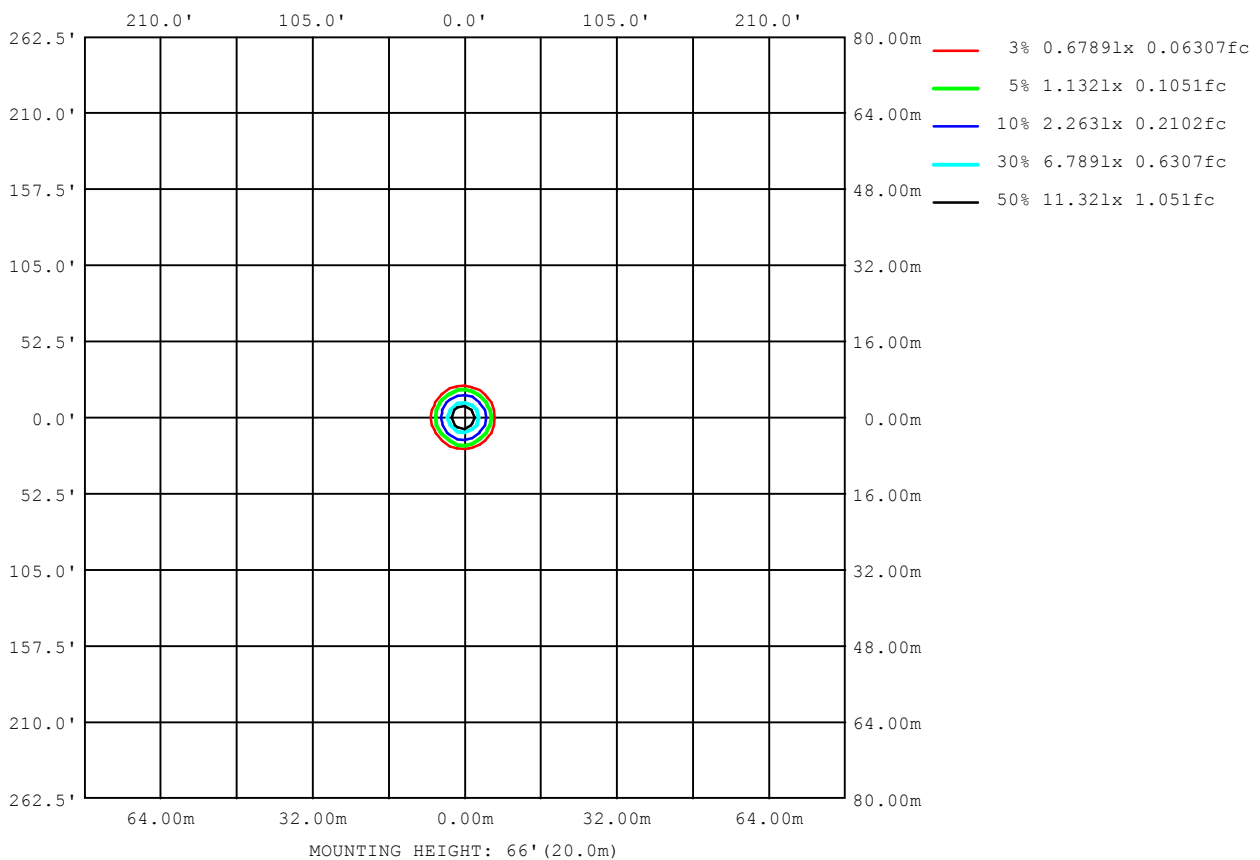

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083 15R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## LED Avg.L Report

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190581
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:


AvgL	cd/m2
L 0~180 (65) av	1325
L 0~180 (75) av	986
L 0~180 (85) av	1140
L 90~270 (65) av	1393
L 90~270 (75) av	994
L 90~270 (85) av	1243
L 45 (65) av	1378
L 45 (75) av	984
L 45 (85) av	1159

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083 15R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## Planar Illuminance Curve

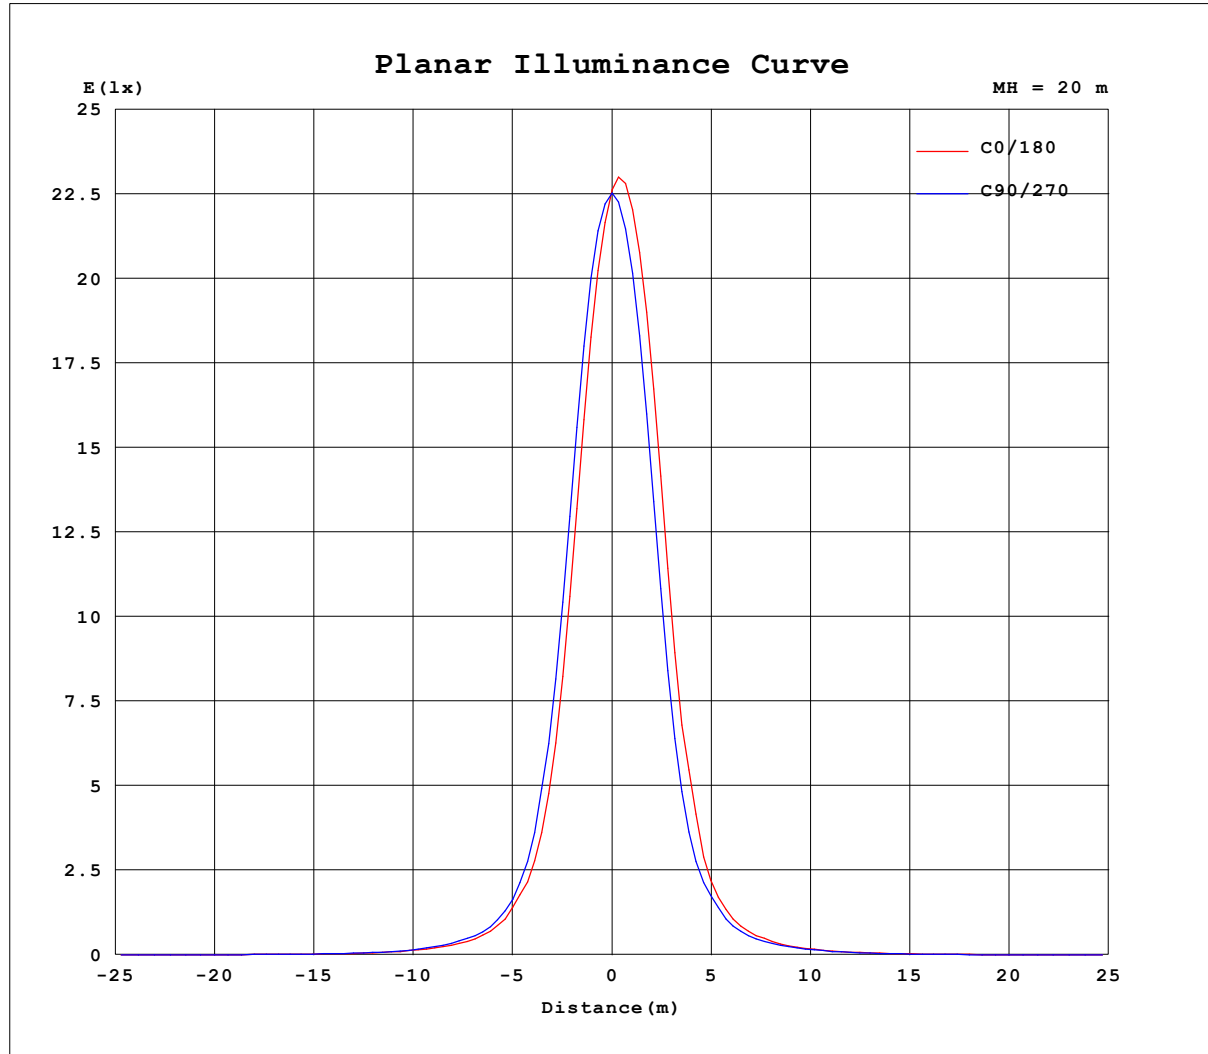

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Zoe  
 Test Date: 2022-7-19

deg Range: 0 - 180DEG  
 Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90  
 LENS: PM-1083 15R  
 DRIVER: PUP10T-1LMC-350 250mA  
 30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.86V I:0.1199A P:13.583W PF:0.9414 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.: 2207190581
MFR.: RISE	SUR.: 0.003737385m2	Shielding Angle:

Table--1

UNIT: cd

C (DEG) g (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	9026	9026	9026	9026	9026	9026	9026	9026	9026	9026	9026	9026						
5	5327	5475	5735	6323	6851	7275	7671	7500	7145	6485	5979	5641						
10	1511	1724	1713	2068	2271	2702	2838	2694	2601	2025	1924	1633						
15	477	499	516	584	683	700	761	768	684	629	543	498						
20	197	213	211	240	249	267	277	269	261	235	227	204						
25	95.6	99.5	103	112	119	126	128	126	125	114	107	99.7						
30	51.6	53.3	54.5	57.9	60.5	63.8	65.6	65.5	64.8	59.6	56.2	53.4						
35	31.2	32.3	32.7	34.0	35.0	36.5	37.2	36.5	36.0	34.2	33.1	32.2						
40	21.2	21.9	21.9	22.2	22.4	22.0	21.9	21.7	21.3	20.9	20.9	21.1						
45	15.6	16.1	16.2	16.1	15.7	14.9	14.0	13.2	13.0	13.0	13.8	14.7						
50	10.8	11.5	11.7	11.4	10.9	10.2	9.06	8.18	7.96	8.32	9.36	10.2						
55	7.34	7.92	8.19	8.01	7.33	6.15	4.97	4.22	3.98	4.29	5.24	6.49						
60	3.88	4.59	4.91	4.71	3.90	2.97	2.50	2.34	2.26	2.40	2.70	3.17						
65	2.46	2.65	2.83	2.82	2.56	2.18	1.72	1.53	1.49	1.58	1.91	2.24						
70	1.67	1.90	2.06	2.19	1.86	1.45	0.98	0.78	0.75	0.81	0.99	1.36						
75	1.18	1.31	1.34	1.26	1.09	0.89	0.73	0.63	0.61	0.66	0.78	0.98						
80	0.92	1.09	1.14	1.06	0.87	0.66	0.50	0.40	0.38	0.41	0.51	0.70						
85	0.53	0.67	0.73	0.68	0.51	0.33	0.22	0.14	0.12	0.13	0.19	0.34						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90  
LENS: PM-1083 15R  
DRIVER: PUP10T-1LMC-350 250mA  
30minutes warm-up