

## Luminaire Photograph



Light Output Ratio:	91.3%	
Luminaire Power:	13.59 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-7-19

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER: PUP10T-1LMC-350 250mA  
30minutes warm-up

## LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

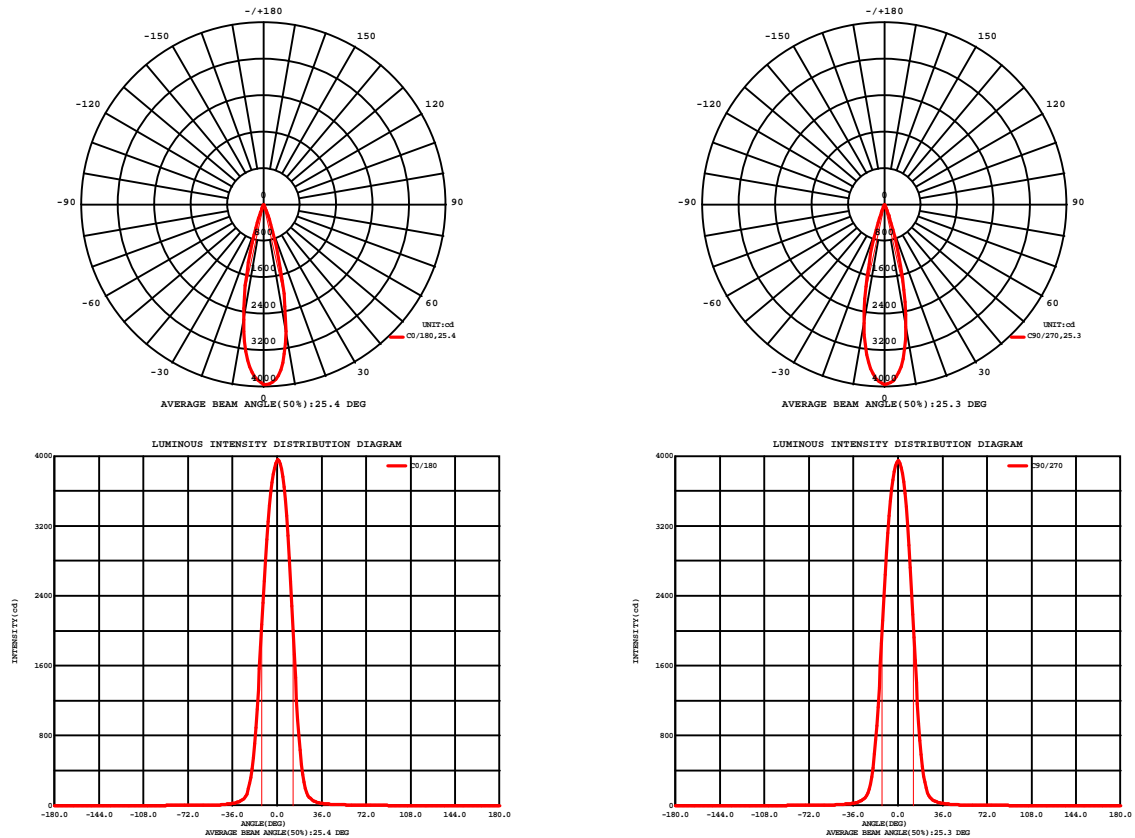


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: Zoe  
Test Date: 2022-7-19

Test Range: 0 - 180DEG  
Test Interval: 1.0DEG  
Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity: 65.0%  
Test Distance: 3.160m [K=1.0000]  
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90  
LENS: PM-1083A 24R  
DRIVER: PUP10T-1LMC-350 250mA  
30minutes warm-up

## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 58.62 lm/W			
MODEL	CREE	I <sub>max</sub> (cd)	3962	S/MH(C0/180)	0.41
NOMINAL POWER(W)	13	LOR(%)	91.3	S/MH(C90/270)	0.41
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	796.86	h UP,DN(C0-180)	0.0,45.9
NOMINAL FLUX(lm)	873.09	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.0,45.3
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	120	h down(%)	91.3	CIBSE SHR MAX	1.00

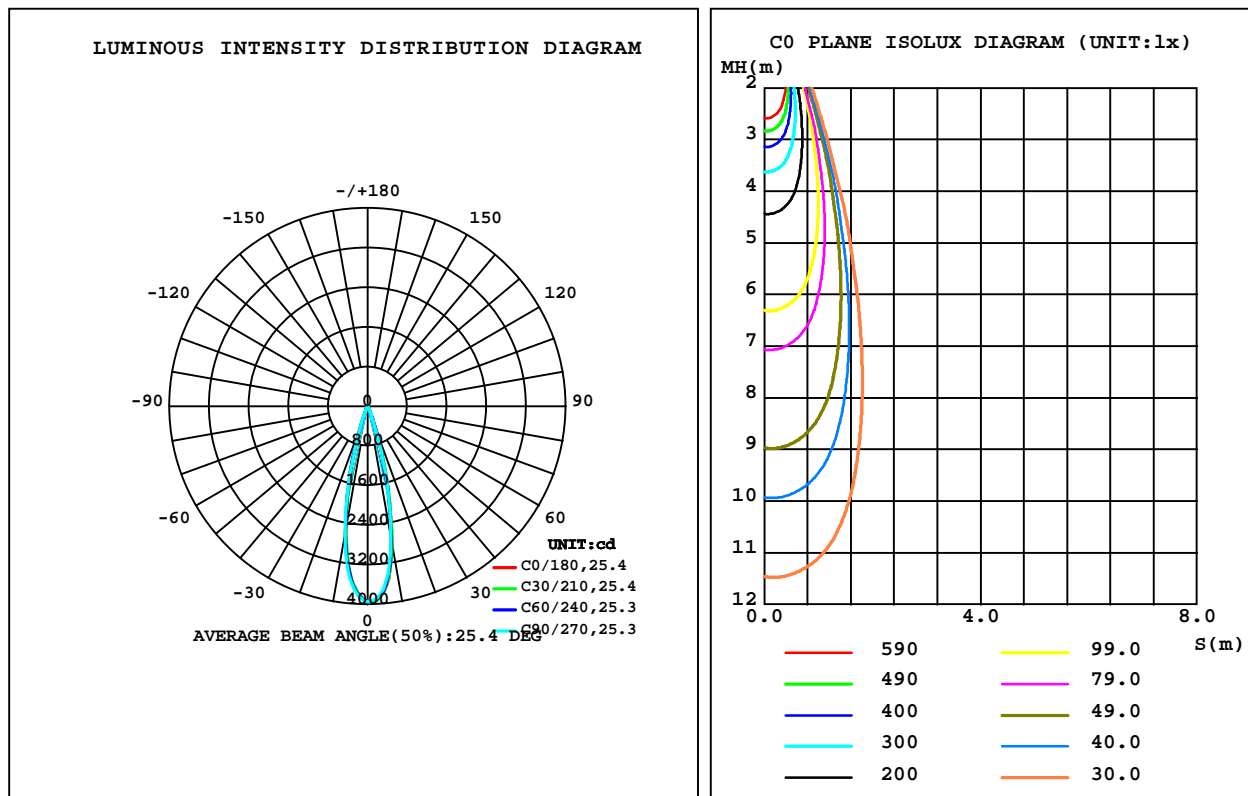

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## ZONAL FLUX DIAGRAM

### ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum, lamp
10	2834	2801	2725	2586	2571	2579	2642	2795	0- 10	318.8	318.8	40,36.5
20	463.0	453.8	442.3	403.6	418.7	428.5	429.1	476.0	10- 20	375.6	694.4	87.1,79.5
30	50.40	50.91	50.63	49.19	46.47	49.68	51.30	53.06	20- 30	67.97	762.4	95.7,87.3
40	18.16	18.20	16.91	15.17	14.97	15.96	17.34	18.67	30- 40	18.38	780.8	98,89.4
50	9.816	9.207	7.259	5.233	4.810	5.507	7.554	9.539	40- 50	8.689	789.4	99.1,90.4
60	4.306	3.452	2.508	1.832	1.607	1.918	2.577	3.684	50- 60	4.359	793.8	99.6,90.9
70	1.673	1.497	1.107	0.8023	0.7078	0.8077	1.115	1.521	60- 70	1.731	795.5	99.8,91.1
80	1.063	0.9123	0.6344	0.3949	0.3454	0.4019	0.6282	0.9216	70- 80	0.9430	796.5	100,91.2
90	0	0	0	0	0	0	0	0	80- 90	0.3818	796.9	100,91.3
100	0	0	0	0	0	0	0	0	90-100	0	796.9	100,91.3
110	0	0	0	0	0	0	0	0	100-110	0	796.9	100,91.3
120	0	0	0	0	0	0	0	0	110-120	0	796.9	100,91.3
130	0	0	0	0	0	0	0	0	120-130	0	796.9	100,91.3
140	0	0	0	0	0	0	0	0	130-140	0	796.9	100,91.3
150	0	0	0	0	0	0	0	0	140-150	0	796.9	100,91.3
160	0	0	0	0	0	0	0	0	150-160	0	796.9	100,91.3
170	0	0	0	0	0	0	0	0	160-170	0	796.9	100,91.3
180	0	0	0	0	0	0	0	0	170-180	0	796.9	100,91.3
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

### LUMINANCE LIMITATION CURVES

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

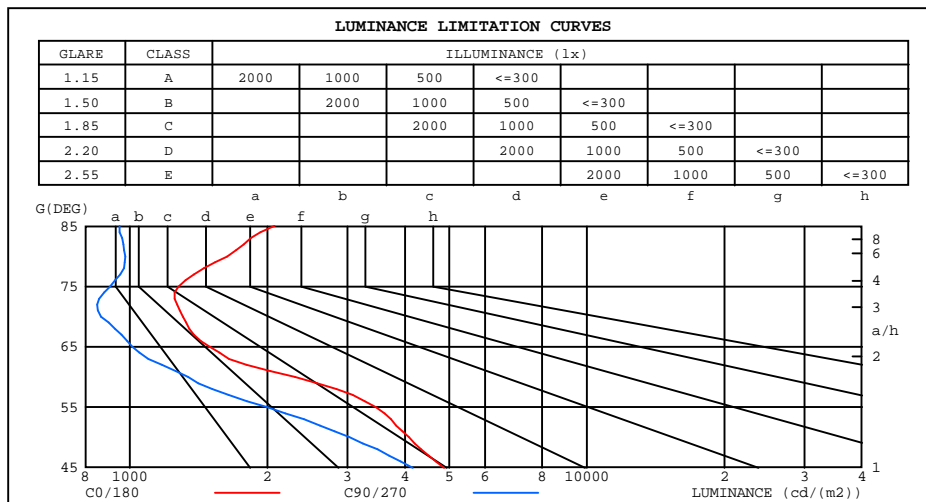


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

G Range: 0 - 180DEG  
G Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.09	1.09	1.09	1.06	1.06	1.06	1.01	1.01	1.01	.97	.97	.97	.93	.93	.93	.91
1.0	1.03	1.02	1.00	1.01	.00	.98	.98	.97	.95	.94	.93	.93	.91	.91	.90	.88
2.0	.99	.96	.94	.97	.95	.93	.94	.92	.91	.92	.90	.89	.89	.88	.87	.86
3.0	.95	.92	.89	.94	.91	.88	.91	.89	.87	.89	.87	.86	.87	.86	.84	.83
4.0	.91	.88	.85	.90	.87	.85	.89	.86	.84	.87	.85	.83	.85	.84	.82	.81
5.0	.88	.85	.82	.88	.84	.82	.86	.83	.81	.85	.82	.80	.83	.81	.80	.79
6.0	.86	.82	.79	.85	.82	.79	.84	.81	.79	.83	.80	.78	.82	.79	.78	.77
7.0	.83	.80	.77	.83	.79	.77	.82	.79	.76	.81	.78	.76	.80	.78	.76	.75
8.0	.81	.77	.75	.80	.77	.75	.80	.77	.74	.79	.76	.74	.78	.76	.74	.73
9.0	.79	.75	.73	.78	.75	.73	.78	.75	.73	.77	.74	.72	.76	.74	.72	.71
10.0	.77	.73	.71	.77	.73	.71	.76	.73	.71	.75	.73	.71	.75	.72	.71	.70

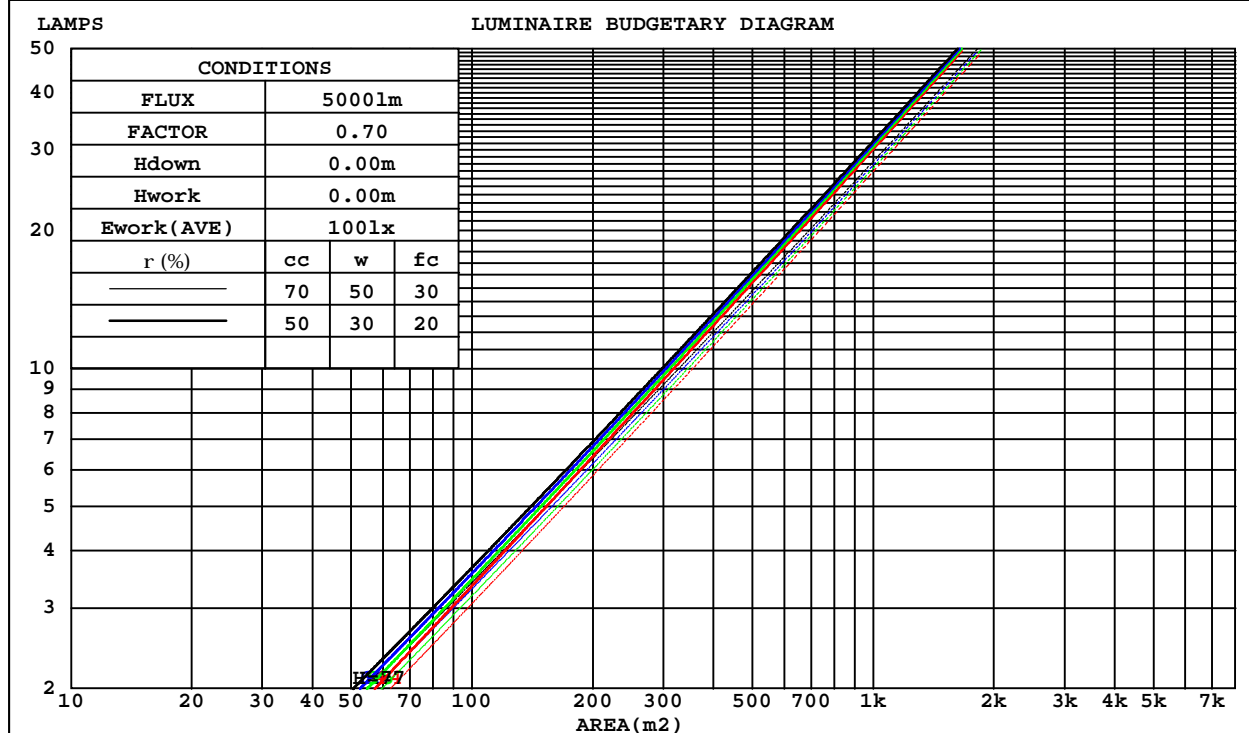

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

### WEC AND CCEC

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.121	.069	.022	.115	.066	.021	.104	.060	.019	.093	.054	.017	.084	.049	.016	
2.0	.112	.061	.019	.107	.059	.018	.097	.054	.017	.089	.050	.016	.081	.046	.014	
3.0	.103	.055	.016	.099	.053	.016	.092	.050	.015	.084	.046	.014	.078	.043	.013	
4.0	.096	.050	.015	.093	.049	.014	.087	.046	.014	.081	.043	.013	.075	.041	.012	
5.0	.090	.046	.013	.088	.045	.013	.082	.043	.013	.077	.041	.012	.072	.039	.012	
6.0	.085	.043	.012	.083	.042	.012	.078	.040	.012	.074	.038	.011	.070	.037	.011	
7.0	.081	.040	.011	.079	.039	.011	.075	.038	.011	.071	.036	.011	.067	.035	.010	
8.0	.077	.038	.011	.075	.037	.010	.071	.036	.010	.068	.034	.010	.065	.033	.010	
9.0	.073	.035	.010	.072	.035	.010	.068	.034	.010	.066	.033	.009	.063	.032	.009	
10.0	.070	.034	.009	.069	.033	.009	.066	.032	.009	.063	.031	.009	.061	.031	.009	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.174	.174	.174	.149	.149	.149	.101	.101	.101	.058	.058	.058	.019	.019	.019	
1.0	.153	.144	.135	.131	.124	.117	.090	.085	.081	.052	.049	.047	.017	.016	.015	
2.0	.137	.121	.108	.117	.104	.094	.080	.072	.065	.046	.042	.038	.015	.014	.012	
3.0	.123	.103	.088	.105	.089	.076	.072	.062	.054	.042	.036	.032	.013	.012	.010	
4.0	.111	.089	.073	.095	.077	.063	.065	.054	.044	.038	.031	.026	.012	.010	.009	
5.0	.101	.078	.061	.087	.067	.053	.060	.047	.037	.035	.028	.022	.011	.009	.007	
6.0	.093	.069	.052	.080	.060	.045	.055	.042	.032	.032	.025	.019	.010	.008	.006	
7.0	.086	.061	.044	.074	.053	.038	.051	.037	.027	.030	.022	.016	.010	.007	.005	
8.0	.079	.055	.038	.068	.048	.033	.047	.033	.024	.028	.020	.014	.009	.006	.005	
9.0	.074	.050	.033	.064	.043	.029	.044	.030	.020	.026	.018	.012	.008	.006	.004	
10.0	.070	.045	.029	.060	.039	.025	.042	.028	.018	.024	.016	.011	.008	.005	.004	

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## UGR(Unified Glare Rating) Table

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm										
NAME: 2118.582-LEA-01					TYPE:			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:2207190582		
MFR.: RISE					SUR.:0.003737385m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.5	8.1	7.7	8.2	8.4	6.5	7.1	6.7	7.2	7.4
3H	7.7	8.2	7.9	8.4	8.6	6.6	7.2	6.8	7.4	7.5
4H	7.8	8.3	8.0	8.5	8.7	6.7	7.2	6.9	7.4	7.6
6H	8.0	8.5	8.2	8.7	8.9	6.8	7.3	7.0	7.5	7.7
8H	8.1	8.6	8.4	8.8	9.1	6.8	7.3	7.1	7.5	7.8
12H	8.2	8.7	8.5	8.9	9.2	6.8	7.3	7.1	7.6	7.8
4H 2H	7.5	8.0	7.7	8.2	8.4	6.6	7.1	6.8	7.3	7.5
3H	7.8	8.2	8.1	8.5	8.8	6.8	7.3	7.1	7.5	7.8
4H	7.9	8.4	8.3	8.7	9.0	6.9	7.4	7.3	7.7	7.9
6H	8.3	8.7	8.6	9.0	9.3	7.1	7.5	7.5	7.8	8.2
8H	8.5	8.8	8.8	9.2	9.5	7.2	7.6	7.6	7.9	8.3
12H	8.6	9.0	9.0	9.4	9.7	7.2	7.6	7.6	7.9	8.3
8H 4H	7.9	8.3	8.3	8.6	9.0	7.0	7.3	7.3	7.7	8.0
6H	8.4	8.7	8.8	9.1	9.5	7.3	7.6	7.7	8.0	8.4
8H	8.7	8.9	9.1	9.4	9.8	7.4	7.7	7.9	8.1	8.6
12H	9.0	9.2	9.4	9.7	10.1	7.6	7.8	8.0	8.2	8.7
12H 4H	7.9	8.2	8.3	8.6	9.0	7.0	7.3	7.4	7.7	8.0
6H	8.4	8.7	8.8	9.1	9.5	7.3	7.6	7.8	8.0	8.4
8H	8.7	9.0	9.2	9.4	9.9	7.5	7.8	8.0	8.2	8.7
Variations with the observer position at spacings:										
S = 1.0H	+ 0.7 / - 1.0					+ 1.2 / - 1.8				
1.5H	+ 1.0 / - 0.7					+ 1.5 / - 1.4				
2.0H	+ 1.5 / - 1.8					+ 2.0 / - 1.9				

CIE Pub.117, 873.1 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -0.5)  
Area: 0.00373738 m2

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

### UTILIZATION FACTORS TABLE

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	82	77	74	82	77	74	81	77	74	71
0.80	89	84	81	88	84	81	87	83	80	77
1.00	92	88	85	92	87	84	90	87	84	81
1.25	96	91	88	95	91	88	93	90	87	84
1.50	98	94	91	97	93	91	95	92	90	86
2.00	100	96	94	99	96	93	96	94	92	87
2.50	101	98	96	100	97	95	97	95	93	88
3.00	103	100	97	101	98	96	98	96	94	89
4.00	104	102	100	103	101	99	99	98	96	90
5.00	105	104	102	104	102	101	100	99	98	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:Zoe  
 Test Date:2022-7-19

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
 Humidity:65.0%  
 Test Distance:3.160m [K=1.0000]  
 Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
 LENS: PM-1083A 24R  
 DRIVER:PUP10T-1LMC-350 250mA  
 30minutes warm-up

## ISOCANDELA DIAGRAM

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

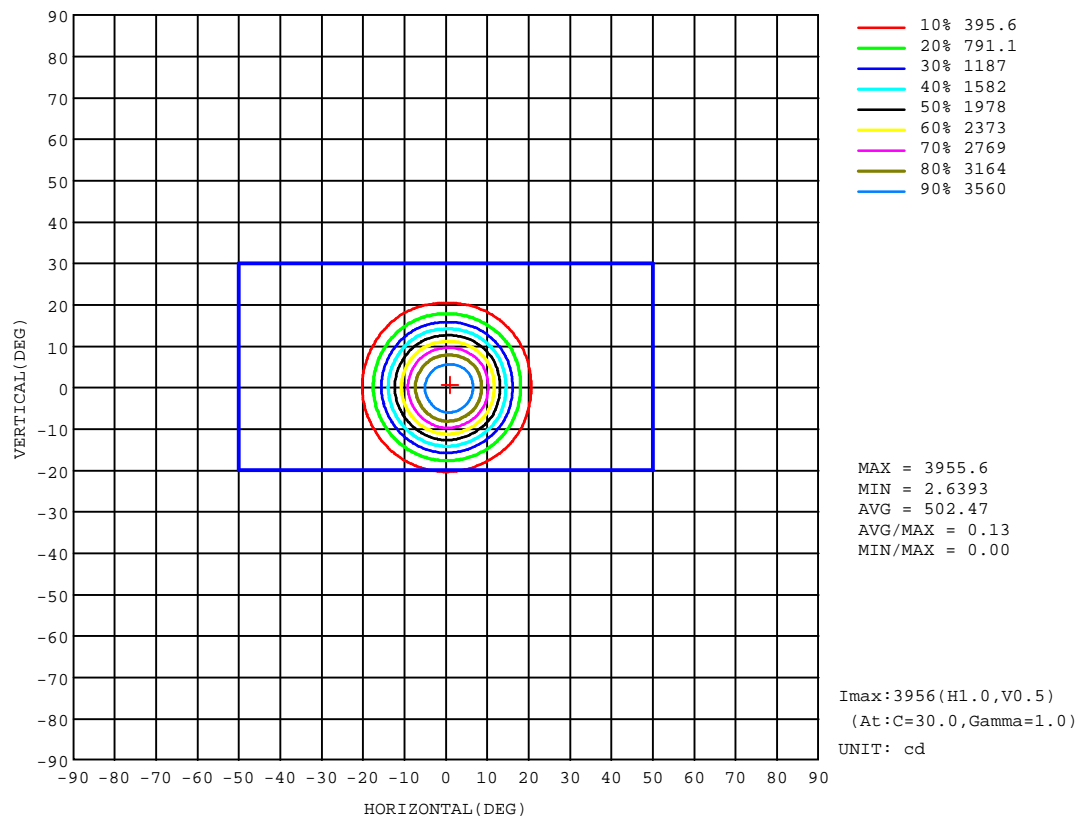


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## AAI Figure

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

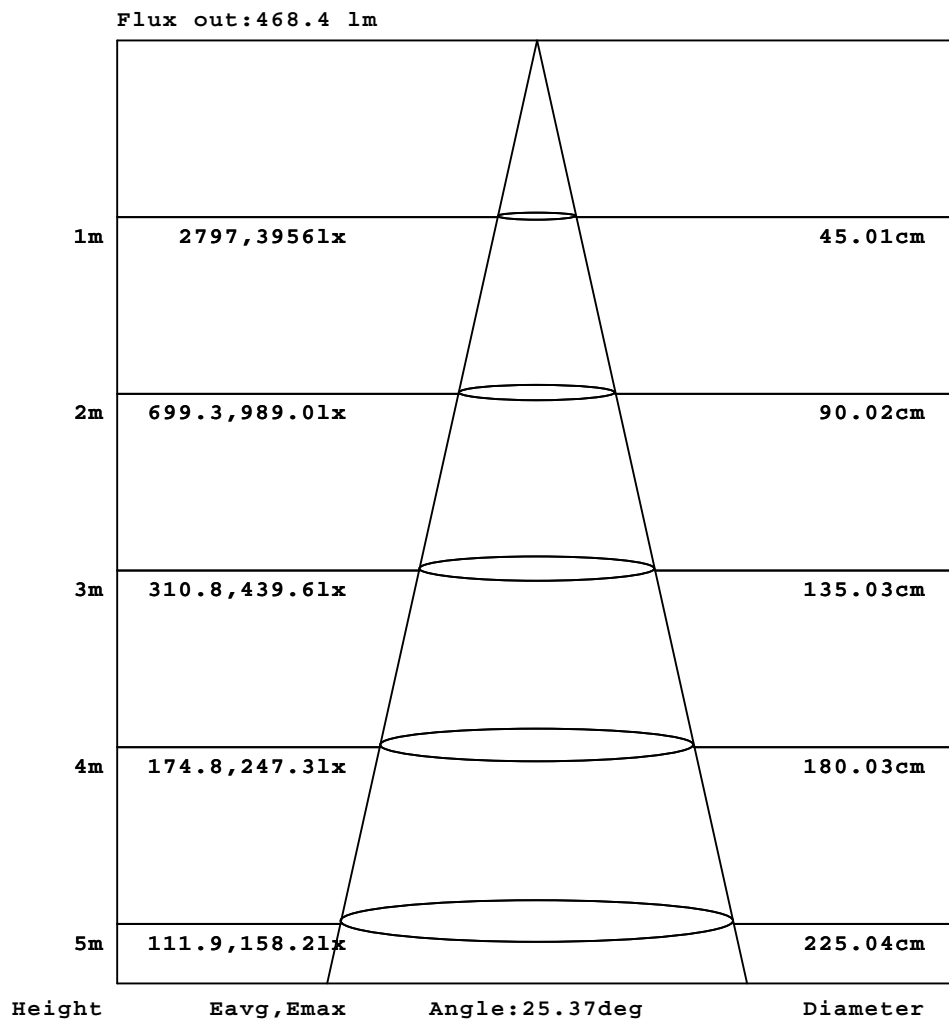

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up



## ISOLUX DIAGRAM

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

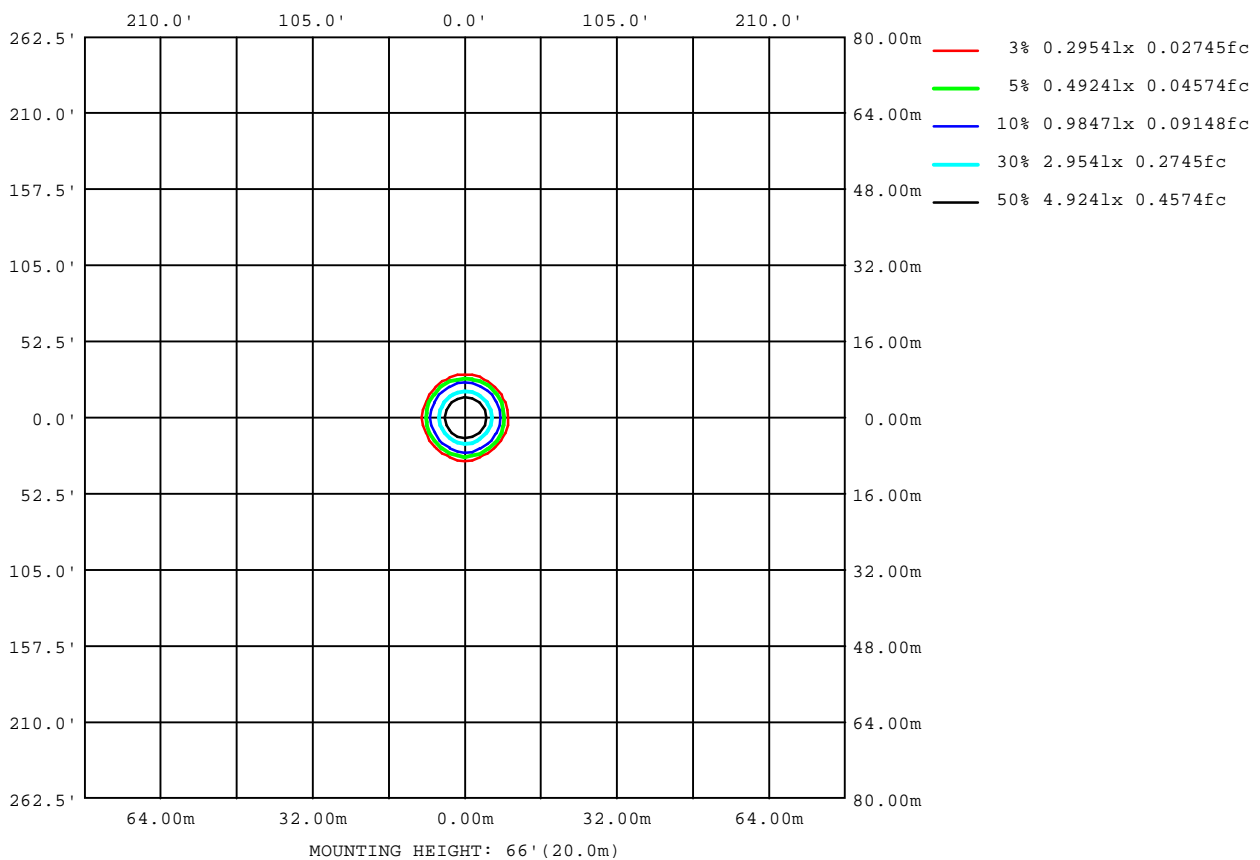

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## LED Avg.L Report

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1092
L_0~180(75)av	962
L_0~180(85)av	1178
L_90~270(65)av	1025
L_90~270(75)av	902
L_90~270(85)av	943
L_45(65)av	1059
L_45(75)av	908
L_45(85)av	1019

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up

## Planar Illuminance Curve

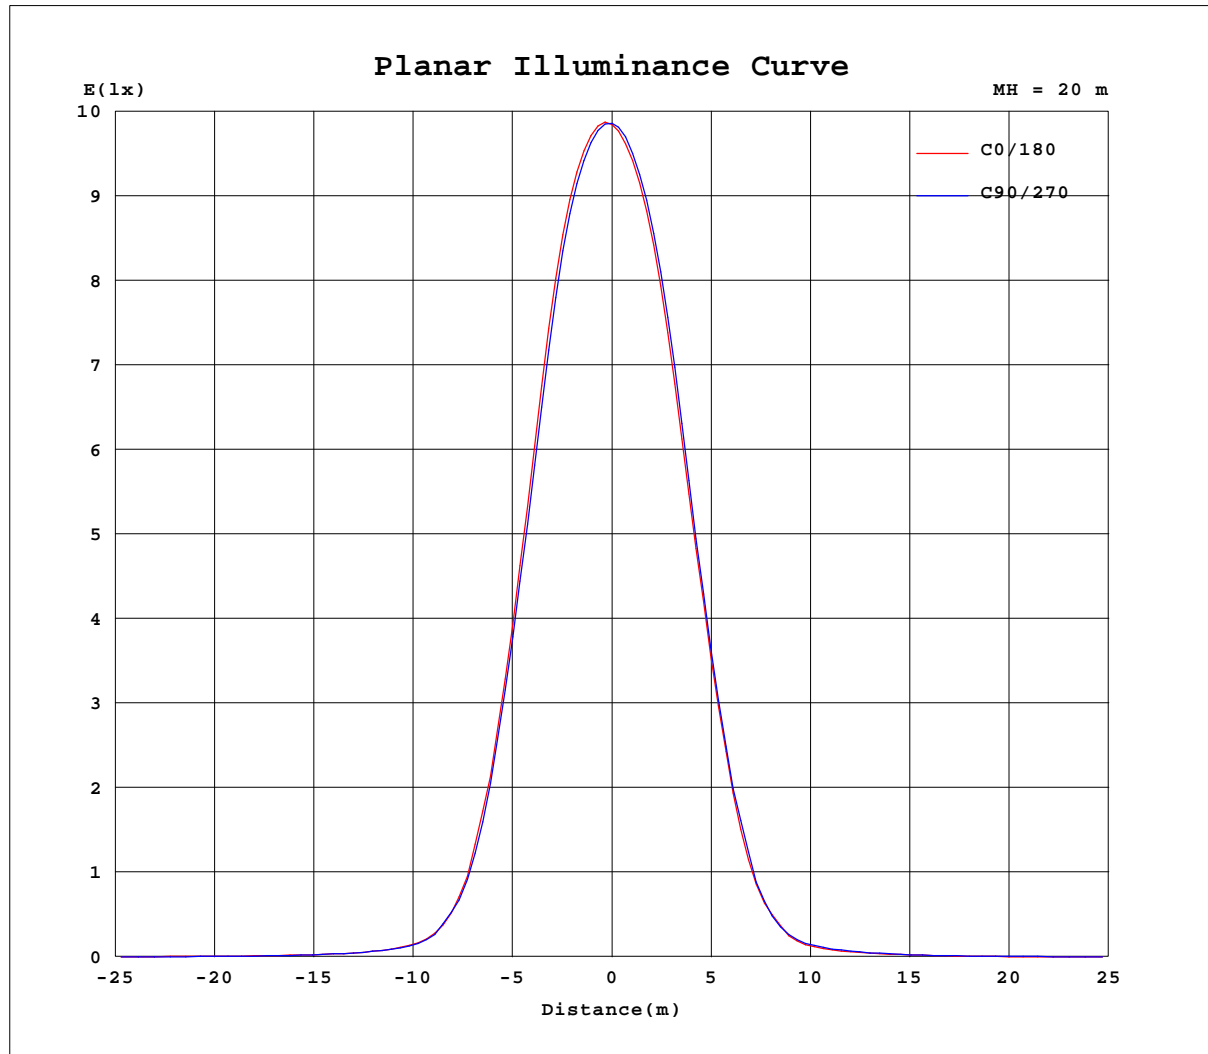

C Range: 0 - 360DEG  
 C Interval: 30.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: Zoe  
 Test Date: 2022-7-19

g Range: 0 - 180DEG  
 g Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
 Humidity: 65.0%  
 Test Distance: 3.160m [K=1.0000]  
 Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90  
 LENS: PM-1083A 24R  
 DRIVER: PUP10T-1LMC-350 250mA  
 30minutes warm-up

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.87V I:0.1198A P:13.595W PF:0.9433 Freq:59.98Hz Lamp Flux:873.09x1 lm		
NAME: 2118.582-LEA-01	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2207190582
MFR.: RISE	SUR.:0.003737385m2	Shielding Angle:

Table--1

UNIT: cd

C(°) g (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	3944	3944	3944	3944	3944	3944	3944	3944	3944	3944	3944	3944						
5	3762	3765	3736	3702	3629	3572	3575	3558	3583	3620	3693	3752						
10	2834	2840	2762	2725	2628	2544	2571	2555	2603	2642	2744	2846						
15	1462	1478	1396	1401	1322	1281	1320	1306	1357	1353	1439	1488						
20	463	472	436	442	414	393	419	412	445	429	472	481						
25	115	117	110	111	110	101	103	102	115	111	120	118						
30	50.4	52.0	49.9	50.6	50.1	48.3	46.5	48.1	51.3	51.3	53.9	52.3						
35	28.5	29.1	28.1	28.0	26.9	26.4	26.2	26.7	28.6	28.7	29.8	29.5						
40	18.2	18.6	17.8	16.9	15.4	15.0	15.0	15.4	16.6	17.3	18.8	18.6						
45	12.9	13.1	12.1	11.0	9.42	8.50	8.20	8.85	10.1	11.4	12.7	13.1						
50	9.82	9.67	8.75	7.26	5.59	4.87	4.81	5.02	5.99	7.55	9.22	9.86						
55	7.41	7.08	5.81	4.28	3.28	2.91	2.84	3.00	3.51	4.45	6.22	7.30						
60	4.31	3.90	3.00	2.51	1.98	1.68	1.61	1.73	2.10	2.58	3.27	4.10						
65	2.37	2.27	1.92	1.60	1.28	1.10	1.08	1.14	1.34	1.64	2.02	2.31						
70	1.67	1.61	1.38	1.11	0.87	0.74	0.71	0.74	0.87	1.11	1.41	1.63						
75	1.24	1.18	1.05	0.88	0.71	0.59	0.62	0.59	0.71	0.87	1.05	1.18						
80	1.06	1.00	0.83	0.63	0.45	0.34	0.35	0.35	0.45	0.63	0.84	1.01						
85	0.68	0.61	0.46	0.31	0.15	0.08	0.09	0.09	0.16	0.31	0.48	0.63						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG  
C Interval: 30.0DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:Zoe  
Test Date:2022-7-19

g Range: 0 - 180DEG  
g Interval: 1.0DEG  
Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.416  
Humidity:65.0%  
Test Distance:3.160m [K=1.0000]  
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90  
LENS: PM-1083A 24R  
DRIVER:PUP10T-1LMC-350 250mA  
30minutes warm-up