


Luminaire Photograph

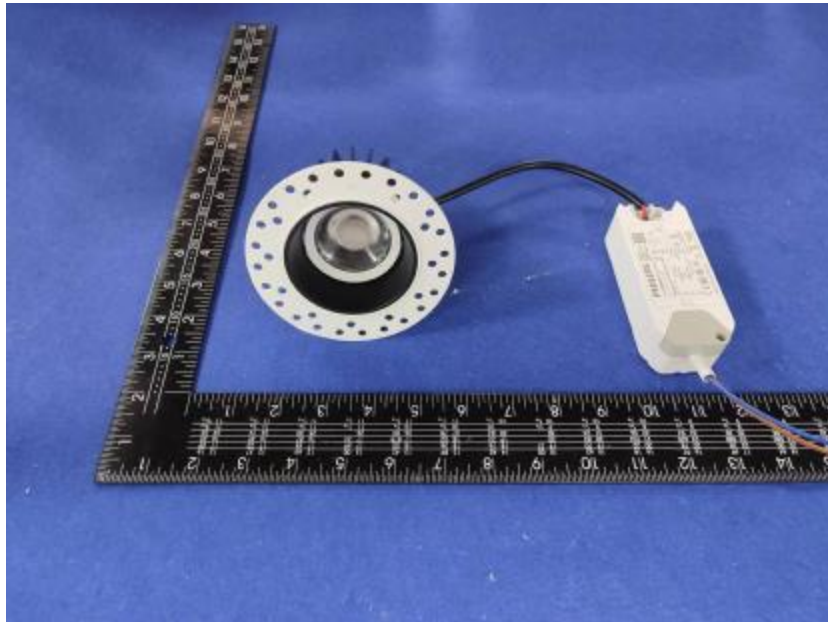

Light Output Ratio:	85.1%	
Luminaire Power:	16.12 W	
SHR Nominal:	0.00	Calculated using the TM5
SHR Maximum:	1.00	fine grid method.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-3-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90
LENS: PM-1083 15R
DRIVER: 9290014101 350mA
30minutes warm-up

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

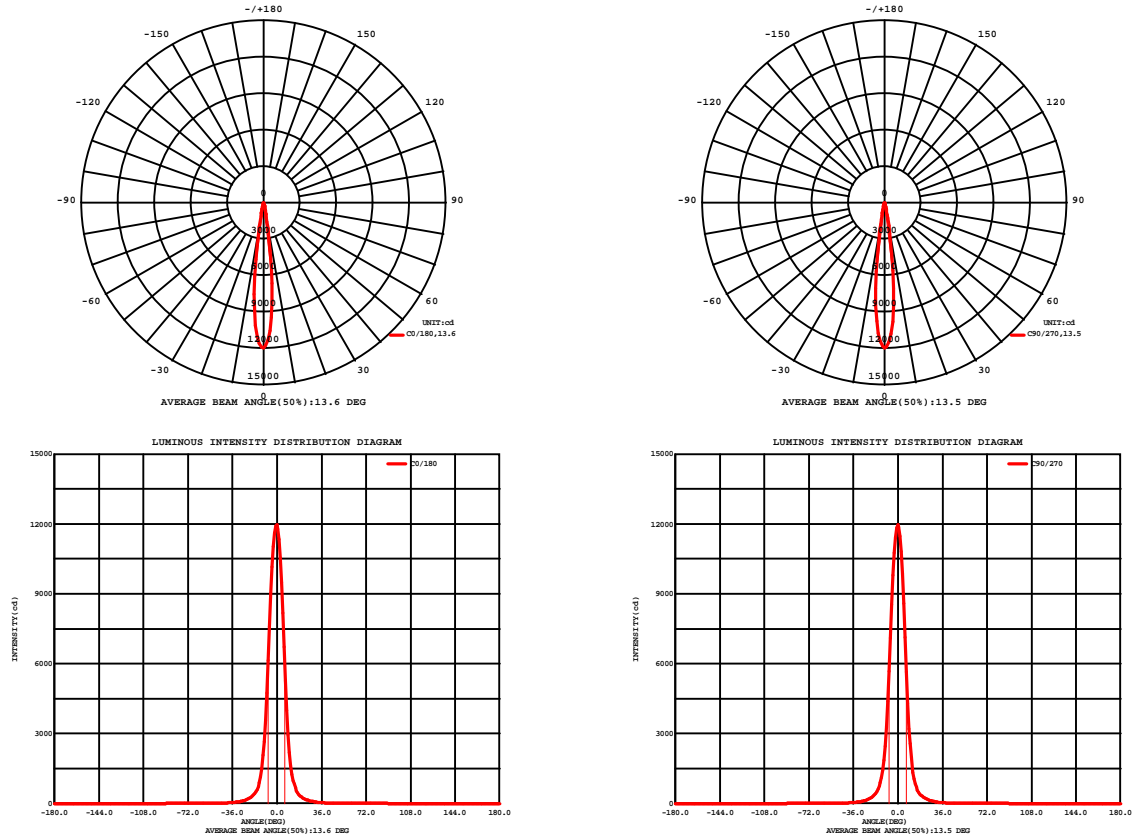


Fig. C0/C180

Fig. C90/C270


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Zoe
Test Date: 2022-3-9

Range: 0 - 180DEG
Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity: 65.0%
Test Distance: 3.160m [K=1.0000]
Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra: 90
LENS: PM-1083 15R
DRIVER: 9290014101 350mA
30minutes warm-up

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 58.28 lm/W			
MODEL	CREE	I _{max} (cd)	11956	S/MH(C0/180)	0.24
NOMINAL POWER(W)	16	LOR(%)	85.1	S/MH(C90/270)	0.23
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	939.68	h UP,DN(C0-180)	0.0,42.4
NOMINAL FLUX(lm)	1103.84	CIE CLASS	DIRECT	h UP,DN(C180-360)	0.0,42.7
LAMPS INSIDE	1	h up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	220	h down(%)	85.1	CIBSE SHR MAX	1.00

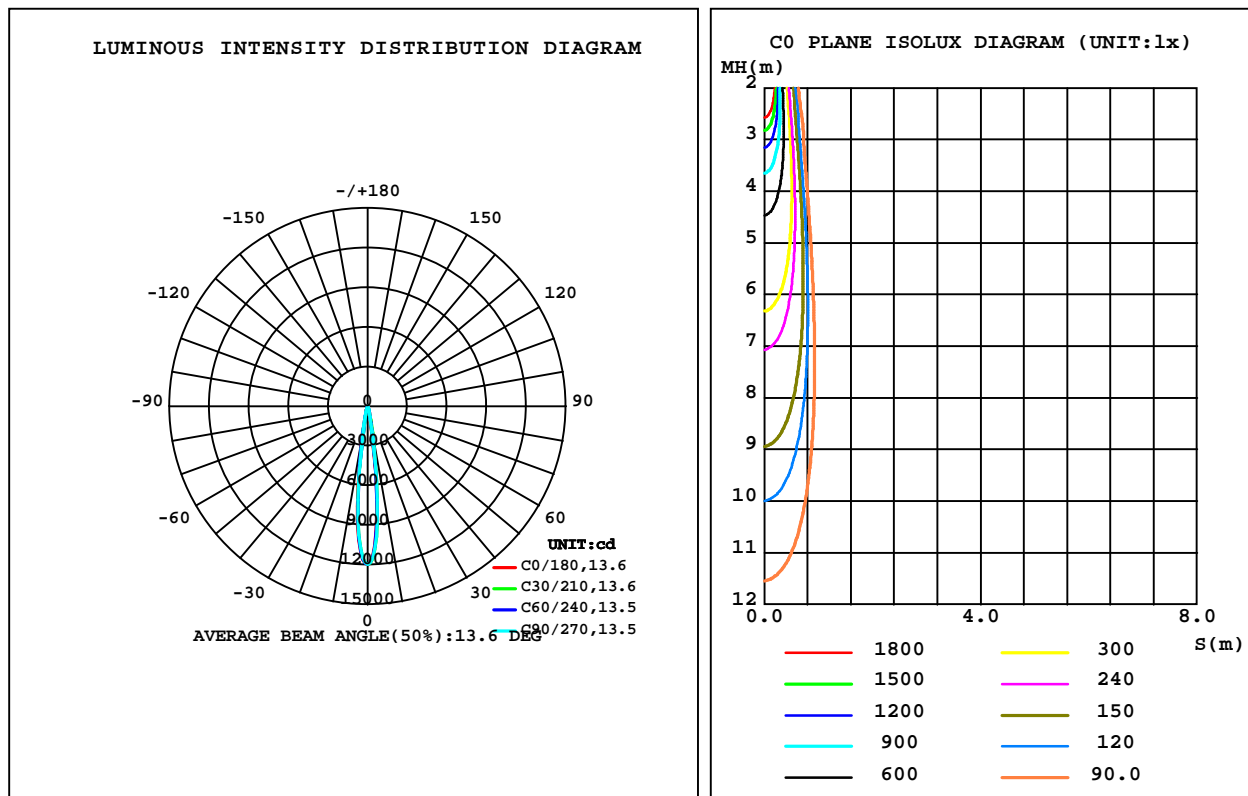

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	218.7	245.9	258.2	262.0	264.8	248.4	245.8	237.7	0- 10	593.4	593.4	63.1,53.8
20	27.87	29.86	30.54	30.75	30.72	31.14	31.20	28.88	10- 20	230.1	823.5	87.6,74.6
30	7.400	7.828	7.970	8.100	8.048	8.053	8.127	7.613	20- 30	72.53	896.1	95.4,81.2
40	2.355	2.436	2.402	2.501	2.649	2.548	2.469	2.424	30- 40	28.66	924.7	98.4,83.8
50	0.7020	0.7108	0.6705	0.7286	0.7837	0.7631	0.7264	0.7207	40- 50	11.04	935.8	99.6,84.8
60	0.1603	0.1713	0.1692	0.1777	0.1791	0.1930	0.1860	0.1740	50- 60	3.201	939.0	99.9,85.1
70	0.0050	0.0044	0.0050	0.0049	0.0055	0.0051	0.0057	0.0045	60- 70	0.6556	939.6	100,85.1
80	0.0035	0.0017	0.0028	0.0019	0.0035	0.0020	0.0028	0.0017	70- 80	0.0338	939.7	100,85.1
90	0	0	0	0	0	0	0	0	80- 90	0.0174	939.7	100,85.1
100	0	0	0	0	0	0	0	0	90-100	0	939.7	100,85.1
110	0	0	0	0	0	0	0	0	100-110	0	939.7	100,85.1
120	0	0	0	0	0	0	0	0	110-120	0	939.7	100,85.1
130	0	0	0	0	0	0	0	0	120-130	0	939.7	100,85.1
140	0	0	0	0	0	0	0	0	130-140	0	939.7	100,85.1
150	0	0	0	0	0	0	0	0	140-150	0	939.7	100,85.1
160	0	0	0	0	0	0	0	0	150-160	0	939.7	100,85.1
170	0	0	0	0	0	0	0	0	160-170	0	939.7	100,85.1
180	0	0	0	0	0	0	0	0	170-180	0	939.7	100,85.1
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up

LUMINANCE LIMITATION CURVES

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

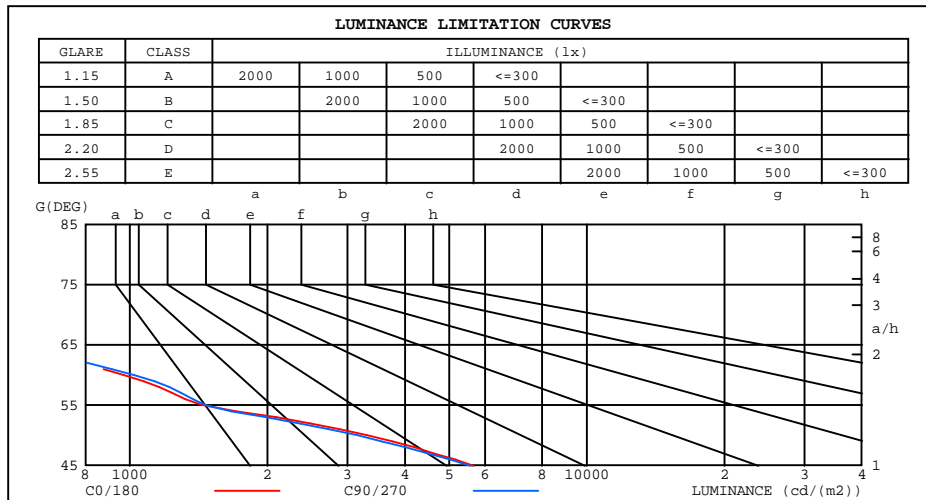

LUMINANCE cd/(m2)		
G(180)	C0/180	C90/270
85	111	75
80	61	48
75	44	40
70	45	44
65	298	287
60	970	1020
55	1440	1464
50	3303	3143
45	5655	5568


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

G Range: 0 - 180DEG
G Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r fc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

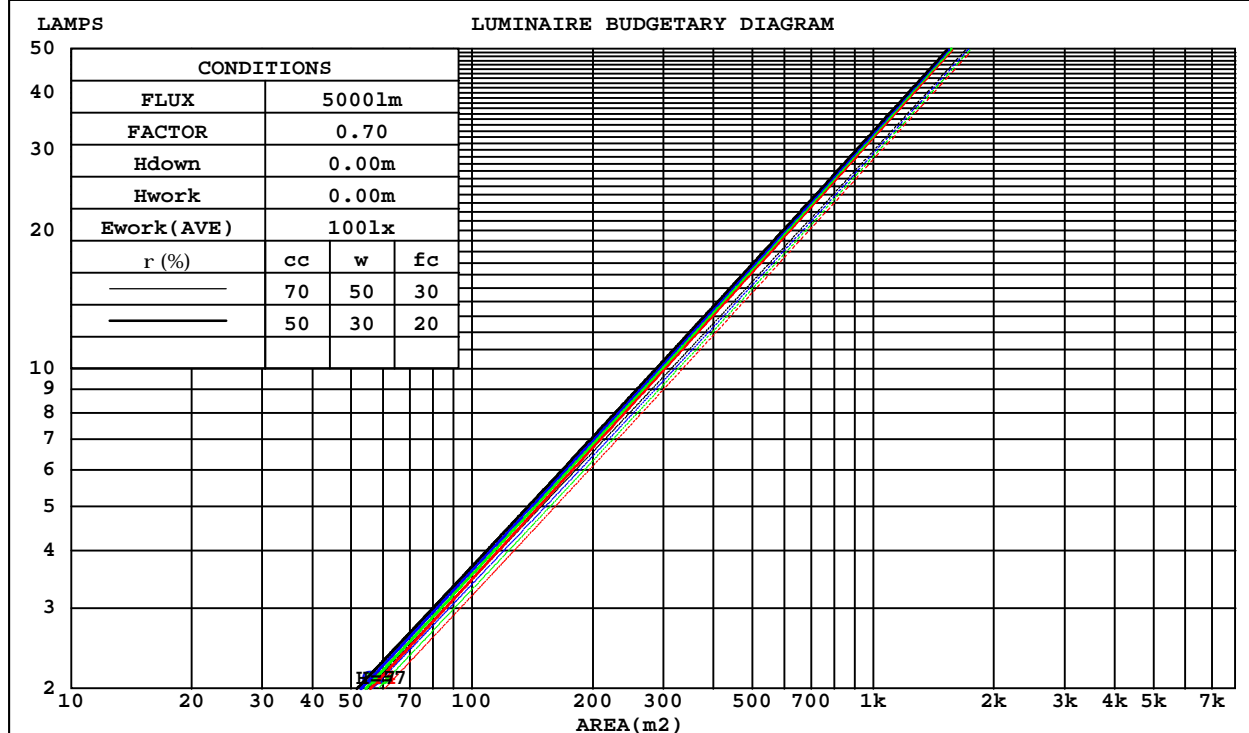

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up

WEC AND CCEC

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients(WEC)															
0.0																
1.0	.101	.057	.018	.095	.054	.017	.085	.049	.016	.075	.043	.014	.066	.039	.012	
2.0	.092	.051	.016	.088	.048	.015	.079	.044	.014	.071	.040	.013	.064	.036	.011	
3.0	.085	.045	.014	.081	.043	.013	.074	.040	.012	.068	.037	.011	.061	.034	.011	
4.0	.079	.041	.012	.075	.039	.012	.070	.037	.011	.064	.034	.010	.059	.032	.010	
5.0	.073	.037	.011	.070	.036	.011	.065	.034	.010	.061	.032	.010	.057	.030	.009	
6.0	.068	.034	.010	.066	.033	.010	.062	.032	.009	.058	.030	.009	.054	.029	.008	
7.0	.064	.032	.009	.062	.031	.009	.059	.030	.009	.055	.028	.008	.052	.027	.008	
8.0	.061	.030	.008	.059	.029	.008	.056	.028	.008	.053	.027	.008	.050	.026	.007	
9.0	.057	.028	.008	.056	.027	.008	.053	.026	.007	.051	.025	.007	.048	.025	.007	
10.0	.055	.026	.007	.053	.026	.007	.051	.025	.007	.049	.024	.007	.047	.023	.007	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.162	.162	.162	.139	.139	.139	.095	.095	.095	.054	.054	.054	.017	.017	.017	
1.0	.142	.134	.127	.122	.115	.110	.083	.079	.076	.048	.046	.044	.015	.015	.014	
2.0	.126	.113	.102	.108	.097	.088	.074	.067	.062	.043	.039	.036	.014	.013	.012	
3.0	.112	.096	.084	.096	.083	.073	.066	.058	.051	.038	.034	.030	.012	.011	.010	
4.0	.101	.083	.070	.086	.072	.060	.059	.050	.043	.034	.029	.025	.011	.010	.008	
5.0	.091	.072	.058	.078	.062	.051	.054	.044	.036	.031	.026	.021	.010	.008	.007	
6.0	.083	.063	.050	.071	.055	.043	.049	.038	.031	.028	.023	.018	.009	.007	.006	
7.0	.076	.056	.043	.065	.049	.037	.045	.034	.026	.026	.020	.016	.008	.007	.005	
8.0	.070	.050	.037	.060	.044	.032	.041	.031	.023	.024	.018	.014	.008	.006	.004	
9.0	.064	.045	.032	.055	.039	.028	.038	.028	.020	.022	.016	.012	.007	.005	.004	
10.0	.060	.041	.028	.052	.036	.025	.036	.025	.018	.021	.015	.010	.007	.005	.003	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up

UGR(Unified Glare Rating) Table

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm										
NAME: 2118.615-ACOT-36					TYPE:			WEIGHT:		
SPEC.:3000K					DIM.:			SERIAL No.:2203090134		
MFR.: RISE					SUR.:0.003316625m2			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.5	8.0	7.7	8.2	8.3	7.4	7.9	7.6	8.1	8.2
3H	7.4	7.9	7.6	8.1	8.2	7.3	7.8	7.5	8.0	8.1
4H	7.3	7.8	7.6	8.0	8.2	7.2	7.7	7.5	7.9	8.1
6H	7.2	7.7	7.5	7.9	8.1	7.1	7.6	7.4	7.8	8.0
8H	7.2	7.6	7.5	7.9	8.1	7.1	7.5	7.4	7.8	8.0
12H	7.1	7.6	7.4	7.8	8.1	7.0	7.5	7.3	7.7	8.0
4H 2H	7.3	7.8	7.6	8.0	8.2	7.2	7.7	7.5	7.9	8.1
3H	7.2	7.6	7.5	7.8	8.1	7.1	7.5	7.4	7.8	8.0
4H	7.1	7.5	7.4	7.8	8.0	7.0	7.4	7.3	7.7	8.0
6H	7.0	7.3	7.3	7.6	8.0	6.9	7.2	7.2	7.6	7.9
8H	6.9	7.2	7.3	7.6	7.9	6.8	7.1	7.2	7.5	7.9
12H	6.9	7.2	7.3	7.5	7.9	6.8	7.1	7.2	7.4	7.8
8H 4H	6.9	7.2	7.3	7.6	7.9	6.8	7.1	7.2	7.5	7.8
6H	6.8	7.1	7.2	7.5	7.9	6.7	7.0	7.1	7.4	7.8
8H	6.7	7.0	7.2	7.4	7.8	6.6	6.9	7.1	7.3	7.7
12H	6.7	6.9	7.1	7.3	7.8	6.6	6.8	7.0	7.2	7.7
12H 4H	6.9	7.2	7.3	7.5	7.9	6.8	7.1	7.2	7.4	7.8
6H	6.7	7.0	7.2	7.4	7.8	6.6	6.9	7.1	7.3	7.7
8H	6.7	6.9	7.1	7.3	7.8	6.6	6.8	7.0	7.2	7.7
Variations with the observer position at spacings:										
S = 1.0H	+ 2.6 / - 8.6					+ 3.0 / - 8.6				
1.5H	+ 4.0 / - 6.6					+ 4.5 / - 7.0				
2.0H	+ 5.2 / - 6.7					+ 5.4 / - 8.8				

CIE Pub.117, 1104 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.3$)
Area: 0.00331663 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up

UTILIZATION FACTORS TABLE

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	77	72	69	77	72	69	76	72	69	66
0.80	83	79	76	83	78	76	82	78	75	72
1.00	86	82	79	86	82	79	84	81	79	76
1.25	89	85	83	89	85	82	87	84	82	78
1.50	92	88	85	90	87	85	89	86	84	80
2.00	93	90	88	92	89	87	90	88	86	82
2.50	95	92	89	93	91	89	91	89	87	82
3.00	96	93	91	94	92	90	92	90	88	83
4.00	97	95	94	96	94	92	93	91	90	84
5.00	98	97	95	97	95	94	93	92	91	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Zoe
 Test Date:2022-3-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
 Humidity:65.0%
 Test Distance:3.160m [K=1.0000]
 Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
 LENS:PM-1083 15R
 DRIVER:9290014101 350mA
 30minutes warm-up

ISOCANDELA DIAGRAM

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

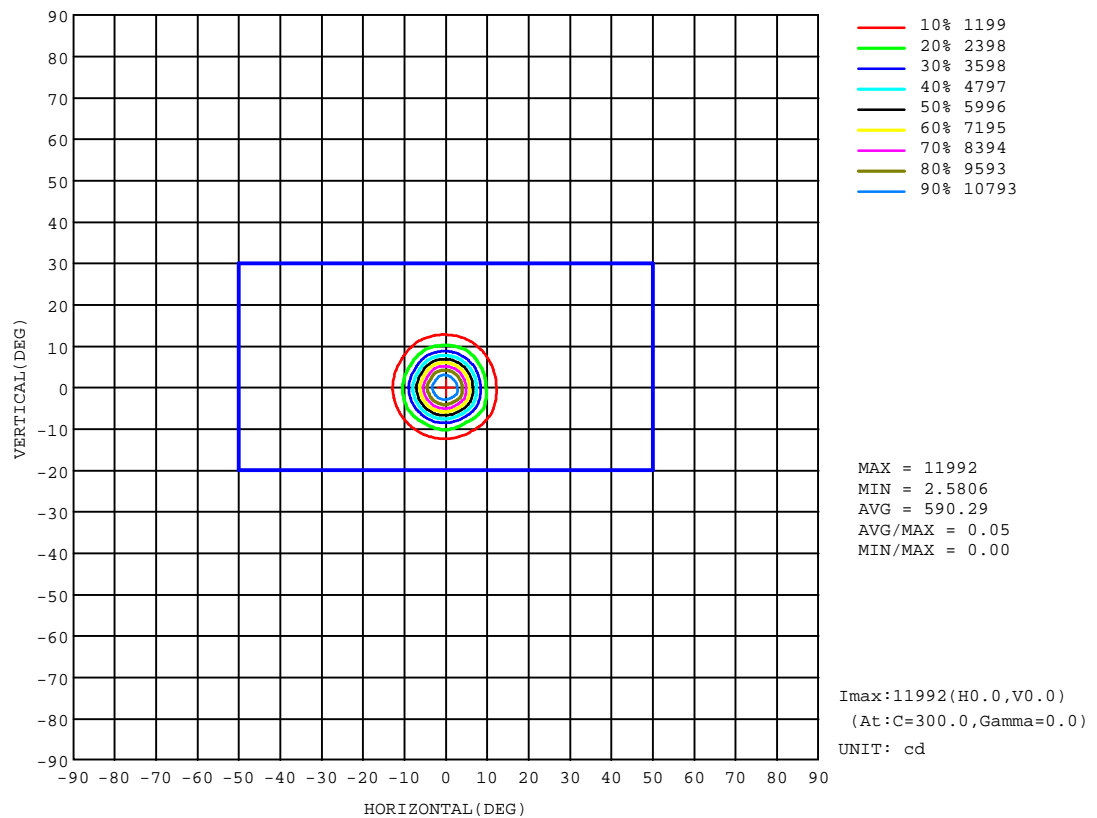


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up

AAI Figure

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

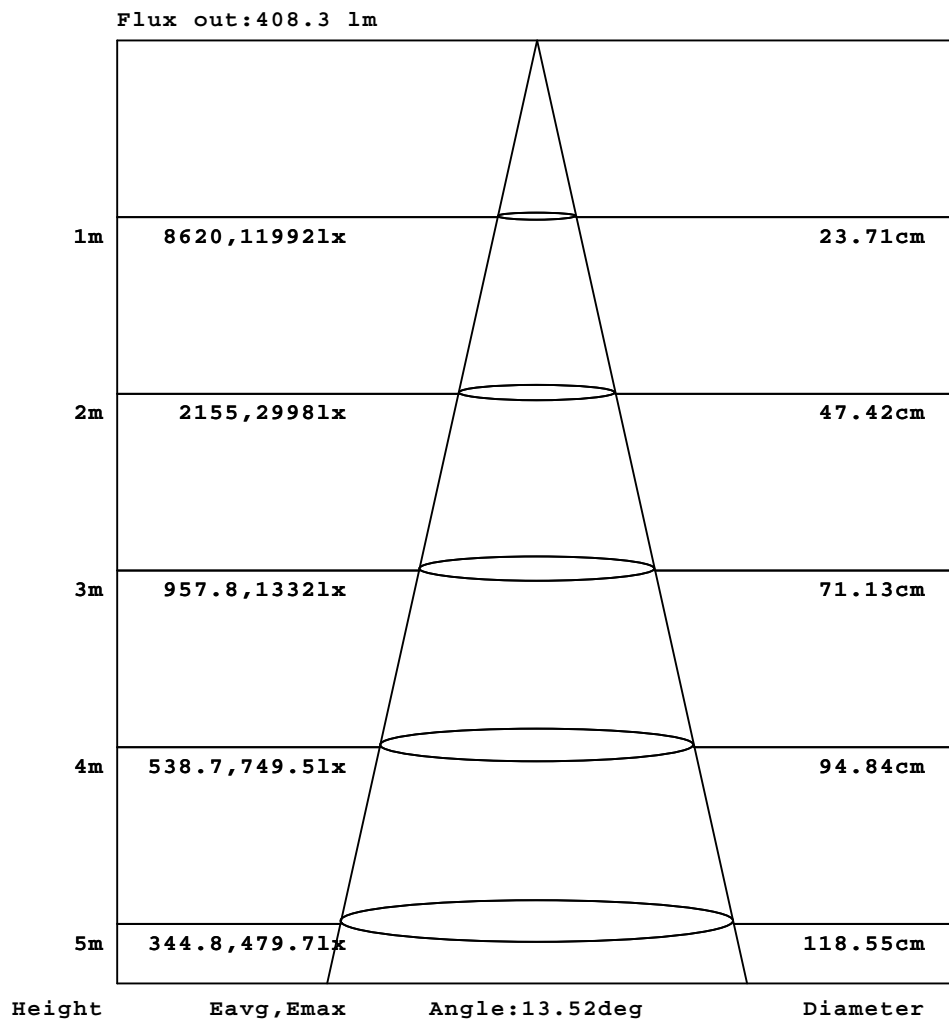

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up



ISOLUX DIAGRAM

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

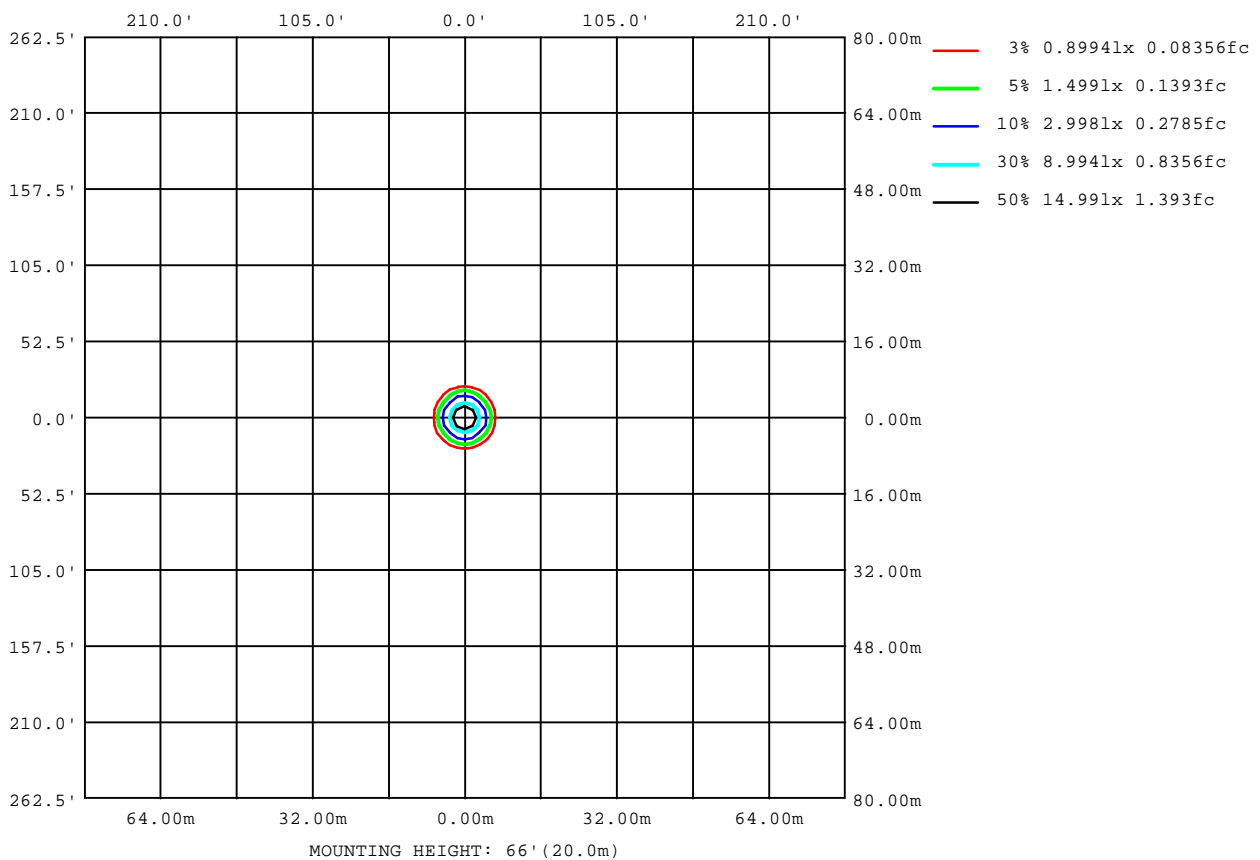

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up

LED Avg.L Report

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	381
L_0~180(75)av	43
L_0~180(85)av	101
L_90~270(65)av	312
L_90~270(75)av	41
L_90~270(85)av	83
L_45(65)av	365
L_45(75)av	30
L_45(85)av	32

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up

Planar Illuminance Curve

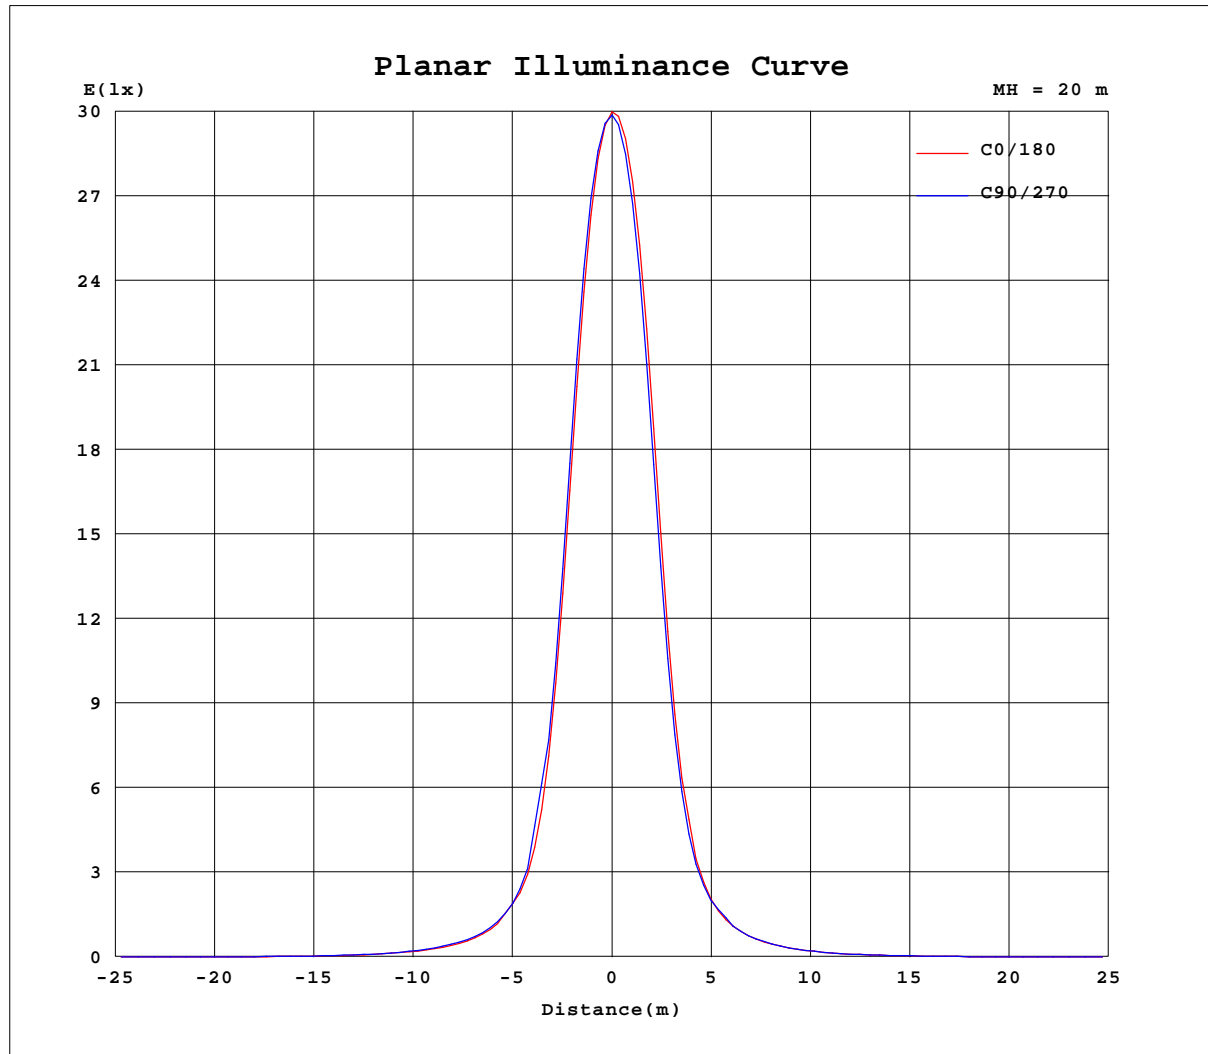

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Zoe
 Test Date: 2022-3-9

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
 Humidity: 65.0%
 Test Distance: 3.160m [K=1.0000]
 Remarks: LAMP: CMA1306-0000-000N0U0A30G Ra:90
 LENS: PM-1083 15R
 DRIVER: 9290014101 350mA
 30minutes warm-up



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.26V I:0.0746A P:16.124W PF:0.9788 Freq:49.99Hz Lamp Flux:1103.84x1 lm		
NAME: 2118.615-ACOT-36	TYPE:	WEIGHT:
SPEC.:3000K	DIM.:	SERIAL No.:2203090134
MFR.: RISE	SUR.:0.003316625m2	Shielding Angle:

Table--1

UNIT: ×10cd

C(°) g (°)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1196	1196	1196	1196	1196	1196	1196	1196	1196	1196	1196	1196						
5	817	871	835	859	880	890	899	846	877	853	835	823						
10	219	268	224	258	247	277	265	239	258	246	253	222						
15	68.4	70.8	70.1	69.1	71.7	71.7	73.1	71.5	75.9	75.6	69.8	69.4						
20	27.9	30.5	29.2	30.5	30.5	31.0	30.7	29.9	32.4	31.2	29.8	27.9						
25	13.8	15.1	14.7	15.3	15.2	15.3	15.3	14.8	15.9	15.3	14.7	13.9						
30	7.40	7.86	7.80	7.97	8.12	8.08	8.05	7.86	8.24	8.13	7.72	7.51						
35	4.18	4.45	4.26	4.42	4.41	4.48	4.52	4.44	4.66	4.55	4.40	4.26						
40	2.35	2.51	2.36	2.40	2.44	2.56	2.65	2.52	2.58	2.47	2.44	2.41						
45	1.32	1.40	1.32	1.31	1.34	1.41	1.45	1.41	1.43	1.38	1.37	1.37						
50	0.70	0.74	0.68	0.67	0.70	0.75	0.78	0.76	0.76	0.73	0.71	0.73						
55	0.27	0.30	0.27	0.28	0.29	0.32	0.32	0.32	0.32	0.30	0.28	0.30						
60	0.16	0.18	0.16	0.17	0.17	0.18	0.18	0.19	0.19	0.19	0.17	0.18						
65	0.04	0.05	0.04	0.04	0.05	0.06	0.07	0.06	0.06	0.05	0.04	0.04						
70	0.01	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.01	0.01	0.00	0.00						
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Zoe
Test Date:2022-3-9

g Range: 0 - 180DEG
Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.416
Humidity:65.0%
Test Distance:3.160m [K=1.0000]
Remarks: LAMP:CMA1306-0000-000N0U0A30G Ra:90
LENS:PM-1083 15R
DRIVER:9290014101 350mA
30minutes warm-up