





## BRAVO-85-STLA1



## Product specification

## INTERIOR RECESSED DOWNLIGHTS

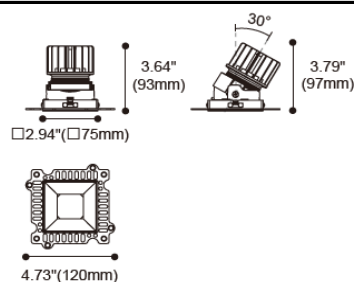


## Technical Specification

|                                          |                   |
|------------------------------------------|-------------------|
| Article number                           | 2118.653A-ACOT-35 |
| LED Consumption                          | 10W               |
| Fixture Consumption                      | -                 |
| Current / Voltage                        | 800mA / 12Vdc     |
| CRI                                      | 90+               |
| CCT                                      | 3000K             |
| LED Lumen <sup>*1</sup>                  | 774lm             |
| Delivered Lumen                          | -                 |
| Beam Angle available                     | 6° (Lens)         |
| Driver Technical Specification (Remoted) |                   |
| Driver Brand                             | -                 |
| Driver Model                             | -                 |
| Input voltage / Frequency range          | -                 |
| Output Current / Voltage                 | -                 |
| Dimming / Flicker                        | -                 |
| Certification                            | -                 |
| Power Factor                             | -                 |
| Warranty                                 | -                 |

| Technical character   |                   | Materials              |                   |
|-----------------------|-------------------|------------------------|-------------------|
| Products Standard     | IEC 60598-1       | Luminaire              | Aluminum die cast |
|                       | IEC 62031         | Trim                   | Aluminum die cast |
| Insulation            | CLASS II          | Optics                 | PC Lens           |
| Protection            | IP44              | Heat sink              | Forged aluminum   |
| Tilt / Rotate         | 0~30° / Non       | Baffle                 | Aluminum die cast |
| Operating temperature | 0~35°C            | Baffle Color available | white / black     |
| Average Failure Time  | L80(12k)>72600(h) |                        |                   |

## Accessories

## Photometric

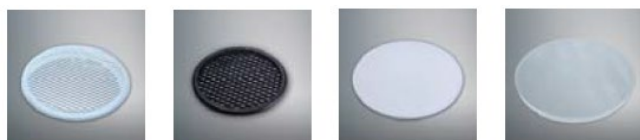SG7-1  
Striped glassH7-1  
Honeycomb louverDS7-1  
Diffusion sheetWG7-1  
Woven glassACOT-82  
MR16 Accessory kitsACOT-83  
GU10 Accessory kitsPJ-0079  
MR16&GU10 Accessory

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.