




BRAVO-85-STLA1



Product specification

INTERIOR RECESSED DOWNLIGHTS

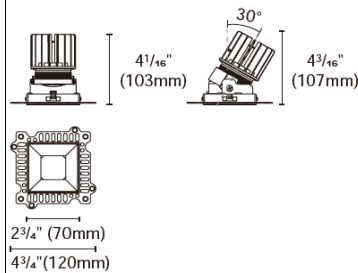

Cut out :
3 5/32" X 3 5/32"

Technical Specification

Article number	2118.653A-LEA-01
LED Consumption	8W
Fixture Consumption	-
Current / Voltage	200mA / 35.5Vdc
CRI	90+
CCT	3000K
LED Lumen ^{*1}	756lm
Delivered Lumen	-
Beam Angle available	15°/24°/36°/50° (Lens)

Driver Technical Specification

Driver Brand	EUCHIPS	Driver Model	PUP10A-1WMC-350
Input voltage / Frequency range	120-277Vac / 50/60Hz	Output Current / Voltage	200mA / 9-38Vdc
Dimming / Flicker	0/1-10V dim / Free	Certification	CE/UL
Power Factor	>0.9	Warranty	-

Technical character		Materials	
Products Standard	UL1598	Luminaire	Aluminum die cast
		Trim	Aluminum die cast
Insulation	CLASS III	Optics	PMMA Lens
Protection	Damp Location	Heat sink	Forged aluminum
Tilt / Rotate	0-30° / None	Fixture color available	white / black
Operating temperature	0-35°C	Baffle	Aluminum die cast
Average Failure Time	L70(6k) >33300(h)	Baffle Color available	white / black

Accessories

Photometric



SG7-1
Striped glass



H7-1
Honeycomb louver



DS7-1
Diffusion sheet




WG7-1
Woven glass

Remarks




*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.


INSTALLATION OPTIONS




ACCG-28B-PUP10A-1WMC-350 0/1-10V
ACCG-28B-PUP10D-1WMC-350 DALI
ACCG-28B-PUP10T-1LMC-350 TRIAC
for BRAVO-2.8" round / square (8W)
Type: Gear box

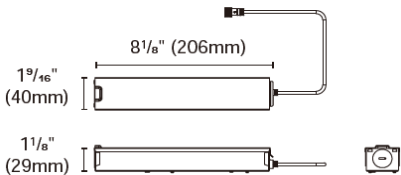

Internal space dimension:
L $4\frac{1}{4}"$ (108mm) X W $1\frac{3}{8}"$ (35mm) X H 1" (26mm)



ACCH-12-80
for BRAVO-2.8" round / square (8W/20W)
Type: New construction plate



ACCI-5
Type: Remodel stand

