





BRAVO-85-RTLF2

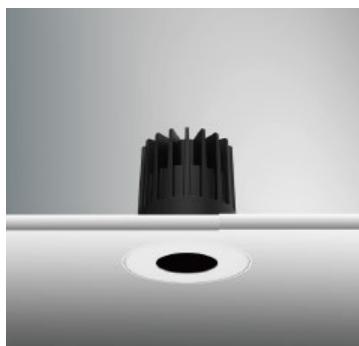

## Product specification

## INTERIOR RECESSED DOWNLIGHTS

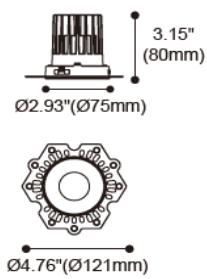

80

## Technical Specification

Article number	2118.655F-ACOT-87		
LED Consumption	12W		
Fixture Consumption	-		
Current / Voltage	350mA / 33.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen *1	1389lm	1446lm	1469lm
Delivered Lumen	-	1012lm	-
Beam Angle available	20°/30°/40°/55° (Lens)		


## Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-


Technical character	Materials
Products Standard	IEC 60598-1 IEC 62031
Insulation	CLASS II
Protection	IP44
Tilt / Rotate	Non / Non
Operating temperature	0~35°C
Average Failure Time	L70(10k) >60000(h)

## Accessories


## Photometric




h(m)	D(m)	E(lx)
20°		
1.0	0.36	4451
2.0	0.71	1113
3.0	1.07	494
4.0	1.42	278
5.0	1.78	178



h(m)	D(m)	E(lx)
30°		
1.0	0.56	3369
2.0	1.12	842
3.0	1.68	374
4.0	2.24	210
5.0	2.79	134



h(m)	D(m)	E(lx)
40°		
1.0	0.78	2130
2.0	1.55	532
3.0	2.33	236
4.0	3.10	133
5.0	3.88	85



h(m)	D(m)	E(lx)
55°		
1.0	1.00	1286
2.0	2.00	321
3.0	2.99	142
4.0	3.99	80
5.0	4.99	51

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.