




BRAVO-85-STLF2



Product specification

INTERIOR RECESSED DOWNLIGHTS

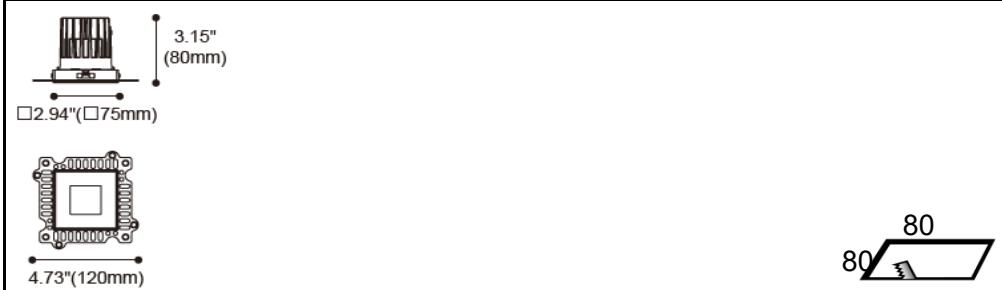

Technical Specification

Article number	2118.657A-ACOT-88
LED Consumption	10W
Fixture Consumption	-
Current / Voltage	800mA / 12Vdc
CRI	90+
CCT	3000K
LED Lumen *1	774lm
Delivered Lumen	449lm
Beam Angle available	9° (Lens)


Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	Non / Non	Baffle	Aluminum die cast
Operating temperature	0~35°C	Baffle Color available	white / black
Average Failure Time	L70(10k) >60000(h)		

Accessories

Photometric



h(m)	D(m)	E(lx)
9°		
1.0	0.14	11488
2.0	0.29	2872
3.0	0.43	1276
4.0	0.57	718
5.0	0.72	460

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.