




## BRAVO-85-STLA2



## Product specification

## INTERIOR RECESSED DOWNLIGHTS

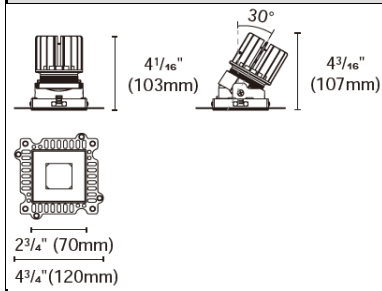

Cut out :  
3<sup>5</sup>/<sub>32</sub>" X 3<sup>5</sup>/<sub>32</sub>"

## Technical Specification

|                         |                        |
|-------------------------|------------------------|
| Article number          | 2118.658A-LEA-01       |
| LED Consumption         | 8W                     |
| Fixture Consumption     | -                      |
| Current / Voltage       | 200mA / 35.5Vdc        |
| CRI                     | 90+                    |
| CCT                     | 3000K                  |
| LED Lumen <sup>*1</sup> | 756lm                  |
| Delivered Lumen         | -                      |
| Beam Angle available    | 15°/24°/36°/50° (Lens) |

## Driver Technical Specification

|                                 |                      |                          |                 |
|---------------------------------|----------------------|--------------------------|-----------------|
| Driver Brand                    | EUCHIPS              | Driver Model             | PUP10A-1WMC-350 |
| Input voltage / Frequency range | 120-277Vac / 50/60Hz | Output Current / Voltage | 200mA / 9-38Vdc |
| Dimming / Flicker               | 0/1-10V dim / Free   | Certification            | CE/UL           |
| Power Factor                    | >0.9                 | Warranty                 | -               |

| Technical character   |                   | Materials               |                   |
|-----------------------|-------------------|-------------------------|-------------------|
| Products Standard     | UL1598            | Luminaire               | Aluminum die cast |
|                       |                   | Trim                    | Aluminum die cast |
| Insulation            | CLASS III         | Optics                  | PMMA Lens         |
| Protection            | Damp Location     | Heat sink               | Forged aluminum   |
| Tilt / Rotate         | 0-30° / None      | Fixture color available | white / black     |
| Operating temperature | 0-35°C            | Baffle                  | Aluminum die cast |
| Average Failure Time  | L70(6k) >33300(h) | Baffle Color available  | white / black     |

## Accessories

## Photometric



SG7-1  
Striped glass



H7-1  
Honeycomb louver



DS7-1  
Diffusion sheet




WG7-1  
Woven glass

## Remarks




\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.


**INSTALLATION OPTIONS**




**ACCG-28B-PUP10A-1WMC-350**    0/1-10V  
**ACCG-28B-PUP10D-1WMC-350**    DALI  
**ACCG-28B-PUP10T-1LMC-350**    TRIAC  
for BRAVO-2.8" round / square (8W)  
Type: Gear box

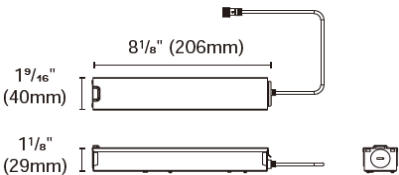

Internal space dimension:  
L  $4\frac{1}{4}"$  (108mm) X W  $1\frac{3}{8}"$  (35mm) X H 1" (26mm)



**ACCH-12-80**  
for BRAVO-2.8" round / square (8W/20W)  
Type: New construction plate



**ACCI-5**  
Type: Remodel stand

