




## SHELL-T-SF2



## Product specification

## INTERIOR TRACK LIGHTS

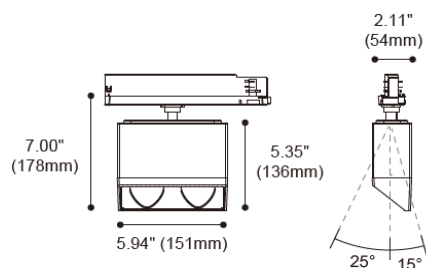

## Technical Specification

Article number	2119.204
LED Consumption	-
Fixture Consumption	42W
Current / Voltage	1050mA / 36V
CRI	90+
CCT	3000K
LED Lumen *1	-
Delivered Lumen	2972lm
Beam Angle available	Wallwash (Reflector)

## Driver Technical Specification (Built-in)

Driver Brand	POWERGEAR	Driver Model	PRO-UA440-W
Input voltage / Frequency range	220-240Vac / 50/60Hz	Output Current / Voltage	1050mA / 25-42Vdc
Dimming / Flicker	Non / Free	Certification	ENEC/CE/CQC
Power Factor	>0.9	Warranty	5years


## Technical character

Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Optics	PC Reflector
Insulation	CLASS II	Heat sink	extruded aluminum
Protection	IP20	Fixture color available	white / black
Tilt / Rotate	0~40° / 0~355°		
Operating temperature	0~35°C		
Average Failure Time	L80(9k)>50000(h)		

## Materials

## Accessories

## Photometric



h(m)	D(m)	E(lx)
Wallwash		
1.0	0.51	4482
2.0	1.02	1120
3.0	1.54	498
4.0	2.05	280
5.0	2.56	179

## Remarks



\*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

