




SHELL-D-SF1



Product specification

INTERIOR RECESSED DOWNLIGHTS

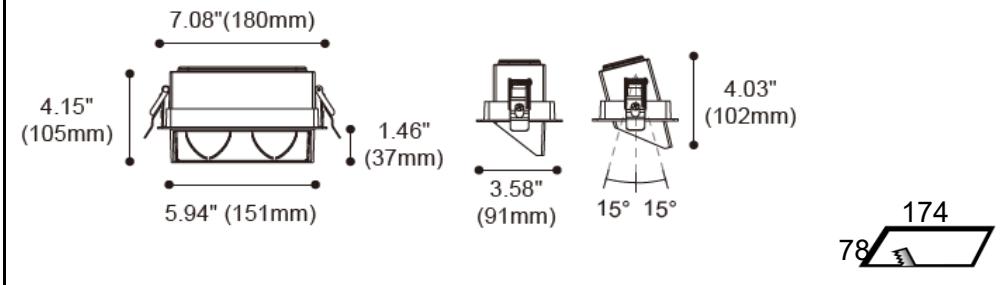

Technical Specification

Article number	2214.405
LED Consumption	-
Fixture Consumption	28W
Current / Voltage	700mA / 36V
CRI	90+
CCT	3000K
LED Lumen ^{*1}	-
Delivered Lumen	2149lm
Beam Angle available	Wallwash (Reflector)


Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Freqency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	extruded aluminum
	IEC 62031	Optics	PC Reflector
Insulation	CLASS II	Heat sink	extruded aluminum
Protection	IP20	Fixture color available	white / black
Tilt / Rotate	0~30° / 0~355°		
Operating temperature	0~35°C		
Average Failure Time	L80(9k)>50000(h)		

Accessories

Photometric



h (m)	D (m)	E (lx)
Wallwash		
1.0	0.57	3859
2.0	1.15	964
3.0	1.72	428
4.0	2.39	241
5.0	2.87	154

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

