




STAR-50-2-STA

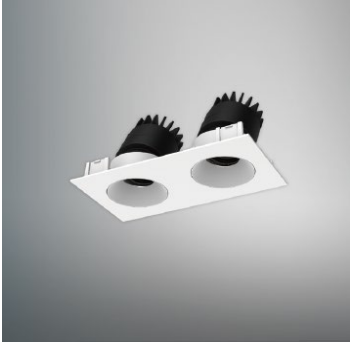

Product specification

INTERIOR COMBO LIGHTS

71mm
70mm
130mm
30°
72mm
61 121

Technical Specification


Article number	2214.410-2-ACOT-96		
LED Consumption	7W x2		
Fixture Consumption	-		
Current / Voltage	350mA / 17.8Vdc		
CRI	90+		
CCT	2700K	3000K	4000K
LED Lumen ^{*1}	618lm x2	656lm x2	716lm x2
Delivered Lumen	-	525lm x2	-
Beam Angle available	20°/25°/35°/50° (Lens)		

Driver Technical Specification (Remoted)

Driver Brand	-	Driver Model	-
Input voltage / Frequency range	-	Output Current / Voltage	-
Dimming / Flicker	-	Certification	-
Power Factor	-	Warranty	-

Technical character		Materials	
Products Standard	IEC 60598-1	Luminaire	Aluminum die cast
	IEC 62031	Trim	Aluminum die cast
Insulation	CLASS II	Optics	PMMA Lens
Protection	IP44	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	L70(11k) >61000(h)	Baffle Color available	white / black


Accessories




ACHO-18
honeycomb louver
+PC sheet

SG-002
Striped Glass

Photometric

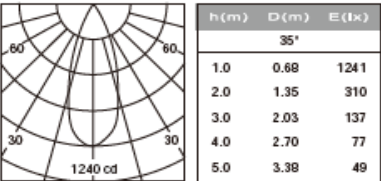

Remarks



*1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.