




STAR-50-2-STA



Product specification

INTERIOR COMBO LIGHTS

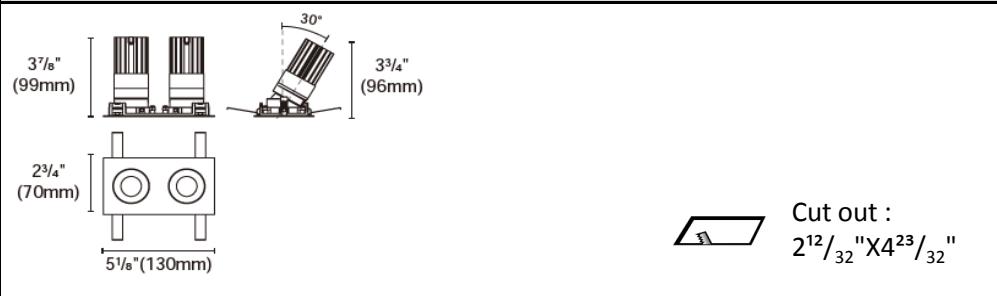

Technical Specification

Article number	2214.410-2-LEA-09B	
LED Consumption	10W x2	8W x2
Fixture Consumption	23W	17W
Current / Voltage	500mA / 18Vdc	400mA / 17.8Vdc
CRI	90+	90+
CCT	3000K	3000K
LED Lumen ¹	913lm x2	813lm x2
Delivered Lumen	-	-
Beam Angle available	20°/25°/35°/50° (Lens)	

Driver Technical Specification (Remoted)

Driver Brand	SCPOWER	Driver Model	KIG-040-DW
Input voltage / Freqency range	100-277Vac / 47-63Hz	Output Current / Voltage	1000mA / 3-40Vdc
Dimming / Flicker	0-10V dimming / Free	Certification	UL / CE / RoHS
Power Factor	>0.9	Warranty	-

Technical character		Materials	
Products Standard	UL2108	Luminaire	Aluminum die cast
	-	Trim	Aluminum die cast
Insulation	CLASS III	Optics	PMMA Lens
Protection	-	Heat sink	Forged aluminum
Tilt / Rotate	0~30° / 0~355°	Fixture color available	white / black
Operating temperature	0~35°C	Baffle	Aluminum die cast
Average Failure Time	-	Baffle Color available	white / black

Accessories

ACHO-18
honeycomb louver
+PC sheetSG-002
Striped Glass


Photometric

Remarks


¹1. LUMEN : for LED chip test result based on Tc=85°C. This is the ideal (Maximum) lumen. This lumen information is from the LED supplier.

INSTALLATION OPTIONS

ACCG-30-KIG-040-DW

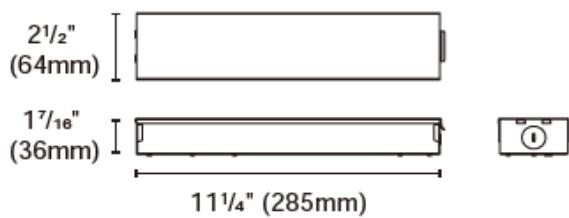

ACCH-13-60X120



ACCH-60X120

